

BALL PLUNGER AND PLUNGERS 2009 UPDATE



 **ROLLMEX**

ART. W842 – W842CIN

BLACK OXIDE TREATED OR STAINLESS STEEL – SPRING PLUNGER WITH GRUB SCREW AND PLASTIC NOSE PIN

MATERIAL:

VERSION W842:

Black-oxide treated automatic steel nose pin plunger body.

VERSION W842CIN:

Stainless steel nose pin plunger body (AISI 303).

NOSE PIN:

(1) White moulded plastic nose pin (Delrin - POM).

SPRING:

(3) Stainless steel spring (AISI 303).

GRUB SCREW:

W842: (2) Black-oxide treated grub screw with hexagon socket end (note: the grub screw is glued in place).

W842CIN: (2) Stainless steel grub screw with hexagon socket end (note: the grub screw is glued in place).

THRUST TYPE:

Normal.


Packs containing 10 pieces.

SPECIAL REQUEST:

- None.



art. W842 CIN

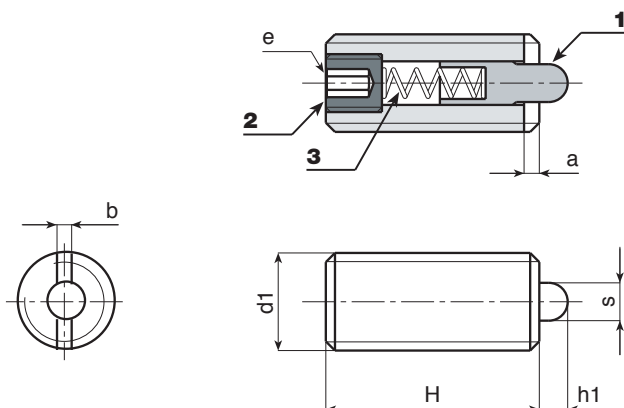

W842 version normal thrust (thrust values in position N1 and N2)

Art.	s	H	h1	e	b	a	N1 (Newton)	N2 (Newton)	d1	Weight (gr)
W842.VBM05	2,4	18	2,3	1,5	0,8	1,2	6	19	M05	1,3
W842.VBM06	2,7	20	2,5	2	0,9	1,3	6	19	M06	2,5
W842.VBM08	3,5	22	3	2,5	1,4	1,5	10	39	M08	5
W842.VBM10	4	22	3	3	1,4	1,5	10	39	M10	9
W842.VBM12	6	28	4	4	2	2,7	12	53	M12	16
W842.VBM16	7,5	32	5	5	2,5	3,2	45	100	M16	35

Enter the pin length in the two .. of the code number

W842 CIN stainless steel version normal thrust (thrust values in position N1 and N2)

INOX

Art.	s	H	h1	e	b	a	N1 (Newton)	N1 (Newton)	d1	Weight (gr)
W842.INM05CIN	2,4	18	2,3	1,5	0,8	1,2	6	19	M05	1,3
W842.INM06CIN	2,7	20	2,5	2	0,9	1,3	6	19	M06	2,5
W842.INM08CIN	3,5	22	3	2,5	1,4	1,5	10	39	M08	5
W842.INM10CIN	4	22	3	3	1,4	1,5	10	39	M10	9
W842.INM12CIN	6	28	4	4	2	2,7	12	53	M12	16
W842.INM16CIN	7,5	32	5	5	2,5	3,2	45	100	M16	35

Enter the pin length in the two .. of the code number

ART. W837 – W838

PLASTIC BALL PLUNGER WITH SLOTTED END AND PLASTIC OR STEEL BALL

MATERIAL:

Plastic ball plunger body (Delrin - POM).

COLOUR:

Blue.

BALL:

W837: Hardened stainless steel ball.

W838: White plastic ball (Delrin - POM).

THRUST TYPE:

Normal.

SPRING:

Stainless steel spring (AISI 302).


Packs containing 10 pieces.

SPECIAL REQUEST:


- None.



White plastic ball

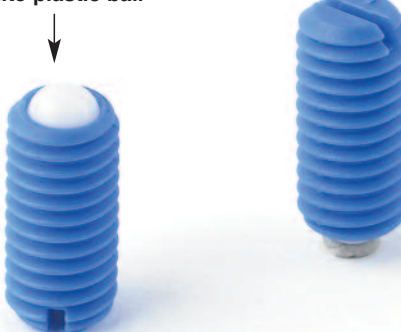

Art. W838

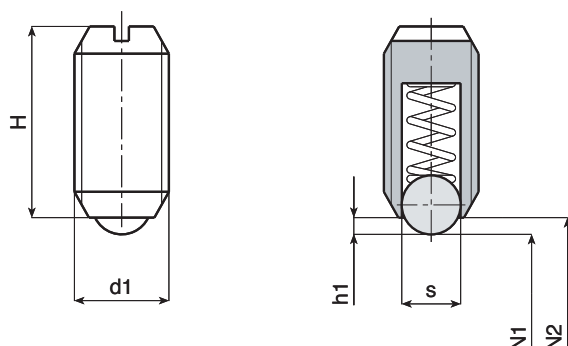

Version W837 - Hardened stainless steel ball

Art.	s	H	h1	N1 (Newton)	N2 (Newton)	d1	Weight (gr)
W837.TM06	3,5	14	1	12	17	M06	0,4
W837.TM08	5	16	1,5	20	35	M08	1,1
W837.TM10	6	19	2	25	45	M10	3

Version W838 - White plastic ball (Delrin - POM)

Art.	s	H	h1	N1 (Newton)	N2 (Newton)	d1	Weight (gr)
W838.TM06	3,5	14	1	12	17	M06	0,4
W838.TM08	5	16	1,5	20	35	M08	1,1
W838.TM10	6	19	2	25	45	M10	3

WPS – BAL PLUN-
GERS AND PLUNGERS

ROLLMEX

ART. W848

BLACK OXIDE TREATED STEEL THREADED GRUB SCREW WITH HEXAGON SOCKET HEAD AND PLASTIC BALL POINT

MATERIAL:

Grub screw shank in black oxide treated high-strength steel (1200 N/mm²).


NOSE PIN:

White plastic ball (Delrin - POM).

Packs containing 10 pieces.

SPECIAL REQUEST:

- None.

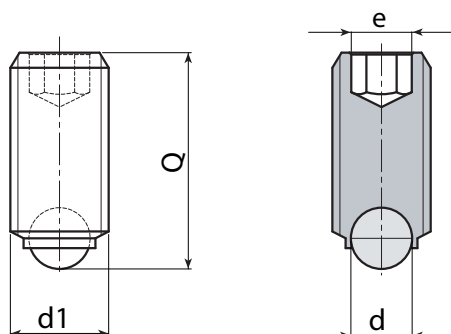

Art.	d1	e	d	Q	Weight (gr)
W848.SBM04X..	M04	2	2,5	6-8-10-12-16	1-1-1-1-1
W848.SBM05X..	M05	2,5	3	10-16-20-25	1-1,7-2-2,9
W848.SBM06X..	M06	3	4	11-13-17-21-26	1,3-1,8-2,4-3-4
W848.SBM08X..	M08	4	4,5	11-13-17-21-26-31	3-3-4-5-7-9
W848.SBM10X..	M10	5	7	14-18-22-27-32-37-42	5-6-9-11-14-16-19
W848.SBM12X..	M12	6	8,5	18-22-27-32-42-52	10-11-15-18-21,5-32

Enter the pin length in the two .. of the code number

ART. W849 – W849CIN

BLACK OXIDE TREATED STEEL – OR STAINLESS STEEL – THREADED GRUB SCREW WITH HEXAGON SOCKET HEAD AND BALL POINT

MATERIAL:

VERSION W849:

Grub screw shank in black oxide treated high-strength steel (1200 N/mm²).

VERSION W849CIN:

Grub screw shank in stainless steel (AISI 303).

NOSE PIN:

VERSION W849:

Hardened ball bearing steel ball.

VERSION W849CIN:


Hardened stainless steel ball.

Packs containing 10 pieces.



SPECIAL REQUESTS:

- On request diameters M04 and M20 are also available.

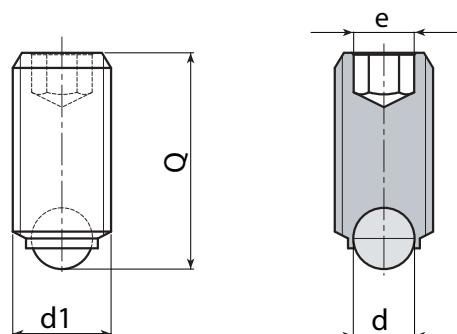

Version W849 in black oxide treated quenched and tempered steel

Art.	d1	e	d	Q	Weight (gr)
W849.SBM04X..	M04	2	2,5	6-8-10-12-16	1-1-1-1-1
W849.SBM05X..	M05	2,5	3	10-16-20-25	1-1,7-2-2,9
W849.SBM06X..	M06	3	4	11-13-17-21-26	1,3-1,8-2,4-3-4
W849.SBM08X..	M08	4	4,5	11-13-17-21-26-31	3-3-4-5-7-9
W849.SBM10X..	M10	5	7	14-18-22-27-32-37-42	5-6-9-11-14-16-19
W849.SBM12X..	M12	6	8,5	18-22-27-32-42-52	10-11-15-18-21,5-32
W849.SBM16X..	M16	8	12	23-28-38-53	22-28-41-48
W849.SBM20X..	M20	10	15	34-44-54-64	54-74-94-120

Enter the pin length in the two .. of the code number

Version W849CIN in STAINLESS STEEL

Art.	d1	e	d	Q	Weight (gr)
W849.INM04X..CIN	M04	2	2,5	6-8-10-12-16	1-1-1-1-1
W849.INM05X..CIN	M05	2,5	3	10-16-20-25	1-1,7-2-2,9
W849.INM06X..CIN	M06	3	4	11-13-17-21-26	1,3-1,8-2,4-3-4
W849.INM08X..CIN	M08	4	5,5	11-13-17-21-26-31	3-3-4-5-7-9
W849.INM10X..CIN	M10	5	7	14-18-22-27-32-37-42	5-6-9-11-14-16-19
W849.INM12X..CIN	M12	6	8,5	18-22-27-32-42-52	10-11-15-18-21,5-32

Enter the pin length in the two .. of the code number

WPS – BAL PLUN-
GERS AND PLUNGERS

ROLLMEX

ART. W851 – W851CIN

BLACK OXIDE TREATED STEEL – OR STAINLESS STEEL – WITH HEXAGON SOCKET HEAD AND FLATTENED BALL POINT

MATERIAL:

VERSION W851:

Grub screw shank in black oxide treated high-strength steel (1200 N/mm²).

VERSION W851CIN:

Stainless steel (AISI 303) grub screw shank.

NOSE PIN:

VERSION W851:

Flattened, hardened ball bearing steel ball. Optimal angle of adaptation between 0° and 9°.

Ball is not fixed, free to rotate.

VERSION W851CIN:


Flattened, hardened stainless steel ball. Optimal angle of adaptation between 0° and 9°.

Ball is not fixed, free to rotate.

Packs containing 10 pieces.

SPECIAL REQUEST:

- On request diameter M24 for version W851 is also available.

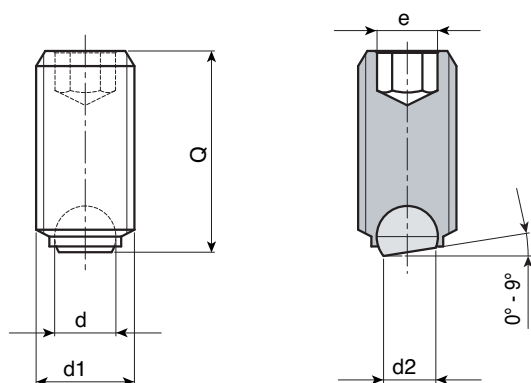

Version W851 in black oxide treated high-strength steel

Art.	d1	e	d	d2	Q	Weight (gr)
W851.SBM04X..	M04	2	2,5	1,8	5,6-7,6-9,6-11,6-15,6	1-1-1-1-1
W851.SBM05X..	M05	2,5	3	2,2	7,5-9,5-11,5-15,5-19,5-24,5	1-1-1,5-1,5-2,5-3
W851.SBM06X..	M06	3	4	3,2	10-12-16-20-25	1,5-1,8-2,5-3-4
W851.SBM08X..	M08	4	5,5	4,5	10-12-16-20-25-30	2,5-3,5-4-5,2-7,3-9
W851.SBM10X..	M10	5	7	6	12-16-20-25-30-35-40	5-7-9-11-14-16-19
W851.SBM12X..	M12	6	8,5	7,2	16-20-25-30-40-50	10-12,5-15-20-28,5-37,5
W851.SBM16X..	M16	8	12	10,7	20-25-35-50	22-28-41-48
W851.SBM20X..	M20	10	15	13,5	30-40-50-60	54-74-94-120

Enter the pin length in the two .. of the code number

Version W851CIN in stainless steel

Art.	d1	e	d	d2	Q	Weight (gr)
W851.INM04X..CIN	M04	2	2,5	1,8	5,6-7,6-9,6-11,6-15,6	1-1-1-1-1
W851.INM05X..CIN	M05	2,5	3	2,2	7,5-9,5-11,5-15,5-19,5-24,5	1-1-1,5-1,5-2,5-3
W851.INM06X..CIN	M06	3	4	3,2	10-12-16-20-25	1,5-1,8-2,5-3-4
W851.INM08X..CIN	M08	4	5,5	4,5	10-12-16-20-25-30	2,5-3,5-4-5,2-7,3-9
W851.INM10X..CIN	M10	5	7	6	12-16-20-25-30-35-40	5-7-9-11-14-16-19
W851.INM12X..CIN	M12	6	8,5	7,2	16-20-25-30-40-50	10-12,5-15-20-28,5-37,5

Enter the pin length in the two .. of the code number

WPS – BAL PLUN-
GERS AND PLUNGERS

ROLLMEX

BLACK OXIDE TREATED STEEL THREADED GRUB SCREW WITH HEXAGON SOCKET HEAD AND FLATTENED KNURLED BALL POINT

MATERIAL:

Grub screw shank in black oxide treated high-strength steel (1200 N/mm²).

NOSE PIN:

Knurled, flattened, hardened ball bearing steel ball.


Optimal angle of adaptation between 0° and 9°.

Ball is not fixed, free to rotate.

Packs containing 10 pieces.

SPECIAL REQUEST:

- None.

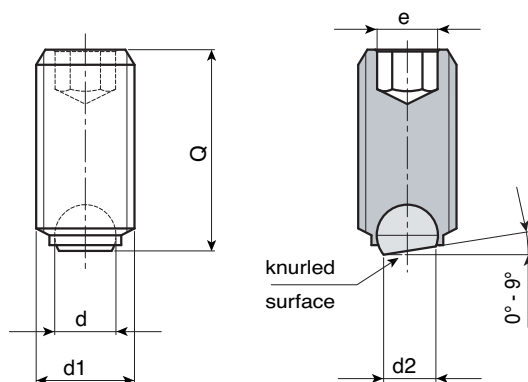

Art.	d1	e	d	d2	Q	Weight (gr)
W852.SBM08X..	M08	4	5,5	4,5	10-12-16-20-25-30	2,5-3,5-4-5,7-7,3-9
W852.SBM10X..	M10	5	7	6	12-16-20-25-30-35-40	5-7-9-11-14-16-19
W852.SBM12X..	M12	6	8,5	7,2	16-20-25-30-40-50	10-12,5-15-20-28,5-37,5
W852.SBM16X..	M16	8	12	10,7	20-25-35-50	22-28-41-48
W852.SBM20X..	M20	10	15	13,5	30-40-50-60	54-74-94-120

Enter the pin length in the two .. of the code number

BLACK OXIDE TREATED STEEL THREADED GRUB SCREW WITH HEXAGON SOCKET HEAD AND FLATTENED PLASTIC BALL POINT

MATERIAL:

Grub screw shank in black oxide treated quenched and tempered steel (1200 N/mm²).

NOSE PIN:

Flattened white plastic ball (Delrin - POM).


Optimal angle of adaptation between 0° and 9°.

Ball is not fixed, free to rotate.

Packs containing 10 pieces.

SPECIAL REQUEST:

- None.

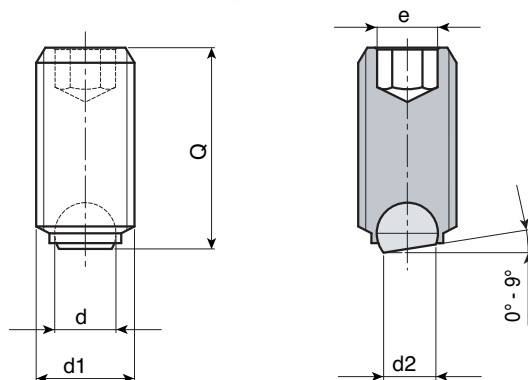

Art.	d1	e	d	d2	Q	Weight (gr)
W853.SBM04X..	M04	2	2,5	1,8	5,9-7,9-9,9-11,9,15,9	1-1-1-1-1
W853.SBM05X..	M05	2,5	3	2,2	7,8-9,8-11,8,15,8,19,8-24,8	1-1-1-1,5-2-2,5
W853.SBM06X..	M06	3	4	3,2	10,3-12,3-16,3-20,3-25,3	1-1,5-2-3-3,5
W853.SBM08X..	M08	4	5,5	4,5	10,4-12,4-16,4-20,4-25,4,30,4	2-2,5-3-5-6-7,5

Enter the pin length in the two .. of the code number

ART. W860 – W860CIN

BLACK OXIDE TREATED STEEL – OR STAINLESS STEEL – WITH HEXAGON SOCKET HEAD AND BRASS POINT

MATERIAL:

W860: Grub screw shank in black oxide treated high-strength steel (1200 N/mm²).

W860CIN: Stainless steel (Aisi 303) grub screw shank.


NOSE PIN:

Fixed brass cylindrical point.

Packs containing 10 pieces.

SPECIAL REQUEST:

- None.

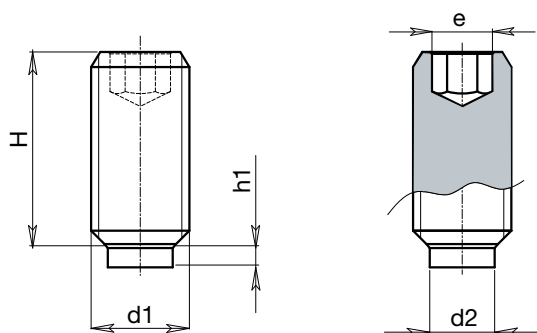

Version W860 in black oxide treated steel

Art.	d1	e	h1	d2	H	Weight (gr)
W860.SBM04X..	M04	2	1,2	2,5	6,5-10,5-16,5	1-1-1
W860.SBM05X..	M05	2,5	1,3	3	8,5-12,5-20,5	1-1,5-2,5
W860.SBM06X..	M06	3	1,9	4	11,5-17,5-26,5	2-2,5-4
W860.SBM08X..	M08	4	2,5	5,5	12-22-32	3-6-9
W860.SBM10X..	M10	5	2,7	7	14-18-27-37	5,5-7-11,5-16,5
W860.SBM12X..	M12	6	3,4	8,5	18,5-22,5-32,5-42,5	10,5-13-20-29

Enter the pin length in the two .. of the code number

Version W860CIN in STAINLESS STEEL

Art.	d1	e	h1	d2	H	Weight (gr)
W860.INM04X..CIN	M04	2	1,2	2,5	6,5-10,5-16,5	1-1-1
W860.INM05X..CIN	M05	2,5	1,3	3	8,5-12,5-20,5	1-1,5-2,5
W860.INM06X..CIN	M06	3	1,9	4	11,5-17,5-26,5	2-2,5-4
W860.INM08X..CIN	M08	4	2,5	5,5	12-22-32	3-6-9
W860.INM10X..CIN	M10	5	2,7	7	14-18-27-37	5,5-7-11,5-16,5
W860.INM12X..CIN	M12	6	3,4	8,5	18,5-22,5-32,5-42,5	10,5-13-20-29

Enter the pin length in the two .. of the code number

WPS – BAL PLUN-
GERS AND PLUNGERS

ROLLMEX

ART. W861 – W861CIN

BLACK OXIDE TREATED STEEL – OR STAINLESS STEEL – WITH HEXAGON SOCKET HEAD AND PLASTIC POINT

MATERIAL:

W861: Black oxide treated steel grub screw shank.

W861CIN: Stainless steel (Aisi 303) grub screw shank.


NOSE PIN:

Fixed plastic cylindrical point (Delrin).

Packs containing 10 pieces.

SPECIAL REQUEST:

- None.

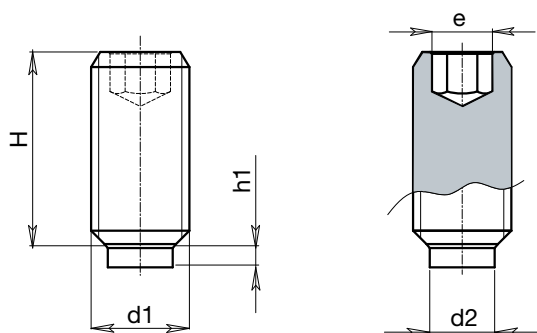

Version W861 in black oxide treated steel

Art.	d1	e	h1	d2	H	Weight (gr)
W861.SBM04X..	M04	2	1	2	7-9-11-13-17-21	1-1-1-1-1-1,5
W861.SBM05X..	M05	2,5	1	3	9-11-13-17-21-26	1-1-1-2-2-3
W861.SBM06X..	M06	3	1,3	3,5	11-13-17-21-26-33-41-51	1-1,5-2-3-4-5-6-8
W861.SBM08X..	M08	4	1,6	5	13,5-17,5-21,5-26,5-33,5-41,5-51,5-64,5	2-4-5-7-9-11-14-18
W861.SBM10X..	M10	5	1,9	6,5	18-22-27-34-42-52-65-82	5-7-9-13-16-21-28-36
W861.SBM12X..	M12	6	2,1	8	22-27-34-42-52-65-82-102	9-13-18-24-31-40-52-66

Enter the pin length in the two .. of the code number

Version W861CIN in stainless steel

Art.	d1	e	h1	d2	H	Weight (gr)
W861.INM04X..CIN	M04	2	1	2	7-9-11-13-17	1-1-1-1-1
W861.INM05X..CIN	M05	2,5	1	3	9-11-13-17-21	1-1-1-2-2
W861.INM06X..CIN	M06	3	1,3	3,5	11-13-17-21-26-33	1-1,5-2-3-4-5
W861.INM08X..CIN	M08	4	1,6	5	13,5-17,5-21,5-26,5-33,5-41,5	2-4-5-7-9-11
W861.INM10X..CIN	M10	5	1,9	6,5	18-22-27-34-42-52	5-7-9-13-16-21
W861.INM12X..CIN	M12	6	2,1	8	22-27-34-42-52-65	9-13-18-24-31-40

Enter the pin length in the two .. of the code number

SERIE W793

KNOB INDEXING PLUNGER WITH HANDWHEEL LOCKING SYSTEM – IN GALVANISED STEEL AND STAINLESS STEEL – WITH OR WITHOUT LOCK NUT



art. W793



art. W794



art. W793 CIN

Version W793 Knob-style galvanised steel indexing plunger with handwheel locking system

Art	D	d	H	h	s	e	d2	d1 ^{-0.02 -0.04}	Q	Weight (gr)
W793.J0401	14	7	36	12	8	6	M06	4	4	5
W793.J0501	18	9	46	16	10	8	M08	5	5	11
W793.J0601	22	11	55	20	11	10	M10	6	6	24
W793.J0801	24	13	66	24	14	12	M12	8	8	39

Version W794 Knob-style galvanised steel indexing plunger with handwheel locking system and lock nut

Art.	D	d	H	h	s	e	d2	e2	s2	d1 ^{-0.02 -0.04}	Q	Weight (gr)
W794.J0401	14	7	36	12	8	6	M06	10	4	4	4	7
W794.J0501	18	9	46	16	10	8	M08	13	5	5	5	16
W794.J0601	22	11	55	20	11	10	M10	17	6	6	6	32
W794.J0801	24	13	66	24	14	12	M12	19	7	8	8	51

Version W793 CIN Knob-style stainless steel indexing plunger with handwheel locking system

Art	D	H	h	s	A	e	d2	d1 ^{-0.02 -0.04}	Q	Weight (gr)
W793.J0401CIN	14	7	36	12	8	6	M06	4	4	5
W793.J0501CIN	18	9	46	16	10	8	M08	5	5	11
W793.J0601CIN	22	11	55	20	11	10	M10	6	6	24
W793.J0801CIN	24	13	66	24	14	12	M12	8	8	39

INOX

Version W794 CIN Knob-style stainless steel indexing plunger with handwheel locking system and lock nut

Art.	D	d	H	h	s	e	d2	e2	s2	d1 ^{-0.02 -0.04}	Q	Weight (gr)
W794.J0401CIN	14	7	36	12	8	6	M06	10	4	4	4	7
W794.J0501CIN	18	9	46	16	10	8	M08	13	5	5	5	16
W794.J0601CIN	22	11	55	20	11	10	M10	17	6	6	6	32
W794.J0801CIN	24	13	66	24	14	12	M12	19	7	8	8	51

INOX

**WPS – BAL PLUN-
GERS AND PLUNGERS**

ROLLMEX

W794 CIN

Knob-style stainless steel indexing plunger with handwheel locking system and lock nut.


(4) Reinforced polyamide scallop knob. Cannot be removed. Resistant to oils and greases.

(5) Threaded galvanised steel lock nut. (UNI 5589).

(5) Stainless steel (AISI 304) lock nut. (UNI 5589).

Packs containing 10 pieces.

- None.



SERIE W795

KNOB INDEXING PLUNGER – IN GALVANISED STEEL AND STAINLESS STEEL – WITH OR WITHOUT LOCK NUT



art. W795



art. W796



art. W795 CIN

Version W795 Knob-style galvanised steel indexing plunger

Art	D	H	h	s	d	e	d2	d1 ^{-0.02 -0.04}	Q	Weight (gr)
W795.J0401	14	33	12	5	7	6	M06	4	4	5
W795.J0501	18	42	16	6	9	8	M08	5	5	11
W795.J0601	22	52	20	7,5	11	10	M10	6	6	23
W795.J0801	24	62	24	9	13	12	M12	8	8	38

Version W796 Knob-style galvanised steel indexing plunger with lock nut

Art	D	H	h	s	d	e	e2	s2	d2	d1 ^{-0.02 -0.04}	Q	Weight (gr)
W796.J0401	14	33	12	5	7	6	10	4	M06	4	4	5
W796.J0501	18	42	16	6	9	8	13	5	M08	5	5	11
W796.J0601	22	52	20	7,5	11	10	17	6	M10	6	6	23
W796.J0801	24	62	24	9	13	12	19	7	M12	8	8	38

Version W795 CIN Knob-style stainless steel indexing plunger

Art	D	H	h	s	d	e	d2	d1 ^{-0.02 -0.04}	Q	Weight (gr)
W795.J0401CIN	14	33	12	5	7	6	M06	4	4	5
W795.J0501CIN	18	42	16	6	9	8	M08	5	5	11
W795.J0601CIN	22	52	20	7,5	11	10	M10	6	6	23
W795.J0801CIN	24	62	24	9	13	12	M12	8	8	38

INOX

Version W796 CIN Knob-style stainless steel indexing plunger with lock nut

Art	D	H	h	s	d	e	e2	s2	d2	d1 ^{-0.02 -0.04}	Q	Weight (gr)
W796.J0401CIN	14	33	12	5	7	6	10	4	M06	4	4	5
W796.J0501CIN	18	42	16	6	9	8	13	5	M08	5	5	11
W796.J0601CIN	22	52	20	7,5	11	10	17	6	M10	6	6	23
W796.J0801CIN	24	62	24	9	13	12	19	7	M12	8	8	38

INOX

**WPS – BAL PLUN-
GERS AND PLUNGERS**

ROLLMEX

VERSIONS:

- W795** Knob-style galvanised steel indexing plunger.
W796 Knob-style galvanised steel indexing plunger with lock nut.
W795 CIN Knob-style stainless steel indexing plunger.
W796 CIN Knob-style stainless steel indexing plunger with lock nut.

MATERIAL:

(4) Reinforced polyamide scallop knob. Cannot be removed. Resistant to oils and greases.

VERSIONS W795 AND W796

- (1) Stainless steel (AISI 303) plunger pin.
(2) Galvanised automatic steel indexing plunger body.
(3) Galvanised steel spring.
(5) Threaded galvanised steel lock nut. (UNI 5589).

VERSIONS W795 CIN AND W796 CIN


- (1) Stainless steel (AISI 303) plunger pin.
(2) Stainless steel (AISI 303) indexing plunger body.
(3) Stainless steel spring. (AISI 303).
(5) Stainless steel (AISI 304) lock nut. (UNI 5589).

ATTENTION: the manufacturer recommends making the lodging hole for the plunger pin with tolerance H7.

Packs containing 10 pieces.

SPECIAL REQUEST:

- None.

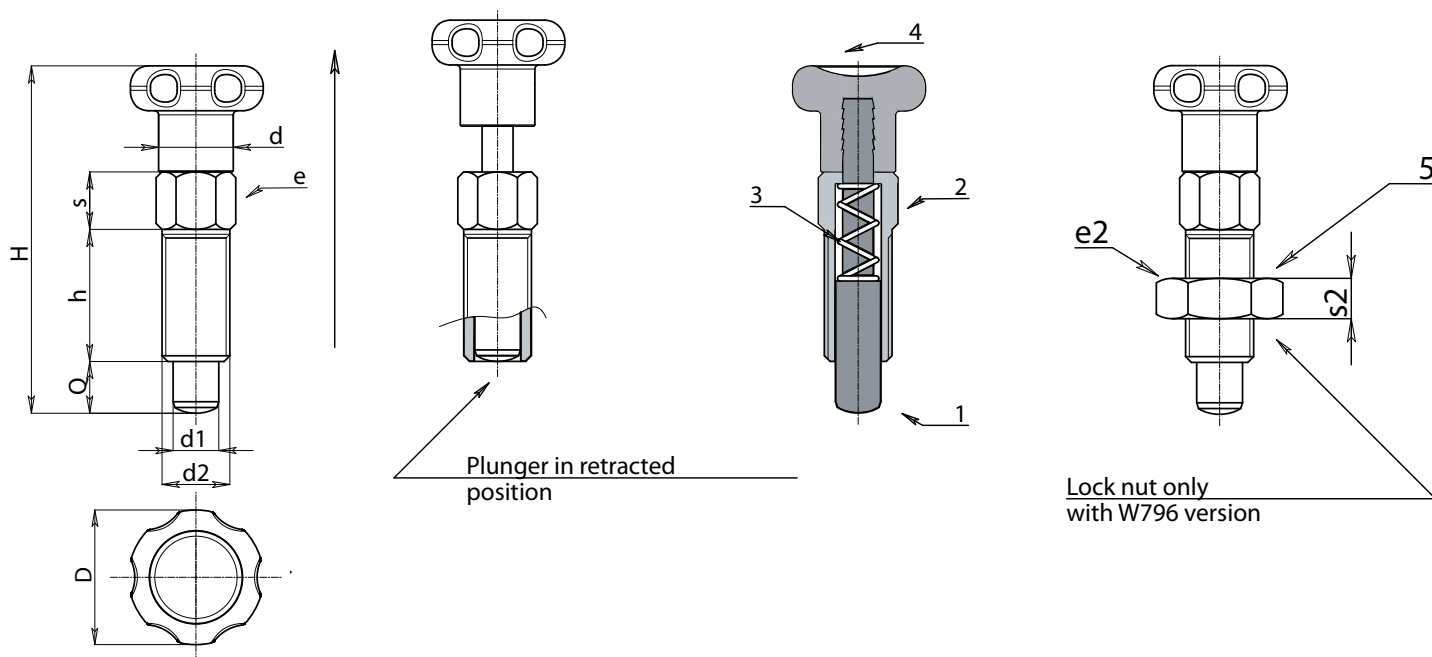

W797-W798

RING INDEXING PLUNGER - IN GALVANISED STEEL AND STAINLESS STEEL - WITH OR WITHOUT LOCK NUT



art. W797



art. W798



art. W797 CIN

Versione W797 Galvanised steel indexing plunger with ring

Art	D	H	h	s	A	e	d2	d1 $\begin{smallmatrix} -0,02 \\ -0,04 \end{smallmatrix}$	Q	Weight (gr)
W797.J04	15	35,5	12	4,5	2	6	M06	4	4	5
W797.J05	19	46	16	6	2,5	8	M08	5	5	11
W797.J06	27	60,5	20	7,5	3	10	M10	6	6	23
W797.J08	33	74	24	9	3,5	12	M12	8	8	38

Versione W798 Galvanised steel indexing plunger with ring and lock nut

Art.	D	H	h	s	A	e	e2	s2	d2	d1 $\begin{smallmatrix} -0,02 \\ -0,04 \end{smallmatrix}$	Q	Weight (gr)
W798.J04	15	35,5	12	4,5	2	6	10	4	M06	4	4	7
W798.J05	19	46	16	6	2,5	8	13	5	M08	5	5	16
W798.J06	27	60,5	20	7,5	3	10	17	6	M10	6	6	31
W798.J08	33	74	24	9	3,5	12	19	7	M12	8	8	50

Versione W797 CIN Stainless steel indexing plunger with ring

Art	D	H	h	s	A	e	d2	d1 $\begin{smallmatrix} -0,02 \\ -0,04 \end{smallmatrix}$	Q	Weight (gr)
W797.J04CIN	15	35,5	12	4,5	2	6	M06	4	4	5
W797.J05CIN	19	46	16	6	2,5	8	M08	5	5	11
W797.J06CIN	27	60,5	20	7,5	3	10	M10	6	6	23
W797.J08CIN	33	74	24	9	3,5	12	M12	8	8	38

INOX

Versione W798 CIN Stainless steel indexing plunger with ring and lock nut

Art.	D	H	h	s	A	e	e2	s2	d2	d1 $\begin{smallmatrix} -0,02 \\ -0,04 \end{smallmatrix}$	Q	Weight (gr)
W798.J04CIN	15	35,5	12	4,5	2	6	10	4	M06	4	4	7
W798.J05CIN	19	46	16	6	2,5	8	13	5	M08	5	5	16
W798.J06CIN	27	60,5	20	7,5	3	10	17	6	M10	6	6	31
W798.J08CIN	33	74	24	9	3,5	12	19	7	M12	8	8	50

INOX

**WPS - BAL PLUN-
GERS AND PLUNGERS**

ROLLMEX

VERSIONS:

- W797** Galvanised steel indexing plunger with ring.
W798 Galvanised steel indexing plunger with ring and lock nut.
W797 CIN Stainless steel indexing plunger with ring.
W798 CIN Stainless steel indexing plunger with ring and lock nut.

MATERIAL:

VERSIONS W797 AND W798

- (1) Stainless steel (AISI 303) plunger pin.
- (2) Galvanised automatic steel indexing plunger body.
- (3) Galvanised steel spring.
- (4) Harmonic stainless steel circlip.
- (5) Threaded galvanised steel lock nut. (UNI 5589).

VERSIONS W797 CIN AND W798 CIN

- (1) Stainless steel (AISI 303) plunger pin.
- (2) Stainless steel (AISI 303) indexing plunger body.
- (3) Stainless steel spring. (AISI 303).
- (4) Harmonic stainless steel circlip.
- (5) Stainless steel (AISI 304) lock nut. (UNI 5589).




art. W798

ATTENTION: the manufacturer recommends making the lodging hole for the plunger pin with tolerance H7.

Packs containing 10 pieces.

SPECIAL REQUEST:

- None.

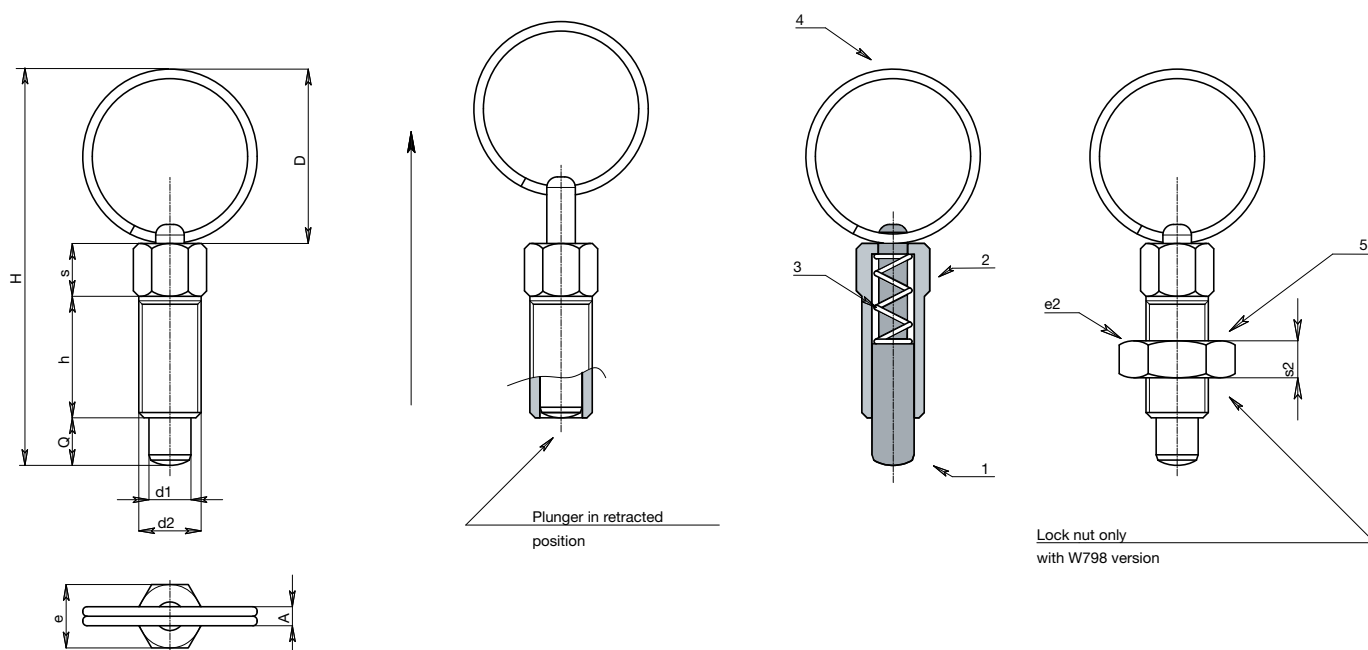

ART. W804 – W805

KNOB STYLE BLACK OXIDE TREATED INDEXING PLUNGER OR STAINLESS STEEL -WITHOUT RING NUT – WITH OR WITHOUT LOCK NUT



W804 version Knob-style black oxide treated indexing plunger without ring nut

Art.	D	H	h	d2	d	d1 ^{-0.02 -0.04}	Q	Weight (gr)	WRENCH
W804.Q0501	22	45	22	M10x1	12	05	5	16	W807.05
W804.Q0601	27	54	26	M12x1,5	14	06	6	28	W807.06
W804.Q0801	33	68	34	M16x1,5	19	08	8	64	W807.08
W804.Q1001	33	79	43	M20x1,5	19	10	10	113	W807.10

W805 version Knob-style black oxide treated indexing plunger without ring nut with lock nut

Art.	D	H	h	d2	d	e2	s2	d1 ^{-0.02 -0.04}	Q	Weight (gr)	WRENCH
W805.Q0501	22	45	22	M10x1	12	17	6	05	5	23	W807.05
W805.Q0601	27	54	26	M12x1,5	14	19	7	06	6	38	W807.06
W805.Q0801	33	68	34	M16x1,5	19	24	8	08	8	82	W807.08
W805.Q1001	33	79	43	M20x1,5	19	30	9	10	10	133	W807.10

W804 CIN version Knob-style stainless steel indexing plunger without ring nut

INOX

Art.	D	H	h	d2	d	d1 ^{-0.02 -0.04}	Q	Weight (gr)	WRENCH
W804.I0501CIN	22	45	22	M10x1	12	05	5	16	W807.05
W804.I0601CIN	27	54	26	M12x1,5	14	06	6	28	W807.06
W804.I0801CIN	33	68	34	M16x1,5	19	08	8	64	W807.08
W804.I1001CIN	33	79	43	M20x1,5	19	10	10	113	W807.10

W805 CIN version Knob-style stainless steel indexing plunger without ring nut with lock nut

INOX

Art.	D	H	h	d2	d	e2	s2	d1 ^{-0.02 -0.04}	Q	Weight (gr)	WRENCH
W805.I0501CIN	22	45	22	M10x1	12	17	6	05	5	23	W807.05
W805.I0601CIN	27	54	26	M12x1,5	14	19	7	06	6	38	W807.06
W805.I0801CIN	33	68	34	M16x1,5	19	24	8	08	8	82	W807.08
W805.I1001CIN	33	79	43	M20x1,5	19	30	9	10	10	133	W807.10

**WPS – BAL PLUN-
GERS AND PLUNGERS**

ROLLMEX

MATERIAL:

(4) Reinforced polyamide scallop knob. Fixed.

INSERTS:**VERSIONS W804 AND W805:**

- (3) Zinc plated steel spring.
- (2) Threaded steel body with wrench slot.
- (1) Hardened high resistance steel plunger pin.
- (5) Threaded steel lock nut (UNI 5589).

VERSIONS W804CIN AND W805CIN:

- (3) Stainless steel spring.
- (2) Threaded stainless steel body with wrench slot (AISI 303).
- (1) Stainless steel plunger pin (AISI 303).
- (5) Threaded stainless steel lock nut (UNI 5589) (AISI 304).

The knob-style indexing plunger can be screwed into place by hand. On request, to facilitate assembly, a special zinc plated locking wrench be supplied.

ATTENTION: The manufacturer recommends making the hole for the plunger pin with a tolerance of H7.

SURFACES:

(4) Black satin finish (RAL 9011).

VERSIONS W804 AND W805:

(1,2,5) Black-oxide finish.


VERSIONS W804CIN AND W805CIN:

(1,2,5) Natural.


Packs containing 10 pieces.

SPECIAL REQUESTS:


- On request and for special quantities the knob is available in a choice of colours as indicated in the table on page 19.
- On request a locking wrench can be supplied.

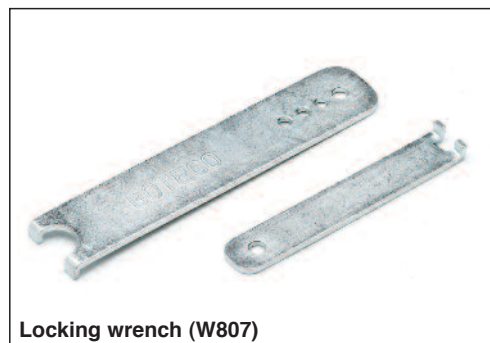

Locking wrench (W807)

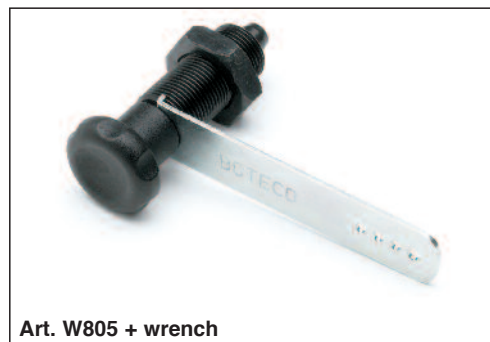

Art. W805 + wrench

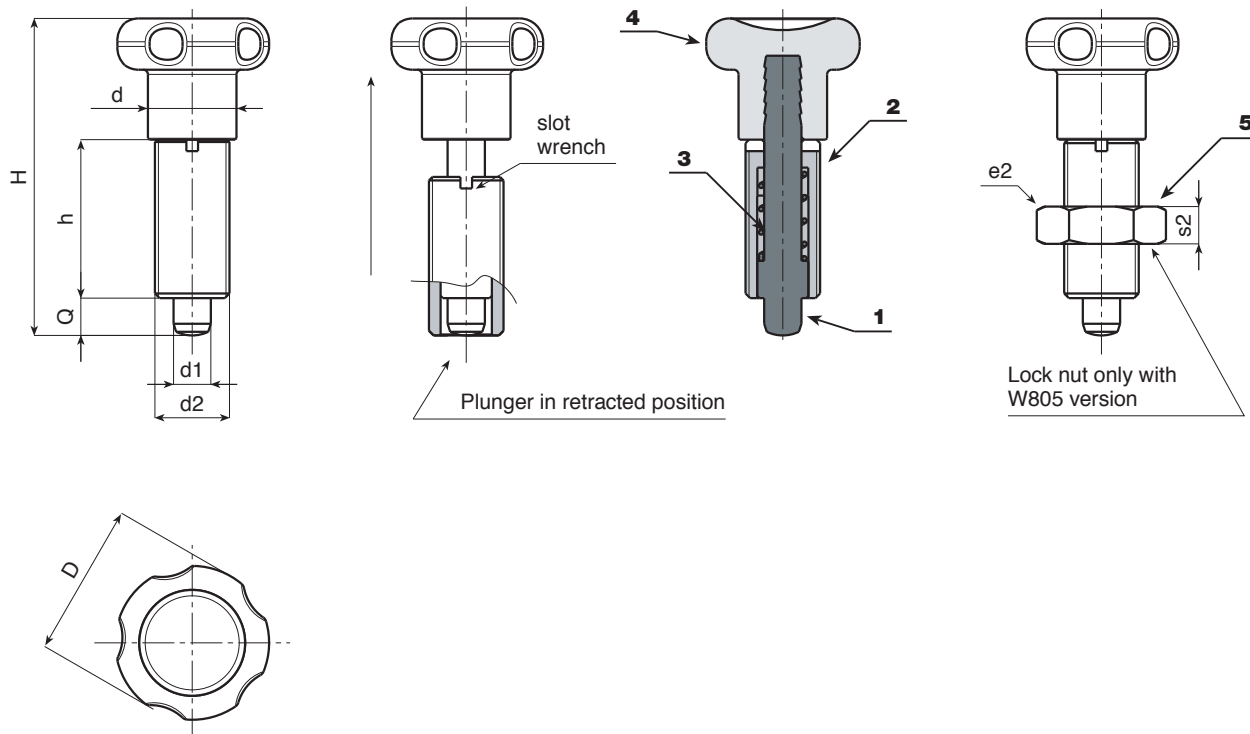



WWW.ROLLMEX.FI

ROLLMEX Oy

Takojankatu 4 - 33540 TAMPERE
Push. 010-6661122 - Fax 03-3640072
tampere@rollmex.fi

Karjalankatu 21 - 15140 LAHTI
Push. 010-6661121 - Fax 03-7511026
lahti@rollmex.fi

AUTHORISED RESELLER