

**FAMILY - A
INDEXED AND FIXED
CLAMPING LEVERS**



 **ROLLMEX**

A580



"EUROMODEL" INDEXED CLAMPING LEVER WITH THREADED FEMALE INSERT

Material:

Special high resistance glass fiber reinforced technopolymer. Oils and greases resistant.

Surface:

Satin.

Lever body and insert colour:

Black (RAL 9011).

Main insert:

Zinc plated steel insert with threaded blind bore.
(Thread tolerance 6H).

Fixing screw:

Black-oxide treated steel screw with hexagon socket head.

(*) Black-oxide treated steel screw with slotted head.

Spring:

Stainless steel spring (AISI 302).

Alternative colours for lever body:

Orange (RAL 2004 cod. 02)

Blue (RAL 5015 cod. 07)

Yellow (RAL 1021 cod. 10)


Red (RAL 3000 cod. 16)

Green (RAL 6024 cod. 17)

Grey (RAL 7035 cod. 13)

SPECIAL REQUESTS:

- It's possible to supply the inserts with different materials, on request and for quantities.
- It's possible to supply the lever body with colours as shown in the table at page A-31 on request and for quantities.

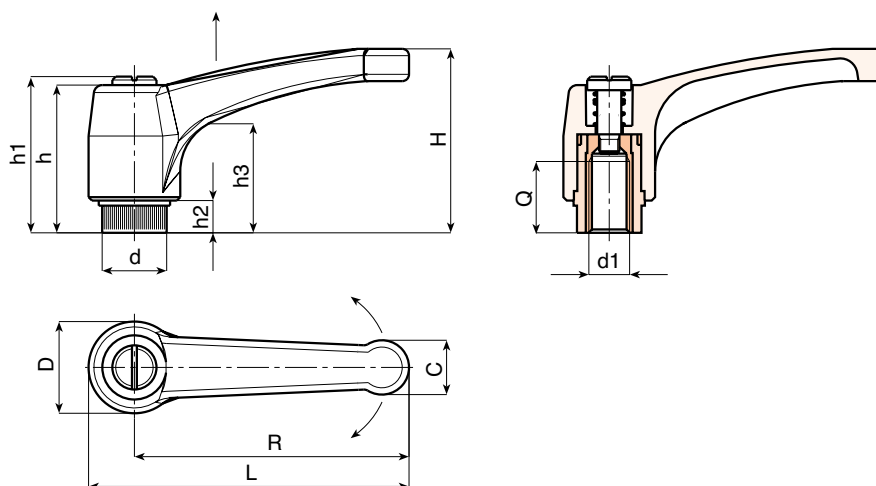

	Art.	L	R	H	D	d	c	h	h1	h2	h3	d1 6H	Q	g
●	A580043.TM0401	51	43	33	17	11,5	9	29	32	6	18	M04	8	15
●	A580043.TM0501	51	43	33	17	11,5	9	29	32	6	18	M05	10	15
●	A580043.TM0601	51	43	33	17	11,5	9	29	32	6	18	M06	10	14
●	* A580052.TM0601	63	52	41	22	15	12	36	40	8	23	M06	14	31
●	* A580052.TM0801	63	52	41	22	15	12	36	40	8	23	M08	14	30
●	* A580052.TM1001	63	52	41	22	15	12	36	40	8	23	M10	14	30
●	A580065.TM0601	76	65	43	23	15	13	36	40	8	24	M06	14	36
●	A580065.TM0801	76	65	43	23	15	13	36	40	8	24	M08	14	35
●	A580065.TM1001	76	65	43	23	15	13	36	40	8	24	M10	14	35
●	A580080.TM0801	93	80	54	27	19	15,5	44	48	8,5	29	M08	19	55
●	A580080.TM1001	93	80	54	27	19	15,5	44	48	8,5	29	M10	19	54
●	A580080.TM1201	93	80	54	27	19	15,5	44	48	8,5	29	M12	19	54
●	* A580094.TM0801	109	94	56	30	19	18	45	49	9	30	M08	19	80
●	* A580094.TM1001	109	94	56	30	19	18	45	49	9	30	M10	19	81
●	* A580094.TM1201	109	94	56	30	19	18	45	49	9	30	M12	19	83
●	A580108.TM1201	125	108	64	34	24	21	51	55	10	35	M12	22	144
●	A580108.TM1401	125	108	64	34	24	21	51	55	10	35	M14	21	146
●	A580108.TM1601	125	108	64	34	24	21	51	55	10	35	M16	23	149

Availability of stock in %

||||| 90% (●) 40% (●) 5% (●)

ROLLMEX

"EUROMODEL" INDEXED CLAMPING LEVER WITH PLASTIC PUSH BUTTON AND WITH THREADED INSERT

A582



Material:

Special high resistance glass fiber reinforced technopolymer. Oils and greases resistant.

Surface:

Satin.

Lever body and insert colour:

Black (RAL 9011).

Main insert:

Brass insert with threaded blind bore.
(Thread tolerance 6H).

Push Button:

Push button in black polyamide (RAL 9011).

Spring:

Stainless steel spring (AISI 302).

Alternative colours for lever body and button:

Orange (RAL 2004 cod. 02)

Blue (RAL 5015 cod. 07)

Yellow (RAL 1021 cod. 10)


Red (RAL 3000 cod. 16)

Green (RAL 6024 cod. 17)

Grey (RAL 7035 cod. 13)

SPECIAL REQUESTS:

- It's possible to supply the inserts with different materials, on request and for quantities.
- It's possible to supply the lever body and button with colours as shown in the table at page A-31 on request and for quantities.

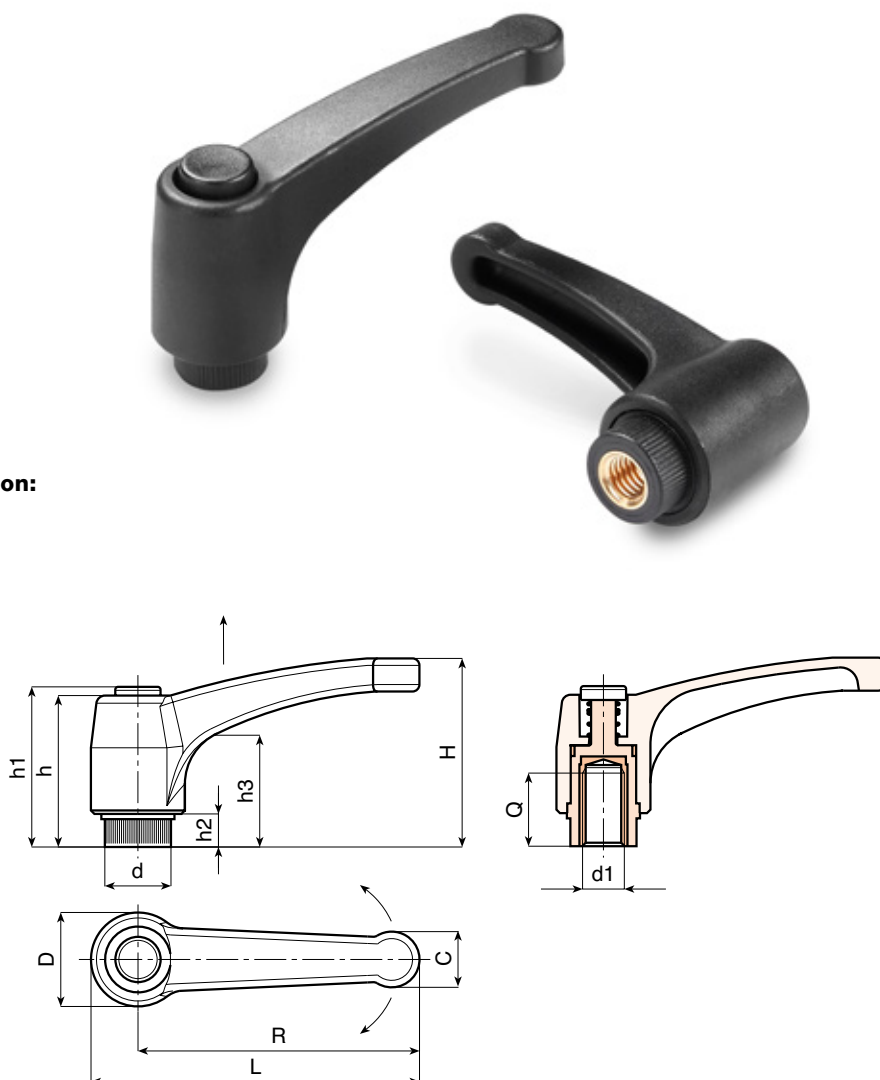

	Art.	L	R	H	D	d	c	h	h1	h2	h3	d1 6H	Q	g
●	A582043.TM0401	51	43	33	17	11,5	9	29	32	6	18	M04	8	15
●	A582043.TM0501	51	43	33	17	11,5	9	29	32	6	18	M05	10	15
●	A582043.TM0601	51	43	33	17	11,5	9	29	32	6	18	M06	10	14
●	A582052.TM0601	63	52	41	22	15	12	36	40	8	23	M06	14	31
●	A582052.TM0801	63	52	41	22	15	12	36	40	8	23	M08	14	30
●	A582052.TM1001	63	52	41	22	15	12	36	40	8	23	M10	14	30
●	A582065.TM0601	76	65	43	23	15	13	36	40	8	24	M06	14	36
●	A582065.TM0801	76	65	43	23	15	13	36	40	8	24	M08	14	35
●	A582065.TM1001	76	65	43	23	15	13	36	40	8	24	M10	14	35
●	A582080.TM0801	93	80	54	27	19	15,5	44	48	8,5	29	M08	19	55
●	A582080.TM1001	93	80	54	27	19	15,5	44	48	8,5	29	M10	19	54
●	A582080.TM1201	93	80	54	27	19	15,5	44	48	8,5	29	M12	19	54
●	A582094.TM0801	109	94	56	30	19	18	45	49	9	30	M08	19	80
●	A582094.TM1001	109	94	56	30	19	18	45	49	9	30	M10	19	81
●	A582094.TM1201	109	94	56	30	19	18	45	49	9	30	M12	19	83
●	A582108.TM1201	125	108	64	34	24	21	51	55	10	35	M12	22	144
●	A582108.TM1401	125	108	64	34	24	21	51	55	10	35	M14	21	146
●	A582108.TM1601	125	108	64	34	24	21	51	55	10	35	M16	23	149

Availability of stock in %

(■) 90% (●) 40% (●) 5% (●)

ROLLMEX

A581



"EUROMODEL" INDEXED CLAMPING LEVER WITH THREADED MALE INSERT

Material:

Special high resistance glass fiber reinforced technopolymer. Oils and greases resistant.

Surface:

Satin.

Lever body and insert colour:

Black (RAL 9011).

Main insert:

Zinc plated steel threaded stud.
(Thread tolerance 6g).

Fixing screw:

Black-oxide treated steel screw with hexagon socket head.

(R52-R94) Black-oxide treated steel screw with slotted head.

Spring:


Stainless steel spring (AISI 302).

Alternative colours for lever body:

Orange (RAL 2004 cod. 02)
Blue (RAL 5015 cod. 07)
Yellow (RAL 1021 cod. 10)
Red (RAL 3000 cod. 16)
Green (RAL 6024 cod. 17)
Grey (RAL 7035 cod. 13)

SPECIAL REQUESTS:

- It's possible to supply the inserts with different lengths, on request and for quantities.
- It's possible to supply the inserts with different materials, on request and for quantities.
- It's possible to supply the lever body with colours as shown in the table at page A-31 on request and for quantities.

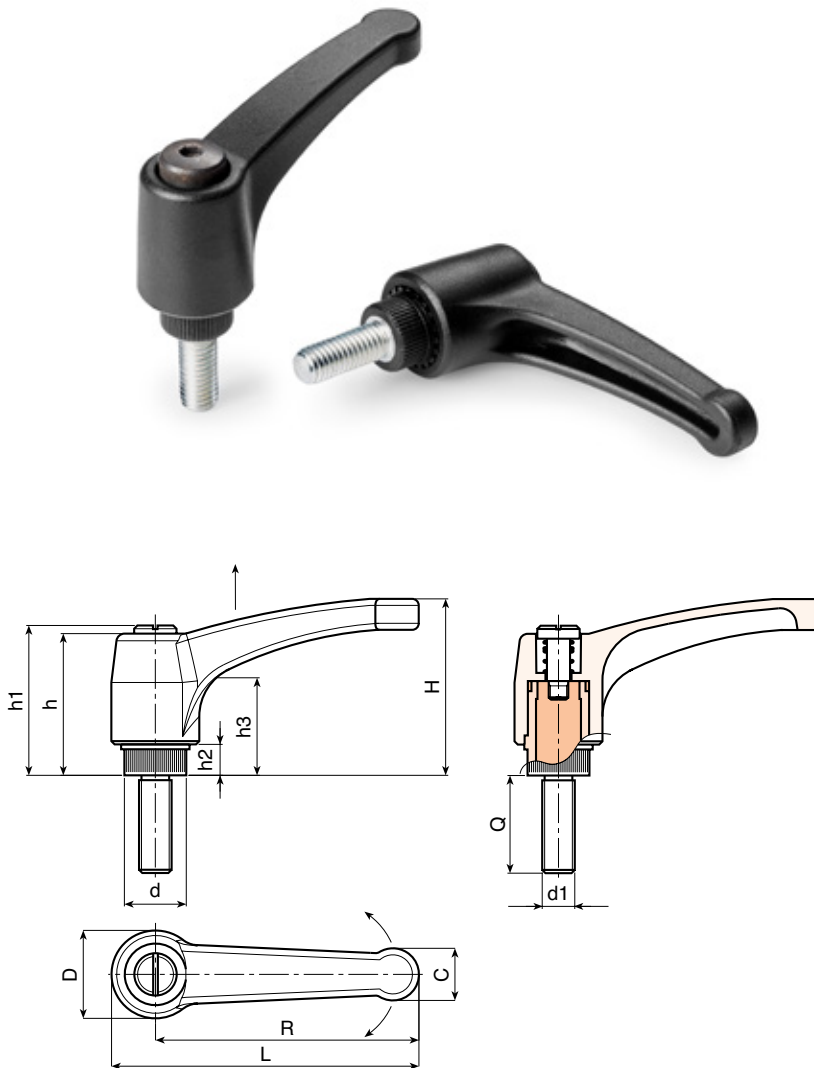

Art.	L	R	H	D	d	c	h	h1	h2	h3	LM	d1 6g	Q	g
A581043.TM04X..01	51	43	33	17	11,5	9	29	32	6	18	60	M04	10-16-20-25-30-40	18-19-19-20-21-21,5
A581043.TM05X..01	51	43	33	17	11,5	9	29	32	6	18	60	M05	10-16-20-25-30-40	20-20-21-22-22-23
A581043.TM06X..01	51	43	33	17	11,5	9	29	32	6	18	60	M06	10-16-20-25-30-40-50	19-21-22-23-24-25-26
A581052.TM06X..01	63	52	41	22	15	12	36	40	8	23	60	M06	16-20-25-30-35-40-50	38-38-39-40-41-42-43
A581052.TM08X..01	63	52	41	22	15	12	36	40	8	23	60	M08	16-20-25-30-35-40-45-50	38-40-42-43-45-46-47-49
A581065.TM06X..01	76	65	43	23	15	13	36	40	8	24	60	M06	16-20-25-30-35-40-45-50	40-40-41-42-43-44-44-46
A581065.TM08X..01	76	65	43	23	15	13	36	40	8	24	60	M08	16-20-25-30-35-40-45-50	42-44-46-47-49-50-52-54
A581080.TM08X..01	93	80	54	27	19	15,5	44	48	8,5	29	90	M08	20-25-30-35-40-45-50	66-67-69-70,5-72-74-76
A581080.TM10X..01	93	80	54	27	19	15,5	44	48	8,5	29	90	M10	20-25-30-35-40-45-50	74-76,5-79-81,5-84-87
A581080.TM12X..01	93	80	54	27	19	15,5	44	48	8,5	29	90	M12	20-25-30-35-40-50	89-92-95-99-101-108
A581094.TM08X..01	109	94	56	30	19	18	45	49	9	30	90	M08	20-25-30-35-40-50	73-74-76-78-79-81
A581094.TM10X..01	109	94	56	30	19	18	45	49	9	30	90	M10	20-25-30-35-40-50-60-70	79-80-81-84-86-88-91-94-97
A581094.TM12X..01	109	94	56	30	19	18	45	49	9	30	90	M12	0-25-30-35-40-50-60-70	96-97-99-102-106-108-115-123-130
A581108.TM12X..01	125	108	64	34	24	21	51	55	10	35	90	M12	20-30-40-50-60-70	137-144-151-158-165-172
A581108.TM14X..01	125	108	64	34	24	21	51	55	10	35	90	M14	30-40-50-60	150-157-164-171
A581108.TM16X..01	125	108	64	34	24	21	51	55	10	35	90	M16	40-50-60	175-187-199

Enter the stud length choice in the two .. of the article code. Lengths by request with 100 pieces minimum quantity.

LM = Maximum mouldable length.

Availability of stock in %

||||| ROLLMEX ||||| () 90% () 40% () 5% ()

"EUROMODEL" INDEXED CLAMPING LEVER WITH PLASTIC PUSH BUTTON AND WITH THREADED STUD

A583



Material:

Special high resistance glass fiber reinforced technopolymer. Oils and greases resistant.

Surface:

Satin.

Lever body and insert colour:

Black (RAL 9011).

Main insert:

Zinc plated steel threaded stud.
(Thread tolerance 6g).

Push Button:

Push button in black polyamide (RAL 9011).

Spring:


Stainless steel spring (AISI 302).

Alternative colours for lever body and button:

Orange	(RAL 2004 cod. 02)
Blue	(RAL 5015 cod. 07)
Yellow	(RAL 1021 cod. 10)
Red	(RAL 3000 cod. 16)
Green	(RAL 6024 cod. 17)
Grey	(RAL 7035 cod. 13)

SPECIAL REQUESTS:

- It's possible to supply the inserts with different lengths, on request and for quantities.
- It's possible to supply the inserts with different materials, on request and for quantities.
- It's possible to supply the lever body and button with colours as shown in the table at page A-31 on request and for quantities.

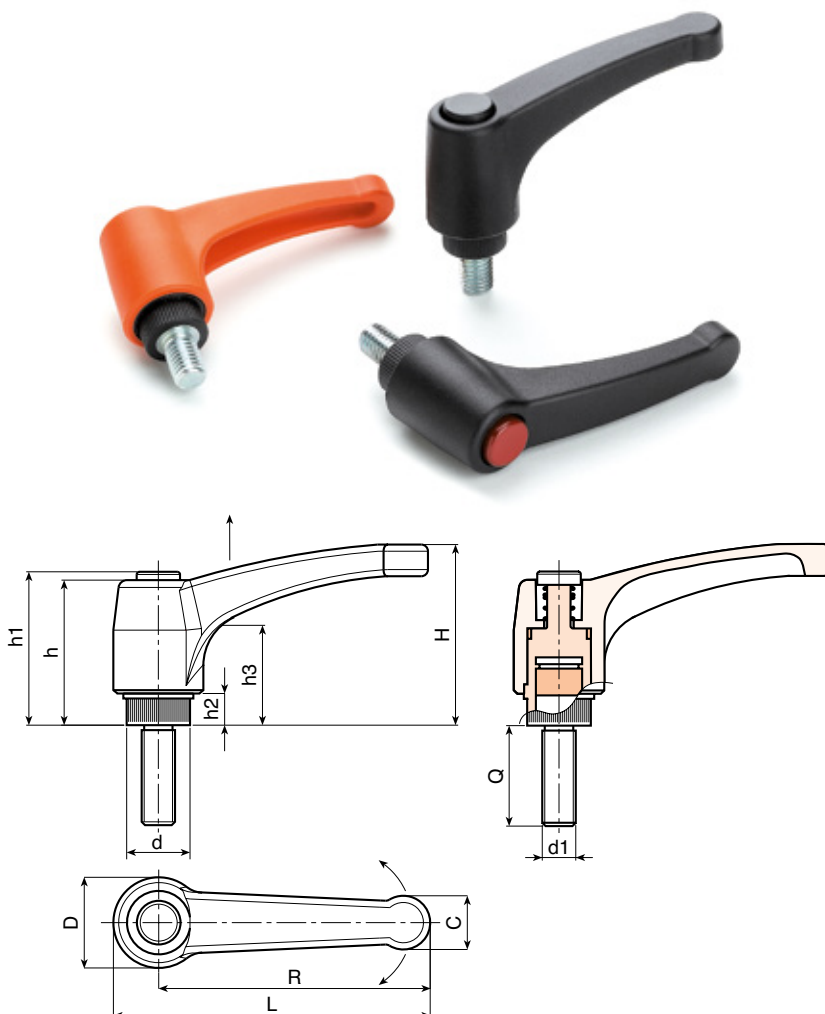

Art.	L	R	H	D	d	c	h	h1	h2	h3	LM	d1 6g	Q	g
A583043.TM04X..01	51	43	33	17	11,5	9	29	32	6	18	75	M04	10-16-20-25-30-40	9-10-10-11-11-12
A583043.TM05X..01	51	43	33	17	11,5	9	29	32	6	18	75	M05	10-16-20-25-30-40	12-13-13-14-15-16
A583043.TM06X..01	51	43	33	17	11,5	9	29	32	6	18	75	M06	10-16-20-25-30-40-50	14-15-15,5-16-16,5-18-19,5
A583052.TM06X..01	63	52	41	22	15	12	36	40	8	23	90	M06	16-20-25-30-35-40-50	22-23-24-25-26-27-28
A583052.TM08X..01	63	52	41	22	15	12	36	40	8	23	90	M08	16-20-25-30 35-40-45-50	24-25-27-28,5 30-31,5-33-34,5
A583052.TM10X..01	63	52	41	22	15	12	36	40	8	23	90	M10	20-25-30-35-40-50	31-33,5-36-38,5-41-46
A583065.TM06X..01	76	65	43	23	15	13	36	40	8	24	90	M06	16-20-25-30-35-40-45-50	26-27-27-28-28-29-30
A583065.TM08X..01	76	65	43	23	15	13	36	40	8	24	90	M08	16-20-25-30 35-40-45-50	31,5-33-34,5-36-37,5 39-41-42,5-44
A583065.TM10X..01	76	65	43	23	15	13	36	40	8	24	90	M10	20-25-30-35-40-45-50	37-39,5-42-44,5-47-49,5-52
A583080.TM08X..01	93	80	54	27	19	15,5	44	48	8,5	29	90	M08	20-25-30-35-40-50	47-49-50,5-52-54-57
A583080.TM10X..01	93	80	54	27	19	15,5	44	48	8,5	29	90	M10	20-25-30-35 40-45-50	54-56,5-59-61,5-64 66,5-69-74-79
A583080.TM12X..01	93	80	54	27	19	15,5	44	48	8,5	29	90	M12	20-25-30-35 40-50-60-70	65-69-72-75-79-83 86-93-100-107
A583094.TM08X..01	109	94	56	30	19	18	45	49	9	30	90	M08	20-25-30-35-40-50	55-57-58-60-62-65
A583094.TM10X..01	109	94	56	30	19	18	45	49	9	30	90	M10	20-25-30-35 40-50-60-70	62-67-69-72 75-77-82-87
A583094.TM12X..01	109	94	56	30	19	18	45	49	9	30	90	M12	20-25-30-35-40 50-60-70	73-80-83-87-91-94 101-108-115
A583108.TM12X..01	125	108	64	34	24	21	51	55	10	35	100	M12	20-30-40-50-60-70	101-108-115-122-129-136
A583108.TM14X..01	125	108	64	34	24	21	51	55	10	35	100	M14	30-40-50-60	114-121-128-134
A583108.TM16X..01	125	108	64	34	24	21	51	55	10	35	100	M16	40-50-60	139-151-163

Enter the stud length choice in the two .. of the article code. Lengths by request with 50 pieces minimum quantity.

LM = Maximum mouldable length.

Availability of stock in %

(■) 90%(●) 40%(●) 5%(●)

ROLLMEX

A582 CIN



"EUROMODEL" INDEXED CLAMPING LEVER WITH PLASTIC PUSH BUTTON AND STAINLESS STEEL THREADED INSERT

INOX

Material:

Special high resistance glass fiber reinforced technopolymer. Oils and greases resistant.

Surface:

Satin.

Lever body and insert colour:

Black (RAL 9011).

Main insert:

Stainless steel insert with threaded blind bore. (Aisi 303) (Thread tolerance 6H).

Push Button:

Push button in black polyamide (RAL 9011).

Spring:


Stainless steel spring (AISI 302).

Alternative colours for lever body and button:

Orange (RAL 2004 cod. 02)
Blue (RAL 5015 cod. 07)
Yellow (RAL 1021 cod. 10)
Red (RAL 3000 cod. 16)
Green (RAL 6024 cod. 17)
Grey (RAL 7035 cod. 13)

SPECIAL REQUESTS:

- It's possible to supply the lever body an button with colours as shown in the table at page A-31 on request and for quantities.

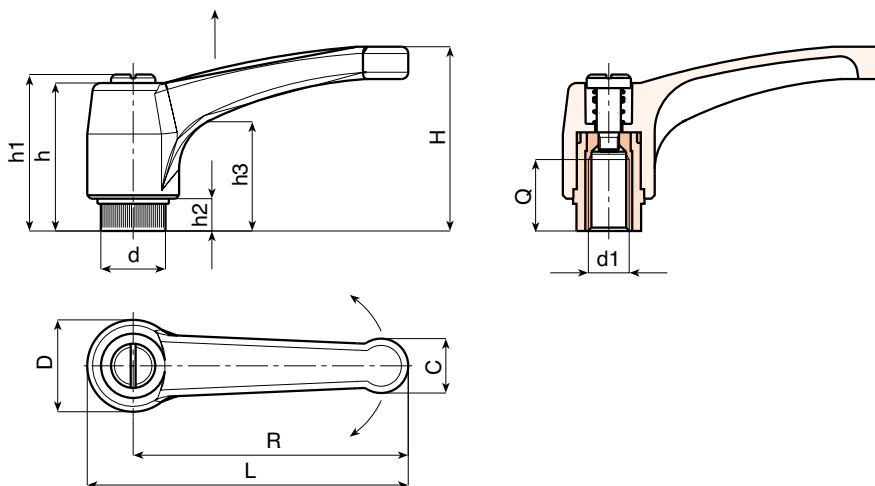

Art.	L	R	H	D	d	c	h	h1	h2	h3	d1 6H	Q	g
A582043.TM0401CIN	51	43	33	17	11,5	9	29	32	6	18	M04	8	15
A582043.TM0501CIN	51	43	33	17	11,5	9	29	32	6	18	M05	10	15
A582043.TM0601CIN	51	43	33	17	11,5	9	29	32	6	18	M06	10	14
A582052.TM0601CIN	63	52	41	22	15	12	36	40	8	23	M06	14	31
A582052.TM0801CIN	63	52	41	22	15	12	36	40	8	23	M08	14	30
A582052.TM1001CIN	63	52	41	22	15	12	36	40	8	23	M10	14	30
A582065.TM0601CIN	76	65	43	23	15	13	36	40	8	24	M06	14	36
A582065.TM0801CIN	76	65	43	23	15	13	36	40	8	24	M08	14	35
A582065.TM1001CIN	76	65	43	23	15	13	36	40	8	24	M10	14	35
A582080.TM0801CIN	93	80	54	27	19	15,5	44	48	8,5	29	M08	19	55
A582080.TM1001CIN	93	80	54	27	19	15,5	44	48	8,5	29	M10	19	54
A582080.TM1201CIN	93	80	54	27	19	15,5	44	48	8,5	29	M12	19	54
A582094.TM0801CIN	109	94	56	30	19	18	45	49	9	30	M08	19	80
A582094.TM1001CIN	109	94	56	30	19	18	45	49	9	30	M10	19	81
A582094.TM1201CIN	109	94	56	30	19	18	45	49	9	30	M12	19	83
A582108.TM1201CIN	125	108	64	34	24	21	51	55	10	35	M12	22	144
A582108.TM1401CIN	125	108	64	34	24	21	51	55	10	35	M14	21	146
A582108.TM1601CIN	125	108	64	34	24	21	51	55	10	35	M16	23	149

Availability of stock in %

() 90% (●) 40% (●) 5% (●)

ROLLMEX

"EUROMODEL" INDEXED CLAMPING LEVER WITH PLASTIC PUSH BUTTON AND STAINLESS STEEL STUD

A583 CIN



Material:

Special high resistance glass fiber reinforced technopolymer. Oils and greases resistant.

Surface:

Satin.

Lever body and insert colour:

Black (RAL 9011).

Main insert:

Stainless steel threaded stud (AISI 304).
(Thread tolerance 6g).

Push Button:

Push button in black polyamide (RAL 9011).

Spring:


Stainless steel spring (AISI 302).

Alternative colours for lever body and button:

Orange (RAL 2004 cod. 02)
Blue (RAL 5015 cod. 07)
Yellow (RAL 1021 cod. 10)
Red (RAL 3000 cod. 16)
Green (RAL 6024 cod. 17)
Grey (RAL 7035 cod. 13)

SPECIAL REQUESTS:

- It's possible to supply the inserts with different lengths, lengths on request and for quantities.
- It's possible to supply the lever body and button with colours as shown in the table at page A-31 on request and for quantities.

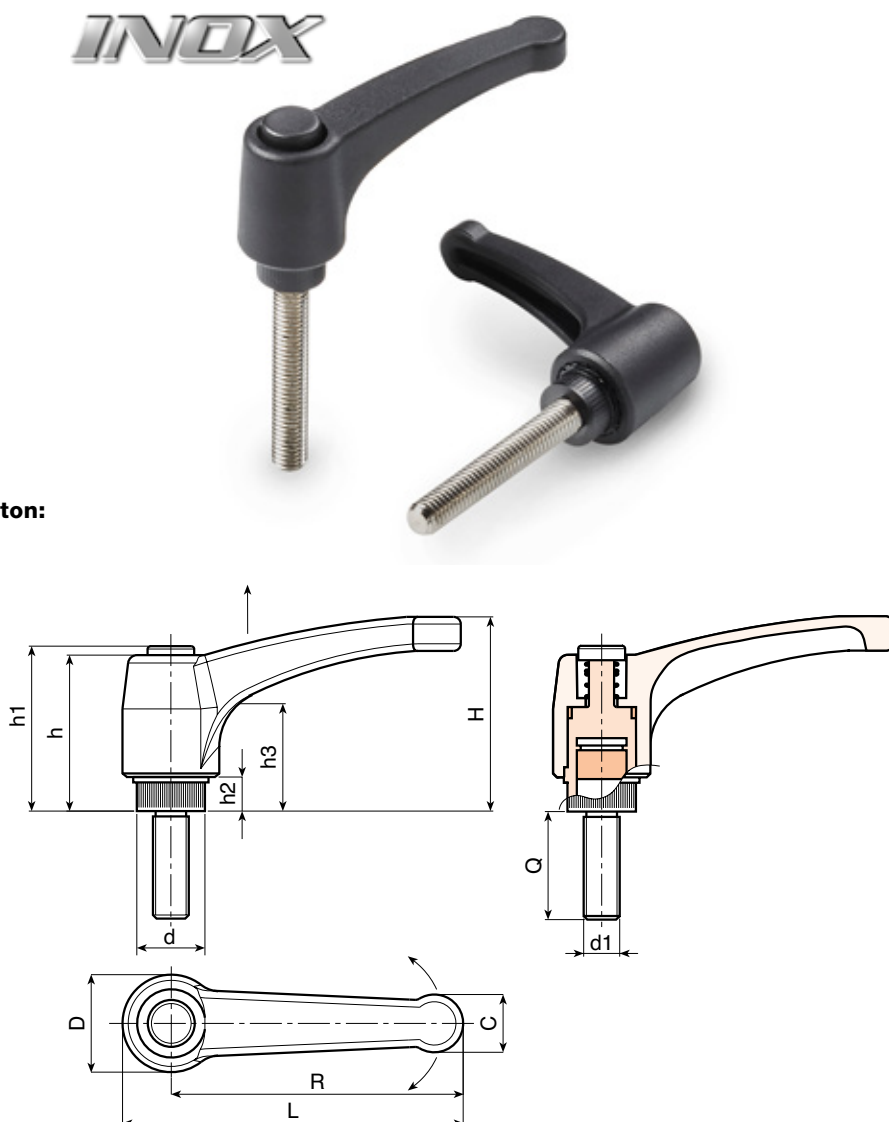

Art.	L	R	H	D	d	c	h	h1	h2	h3	LM	d1	6g	Q	g
A583043.TM04X..01CIN	51	43	33	17	11,5	9	29	32	6	18	75	M04		16-20-30	12-13-14
A583043.TM05X..01CIN	51	43	33	17	11,5	9	29	32	6	18	75	M05		16-20-30	13-14-15
A583043.TM06X..01CIN	51	43	33	17	11,5	9	29	32	6	18	75	M06		16-20-30-40	17-18-20-22
A583052.TM06X..01CIN	63	52	41	22	15	12	36	40	8	23	90	M06		16-20-30-40	25-26-28-30
A583052.TM08X..01CIN	63	52	41	22	15	12	36	40	8	23	90	M08		16-20-30-40	27-28-31-33
A583052.TM10X..01CIN	63	52	41	22	15	12	36	40	8	23	90	M10		16-20-30-40	33-35-40-45
A583065.TM06X..01CIN	76	65	43	23	15	13	36	40	8	24	90	M06		16-20-30-40	28-29-31-32,5
A583065.TM08X..01CIN	76	65	43	23	15	13	36	40	8	24	90	M08		16-20-30-40	33-35-38-41
A583065.TM10X..01CIN	76	65	43	23	15	13	36	40	8	24	90	M10		16-20-30-40	39-41-46-51
A583080.TM08X..01CIN	93	80	54	27	19	15,5	44	48	8,5	29	90	M08		16-20-30-40-50	46-49-51-54-57
A583080.TM10X..01CIN	93	80	54	27	19	15,5	44	48	8,5	29	90	M10		20-30-40-50	56-61-66-71
A583080.TM12X..01CIN	93	80	54	27	19	15,5	44	48	8,5	29	90	M12		20-30-40-50	68-75-82-89
A583094.TM08X..01CIN	109	94	56	30	19	18	45	49	9	30	90	M08		20-30-40-50	52-55-58-61
A583094.TM10X..01CIN	109	94	56	30	19	18	45	49	9	30	90	M10		20-30-40-50	63-68-73-78
A583094.TM12X..01CIN	109	94	56	30	19	18	45	49	9	30	90	M12		20-30-40-50	75-82-89-96
A583108.TM12X..01CIN	125	108	64	34	24	21	51	55	10	35	100	M12		20-30-40-50	103-110-117-124
A583108.TM14X..01CIN	125	108	64	34	24	21	51	55	10	35	100	M14		20-30-40-50	109-116-123-136
A583108.TM16X..01CIN	125	108	64	34	24	21	51	55	10	35	100	M16		20-30-40-50	127-139-151-163

Enter the stud length choice in the two .. of the article code. Lengths by request with 50 pieces minimum quantity.

LM = Maximum mouldable length.

Availability of stock in %

() 90% () 40% () 5% ()



CLAMPING LEVER WITH FEMALE THREADED INSERT

Material:

Special high resistance glass fiber reinforced technopolymer. Oils and greases resistant.

Surface:

Satin.

Lever body and insert colour:

Black (RAL 9011).

Main insert:

Zinc plated steel insert with threaded blind bore.
(Thread tolerance 6H).

Fixing screw:


Black-oxide treated steel screw with slotted head.

Spring:

Stainless steel spring (AISI 302).

SPECIAL REQUESTS:

- It's possible to supply the inserts with different materials, on request and for quantities.
- It's possible to supply the lever body with colours as shown in the table at page A-31 on request and for quantities.

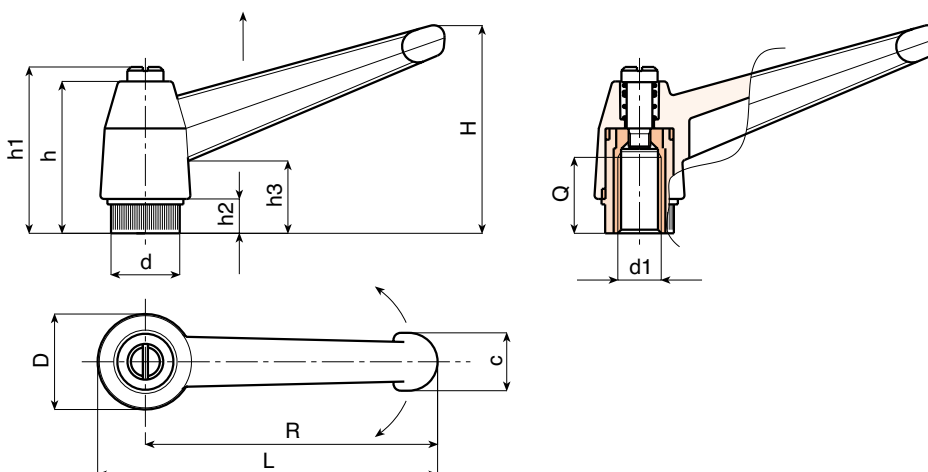

	Art.	L	R	H	D	d	c	h	h1	h2	h3	d1 6H	Q	g
●	A522043.TM0401	52	43	33	17	11,5	11	27	30	6	14	M04	10	14
●	A522043.TM0501	52	43	33	17	11,5	11	27	30	6	14	M05	9	14
●	A522043.TM0601	52	43	33	17	11,5	11	27	30	6	14	M06	9	14
●	A522065.TM0601	77	65	45	23	15	13	34	38	8	17	M06	15	28
●	A522065.TM0801	77	65	45	23	15	13	34	38	8	17	M08	15	26
●	A522065.TM1001	77	65	45	23	15	13	34	38	8	17	M10	13	28
●	A522083.TM0801	97	83	57	27	19	16	43	47	10	23	M08	17	52
●	A522083.TM1001	97	83	57	27	19	16	43	47	10	23	M10	17	48
●	A522083.TM1201	97	83	57	27	19	16	43	47	10	23	M12	16	48
●	A522104.TM1001	121	104	70	33	24	19	50	53	11	26	M10	20	114
●	A522104.TM1201	121	104	70	33	24	19	50	53	11	26	M12	22	106
●	A522104.TM1401	121	104	70	33	24	19	50	53	11	26	M14	21	100
●	A522104.TM1601	121	104	70	33	24	19	50	53	11	26	M16	23	100

CLAMPING LEVER WITH MALE THREADED STUD

A523



Material:

Special high resistance glass fiber reinforced technopolymer.
Oils and greases resistant.

Surface:

Satin.

Lever body and insert colour:

Black (RAL 9011).

Main insert:

Zinc plated steel threaded stud.
(Thread tolerance 6g).

Fixing screw:

Black-oxide treated steel screw with slotted head.


Spring:

Stainless steel spring (AISI 302).



SPECIAL REQUESTS:

- It's possible to supply the inserts with different lengths, on request and for quantities.
- It's possible to supply the inserts with different materials, on request and for quantities.
- It's possible to supply the lever body with colours as shown in the table at page A-31, on request and for quantities.

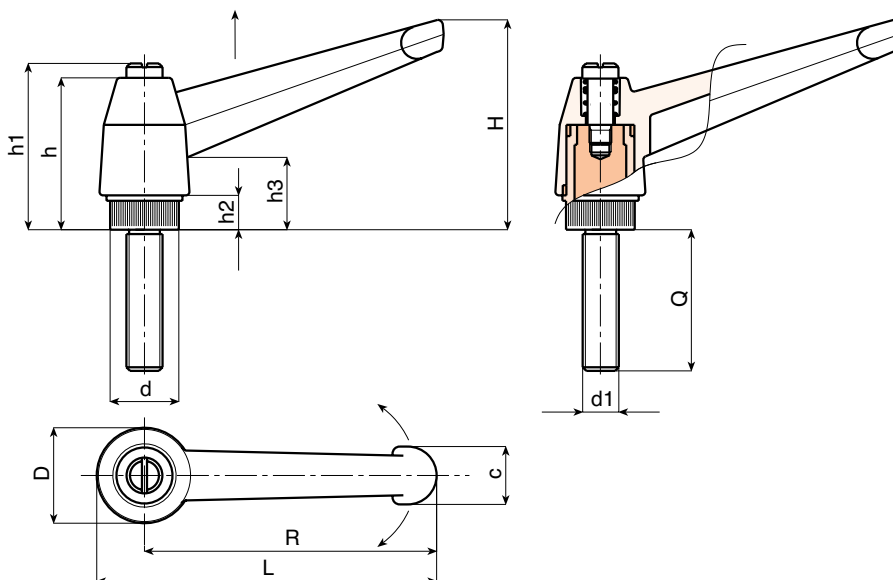

Art.	L	R	H	D	d	c	h	h1	h2	h3	LM	d1	eg	Q	g
A523043.TM04X..01	52	43	33	17	11,5	11	27	30	6	14	60	M04		10-16-20-25-30-40	16-16-17-18-18-19
A523043.TM05X..01	52	43	33	17	11,5	11	27	30	6	14	60	M05		10-16-20-25-30-40	16-17-17-17-18-19
A523043.TM06X..01	52	43	33	17	11,5	11	27	30	6	14	60	M06		10-16-20-25-30-40	18-18-19-20-20-21
A523065.TM06X..01	77	65	45	23	15	13	34	38	8	17	60	M06		16-20-25-30-40	33-34-35-37
A523065.TM08X..01	77	65	45	23	15	13	34	38	8	17	60	M08		16-20-25-30-35 40-45-50	35-37-38-40-42 43-44-46
A523083.TM08X..01	97	83	57	27	19	16	43	47	10	23	90	M08		20-25-30-35 40-50-60	58-59-61-62 64-67-70
A523083.TM10X..01	97	83	57	27	19	16	43	47	10	23	90	M10		20-25-30-35 40-50-60	67-70-72-74 77-82-87
A523083.TM12X..01	97	83	57	27	19	16	43	47	10	23	90	M12		20-25-30-35 40-50-60	79-82-86-89 93-100-107
A523104.TM10X..01	121	104	70	33	24	19	50	53	11	26	90	M10		20-30-40-50-60	109-114-119-124-129
A523104.TM12X..01	121	104	70	33	24	19	50	53	11	26	90	M12		20-30-40-50-60	115-122-129-136-143
A523104.TM14X..01	121	104	70	33	24	19	50	53	11	26	90	M14		30-40-50-60-70	140-150-160-170-180
A523104.TM16X..01	121	104	70	33	24	19	50	53	11	26	90	M16		30-40-50-60-70	156-170-184-198-212

Enter the stud length choice in the two .. of the article code. Lengths by request with 100 pieces minimum quantity.

LM = Maximum mouldable length.

Presumable presence in the stock in %

() 90% () 40% () 5% ()

ROLLMEX

A562



INDEXED CLAMPING LEVER WITH PLASTIC PUSH BUTTON AND WITH FEMALE THREADED INSERT

Material:

Special high resistance glass fiber reinforced technopolymer. Oils and greases resistant.

Surface:

Satin.

Lever body and insert colour:

Black (RAL 9011).

Main insert:

Brass insert with threaded blind bore.
(Thread tolerance 6H).

Push Button:

Push button in black polyamide (RAL 9011).

Alternative colours for lever body and button:


Orange (RAL 2004 cod. 02)
Blue (RAL 5015 cod. 07)
Yellow (RAL 1021 cod. 10)
Red (RAL 3000 cod. 16)
Green (RAL 6024 cod. 17)
Grey (RAL 7035 cod. 13)

Spring:

Stainless steel spring (AISI 302).

SPECIAL REQUESTS:

- It's possible to supply the inserts with different materials, on request and for quantities.
- It's possible to supply the lever body and button with colours as shown in the table at page A-31 on request and for quantities.

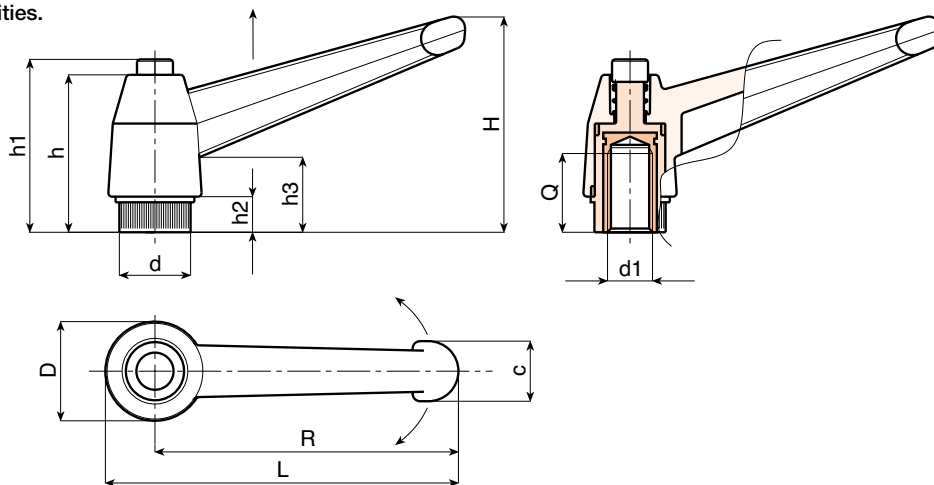

	Art.	L	R	H	D	d	c	h	h1	h2	h3	d1 6H	Q	g
●	A562043.TM0401	52	43	33	17	11,5	11	27	30	6	14	M04	10	14
●	A562043.TM0501	52	43	33	17	11,5	11	27	30	6	14	M05	9	14
●	A562043.TM0601	52	43	33	17	11,5	11	27	30	6	14	M06	9	14
●	A562065.TM0601	77	65	45	23	15	13	34	38	8	17	M06	15	28
●	A562065.TM0801	77	65	45	23	15	13	34	38	8	17	M08	15	26
●	A562065.TM1001	77	65	45	23	15	13	34	38	8	17	M10	13	28
●	A562083.TM0801	97	83	57	27	19	16	43	47	10	23	M08	17	52
●	A562083.TM1001	97	83	57	27	19	16	43	47	10	23	M10	17	48
●	A562083.TM1201	97	83	57	27	19	16	43	47	10	23	M12	16	48
●	A562104.TM1001	121	104	70	33	24	19	50	53	11	26	M10	20	114
●	A562104.TM1201	121	104	70	33	24	19	50	53	11	26	M12	22	106
●	A562104.TM1401	121	104	70	33	24	19	50	53	11	26	M14	21	100
●	A562104.TM1601	121	104	70	33	24	19	50	53	11	26	M16	23	100

INDEXED CLAMPING LEVER WITH PLASTIC PUSH BUTTON AND WITH MALE THREADED STUD

A563



Material:

Special high resistance glass fiber reinforced technopolymer. Oils and greases resistant.

Surface:

Satin.

Lever body and insert colour:

Black (RAL 9011).

Main insert:

Zinc plated steel threaded stud.
(Thread tolerance 6g).

Push Button:

Push button in black polyamide (RAL 9011).

Alternative colours for lever body and button:

Orange (RAL 2004 cod. 02)

Blue (RAL 5015 cod. 07)

Yellow (RAL 1021 cod. 10)

Red (RAL 3000 cod. 16)

Green (RAL 6024 cod. 17)


Grey (RAL 7035 cod. 13)

Spring:

Stainless steel spring (AISI 302).

SPECIAL REQUESTS:

- It's possible to supply the inserts with different lengths, on request and for quantities.
- It's possible to supply the inserts with different materials, on request and for quantities.
- It's possible to supply the lever body and button with colours as shown in the table at page A-31 on request and for quantities.

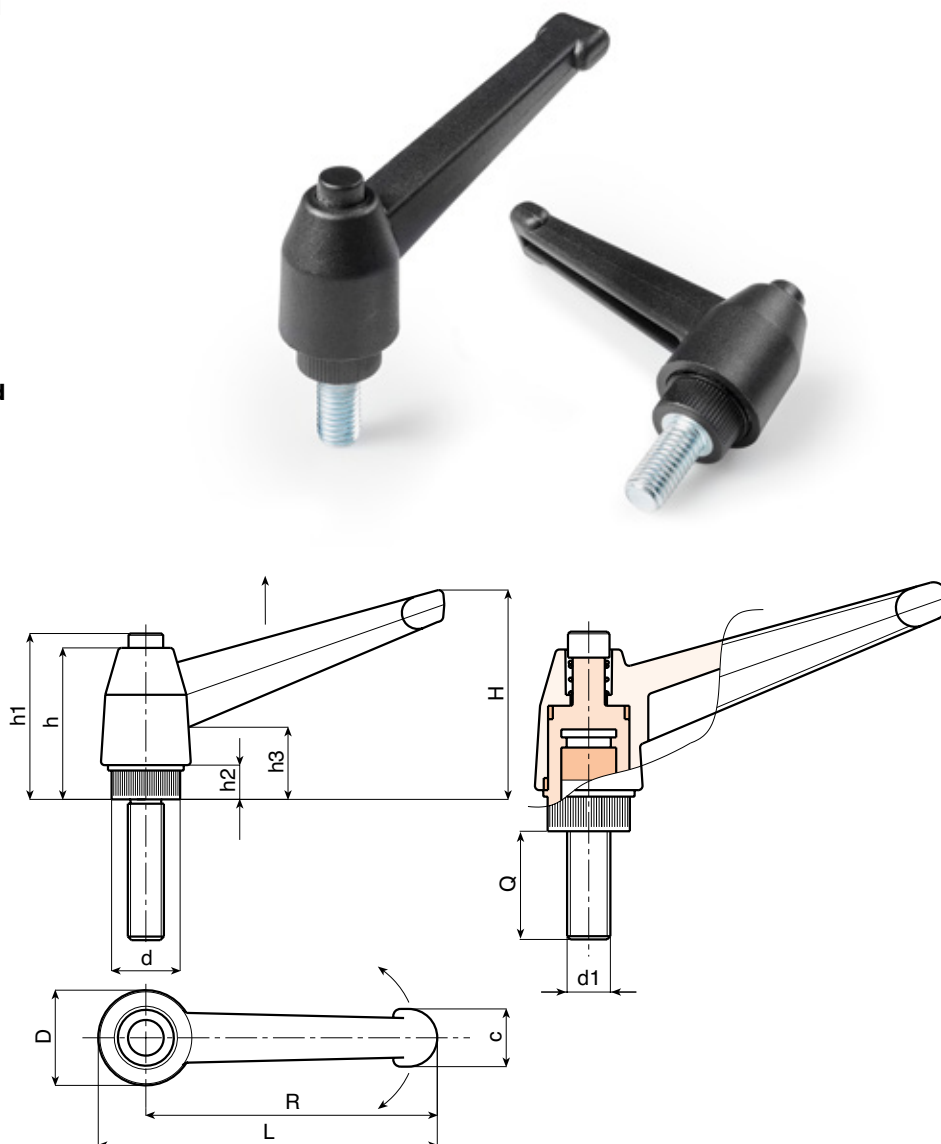

Art.	L	R	H	D	d	c	h	h1	h2	h3	LM	d1	eg	Q	g
A563043.TM04X..01	52	43	33	17	11,5	11	27	30	6	14	75	M04		10-16-20-25-30-40	8-8-9-9-10-11
A563043.TM05X..01	52	43	33	17	11,5	11	27	30	6	14	75	M05		10-16-20-25-30-40	11-12-13-13-14-14
A563043.TM06X..01	52	43	33	17	11,5	11	27	30	6	14	75	M06		10-16-20-25-30-35-40-50	11-12-14-15-16-17-18-20
A563065.TM06X..01	77	65	45	23	15	13	34	38	8	17	90	M06		16-20-25-30-35-40-45-50	22-23-24-25-26-27-28-29
A563065.TM08X..01	77	65	45	23	15	13	34	38	8	17	90	M08		16-20-25-30-35-40-45-50	25-26-27-29-30-32-33-35
A563065.TM10X..01	77	65	45	23	15	13	34	38	8	17	90	M10		20-25-30-35-40-50	31-33-36-39-41-46
A563083.TM08X..01	97	83	57	27	19	16	43	47	10	23	90	M08		20-25-30-35-40-50-60-70	42-44-45-47-48-51-54-57
A563083.TM10X..01	97	83	57	27	19	16	43	47	10	23	90	M10		20-25-30-35-40-45-50-60-70	50-53-55-57-60-63-65-70-75
A563083.TM12X..01	97	83	57	27	19	16	43	47	10	23	90	M12		20-25-30-35-40-50-60-70	62-65-69-72-76-83-90-97
A563104.TM12X..01	121	104	70	33	24	19	50	53	11	26	100	M12		20-25-30-35-40-50-60-70	84-87-91-96-98-105-112-119
A563104.TM14X..01	121	104	70	33	24	19	50	53	11	26	100	M14		20-25-30-35-40-50-60-70	90-95-100-105-110-120-130-140
A563104.TM16X..01	121	104	70	33	24	19	50	53	11	26	100	M16		20-30-40-50-60	108-120-132-146-158

Enter the stud length choice in the two .. of the article code. Lengths by request with 50 pieces minimum quantity.

LM = Maximum mouldable length.

Presumable presence in the stock in %

() 90% () 40% () 5% ()

ROLLMEX

A562 CIN



INDEXED CLAMPING LEVER WITH PLASTIC PUSH BUTTON AND WITH STAINLESS STEEL THREADED INSERT

INOX

Material:

Special high resistance glass fiber reinforced technopolymer. Oils and greases resistant.

Surface:

Satin.

Lever body and insert colour:

Black (RAL 9011).

Main insert:

Stainless steel insert with threaded blind bore. (Aisi 303) (Thread tolerance 6H).

Push Button:

Push button in black polyamide (RAL 9011).

Alternative colours for lever body and button:

Orange (RAL 2004 cod. 02)

Blue (RAL 5015 cod. 07)

Yellow (RAL 1021 cod. 10)

Red (RAL 3000 cod. 16)

Green (RAL 6024 cod. 17)


Grey (RAL 7035 cod. 13)

Spring:

Stainless steel spring (AISI 302).

SPECIAL REQUESTS:

- It's possible to supply the lever body an button with colours as shown in the table at page A-31 on request and for quantities.

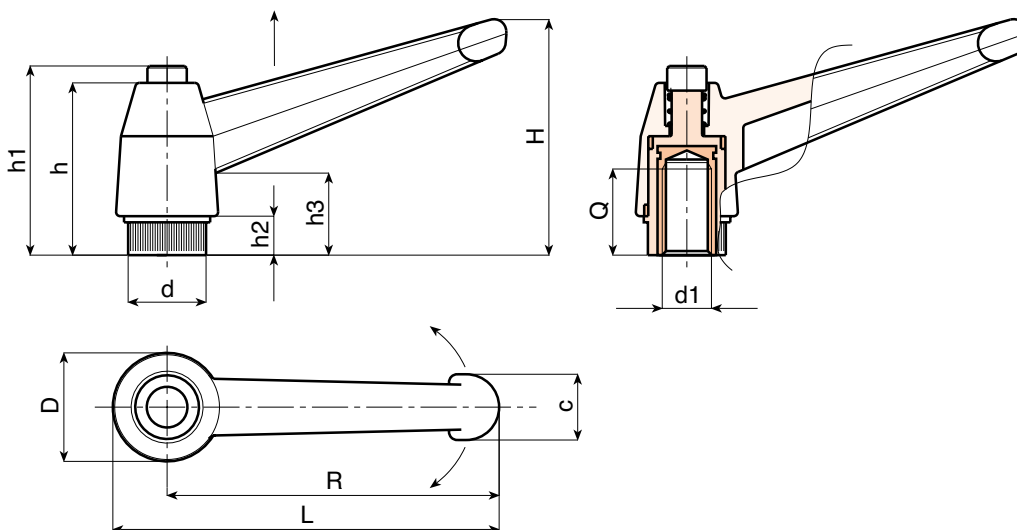

	Art.	L	R	H	D	d	c	h	h1	h2	h3	d1 6H	Q	g
●	A562043.TM0401CIN	52	43	33	17	11,5	11	27	30	6	14	M04	10	14
●	A562043.TM0501CIN	52	43	33	17	11,5	11	27	30	6	14	M05	9	14
●	A562043.TM0601CIN	52	43	33	17	11,5	11	27	30	6	14	M06	9	14
●	A562065.TM0601CIN	77	65	45	23	15	13	34	38	8	17	M06	15	28
●	A562065.TM0801CIN	77	65	45	23	15	13	34	38	8	17	M08	15	26
●	A562065.TM1001CIN	77	65	45	23	15	13	34	38	8	17	M10	13	28
●	A562083.TM0801CIN	97	83	57	27	19	16	43	47	10	23	M08	17	52
●	A562083.TM1001CIN	97	83	57	27	19	16	43	47	10	23	M10	17	48
●	A562083.TM1201CIN	97	83	57	27	19	16	43	47	10	23	M12	16	48
●	A562104.TM1001CIN	121	104	70	33	24	19	50	53	11	26	M10	20	114
●	A562104.TM1201CIN	121	104	70	33	24	19	50	53	11	26	M12	22	106
●	A562104.TM1401CIN	121	104	70	33	24	19	50	53	11	26	M14	21	100
●	A562104.TM1601CIN	121	104	70	33	24	19	50	53	11	26	M16	23	100

Presumable presence in the stock in %

(●) 90% (●) 40% (●) 5% (●)

ROLLMEX

INDEXED CLAMPING LEVER WITH PLASTIC PUSH BUTTON AND WITH STAINLESS STEEL THREADED STUD

A563 CIN



Material:

Special high resistance glass fiber reinforced technopolymer.
Oils and greases resistant.

Surface:

Satin.

Lever body and insert colour:

Black (RAL 9011).

Main insert:

Stainless steel threaded stud (AISI 304).
(Thread tolerance 6g).

Push Button:

Push button in black polyamide
(RAL 9011).

Alternative colours for lever body and button:


Orange (RAL 2004 cod. 02)
Blue (RAL 5015 cod. 07)
Yellow (RAL 1021 cod. 10)
Red (RAL 3000 cod. 16)
Green (RAL 6024 cod. 17)
Grey (RAL 7035 cod. 13)

Spring:

Stainless steel spring (AISI 302).

SPECIAL REQUESTS:

- It's possible to supply the inserts with different lengths, on request and for quantities.
- It's possible to supply the lever body and button with colours as shown in the table at page A-31 on request and for quantities.

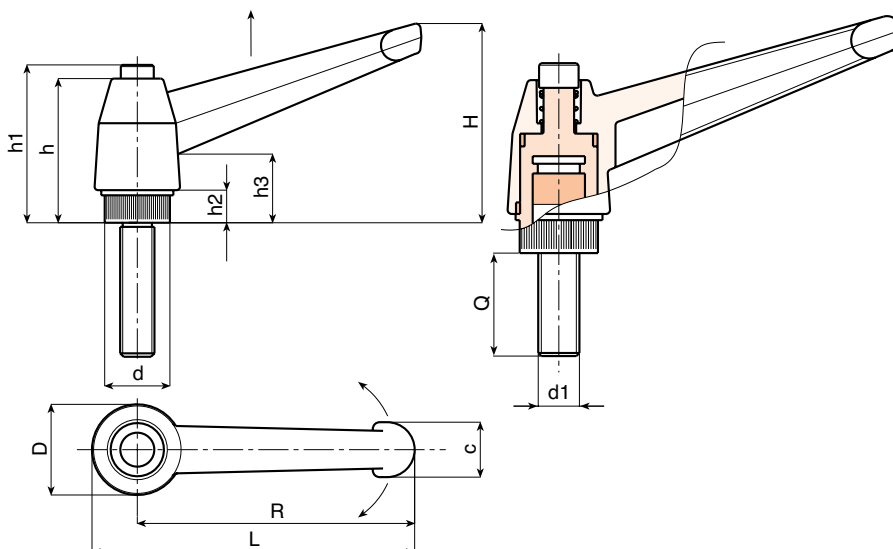

Art.	L	R	H	D	d	c	h	h1	h2	h3	LM	d1 6g	Q	g
A563043.TM04X..01CIN	52	43	33	17	11,5	11	27	30	6	14	75	M04	16-20-30	10-11-12
A563043.TM05X..01CIN	52	43	33	17	11,5	11	27	30	6	14	75	M05	16-20-30	14-15-16
A563043.TM06X..01CIN	52	43	33	17	11,5	11	27	30	6	14	75	M06	16-20-30	15-16-18
A563065.TM06X..01CIN	77	65	45	23	15	13	34	38	8	17	90	M06	16-20-30-40	24-25-27-29
A563065.TM08X..01CIN	77	65	45	23	15	13	34	38	8	17	90	M08	16-20-30-40	27-28-31-34
A563065.TM10X..01CIN	77	65	45	23	15	13	34	38	8	17	90	M10	16-20-30-40	30-33-38-43
A563083.TM08X..01CIN	97	83	57	27	19	16	43	47	10	23	90	M08	20-30-40-50	44-47-50-53
A563083.TM10X..01CIN	97	83	57	27	19	16	43	47	10	23	90	M10	20-30-40-50	52-57-62-67
A563083.TM12X..01CIN	97	83	57	27	19	16	43	47	10	23	90	M12	20-30-40-50	61-64-71-78
A563104.TM12X..01CIN	121	104	70	33	24	19	50	53	11	26	100	M12	20-30-40-50	86-93-101-108
A563104.TM14X..01CIN	121	104	70	33	24	19	50	53	11	26	100	M14	20-30-40-50	92-102-112-122
A563104.TM16X..01CIN	121	104	70	33	24	19	50	53	11	26	100	M16	20-30-40-50	111-122-134-146

Enter the stud length choice in the two .. of the article code. Lengths by request with 50 pieces minimum quantity.

LM = Maximum mouldable length.

Presumable presence in the stock in %

() 90% () 40% () 5% ()

ROLLMEX

A592

**ZAMAK**

ZAMAK ALLOY INDEXED CLAMPING LEVER WITH FEMALE THREADED INSERT

Material:

Die cast Zamak lever body
(zinc, aluminium, copper alloy).

Surface:

Smooth. Epoxy-powder painting finish.

Lever body colours:

Shiny Black	(RAL 9005 cod. 01)
Matt Black	(RAL 9005 cod. 20)
Orange	(RAL 2004 cod. 02)
Grey	(RAL 7031 cod. 80)
Silver	(RAL 9006 cod. 83)
Red	(RAL 3000 cod. 16)
Blue	(RAL 5015 cod. 07)
Natural Zamak	(cod. GRE)

Main insert:

Black-oxide steel insert, with blind threaded bore.
(Thread tolerance 6H).

Fixing screw:


Black-oxide treated steel screw with hexagon socket
head.

Spring:

Stainless steel spring (AISI 302).

SPECIAL REQUESTS:

- None.

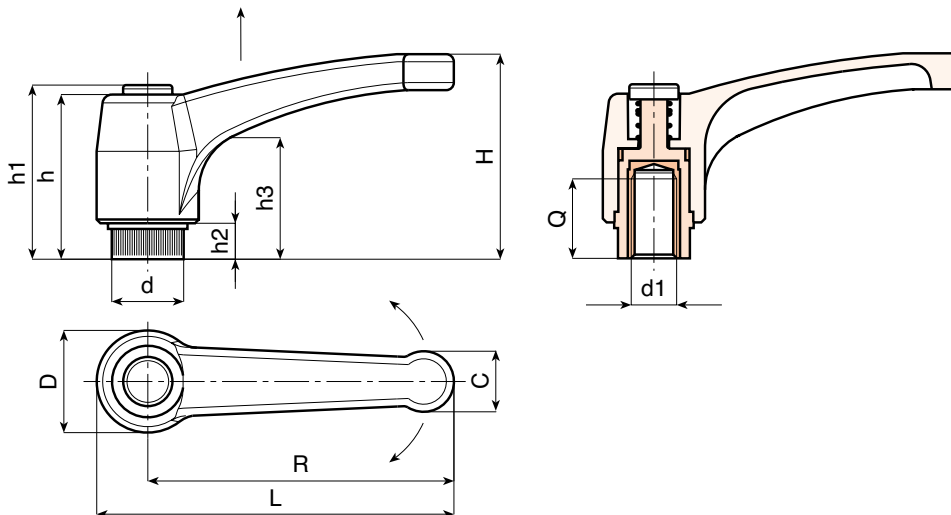

	Art.	L	R	H	D	d	c	h	h1	h2	h3	d1 6H	Q	g
●	A592043.ZM04..	50	43	30	14	10	9	26	30	5	14	M04	7	30
●	A592043.ZM05..	50	43	30	14	10	9	26	30	5	14	M05	9	30
●	A592043.ZM06..	50	43	30	14	10	9	26	30	5	14	M06	9	28
●	A592065.ZM06..	75	65	45	19	14	13	32	34	7	14	M06	10	76
●	A592065.ZM08..	75	65	45	19	14	13	32	34	7	14	M08	10	76
●	A592065.ZM10..	75	65	45	19	14	13	32	34	7	14	M10	9	73
●	A592080.ZM08..	91	80	57	22	16	16	40	42	8	16	M08	14	134
●	A592080.ZM10..	91	80	57	22	16	16	40	42	8	16	M10	13	130
●	A592080.ZM12..	91	80	57	22	16	16	40	42	8	16	M12	12	128
●	A592094.ZM12..	107	94	65	26	20	18	47	50	10,5	19	M12	17	195
●	A592094.ZM14..	107	94	65	26	20	18	47	50	10,5	19	M14	17	190
●	A592094.ZM16..	107	94	65	26	20	18	47	50	10,5	19	M16	17	188
●	A592108.ZM14..	123	108	75	30	23	20	54	56	12	23	M14	26	298
●	A592108.ZM16..	123	108	75	30	23	20	54	56	12	23	M16	26	284
●	A592108.ZM18..	123	108	75	30	23	20	54	56	12	23	M18	25	270

Enter the colour choice in the two .. of the article code. Example: Red lever R80 M10 - A592080.ZM1016

Availability of stock in %

||||| **ROLLMEX** ||||| () 90% () 40% () 5% ()

ZAMAK ALLOY INDEXED CLAMPING LEVER WITH MALE THREADED INSERT

A593



ZAMAK



Material:

Die cast Zamak lever body
(zinc, aluminium, copper alloy).

Surface:

Smooth. Epoxy-powder painting finish.

Lever body colours:

Shiny Black	(RAL 9005 cod. 01)
Matt Black	(RAL 9005 cod. 20)
Orange	(RAL 2004 cod. 02)
Grey	(RAL 7031 cod. 80)
Silver	(RAL 9006 cod. 83)
Red	(RAL 3000 cod. 16)
Blue	(RAL 5015 cod. 07)
Natural Zamak	(cod. GRE)

Main insert:

Black-oxide steel insert, with male threaded stud. (Thread tolerance 6g).

Fixing screw:

Black-oxide treated steel screw with hexagon socket head.


Spring:

Stainless steel spring (AISI 302).

SPECIAL REQUESTS:

- It's possible to supply the inserts with different lengths, on request and for 300 pieces minimum.

Attention: for insert lengths over LM, we'll use glued zinc plated steel male thread.

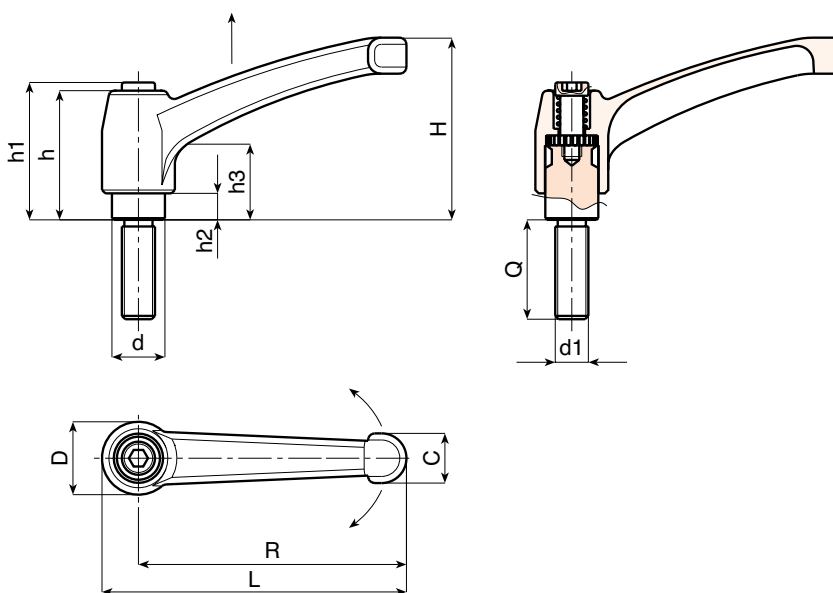

LM = Maximum turning length.

Art.	L	R	H	D	d	c	h	h1	h2	h3	LM	d1	eg	Q	Δ g
A593043.ZM04X....	50	43	30	14	10	9	26	30	5	14	50	M04		16-20-25-30	30-30-31-31
A593043.ZM05X....	50	43	30	14	10	9	26	30	5	14	50	M05		16-20-30-40	31-32-34-35
A593043.ZM06X....	50	43	30	14	10	9	26	30	5	14	60	M06		16-20-25-30-40-50	31-32-33-34-35-36
A593043.ZM08X....	50	43	30	14	10	9	26	30	5	14	60	M08		16-25-30-40-50	35-38-40-43-46
A593065.ZM06X....	75	65	45	19	14	13	32	34	7	14	60	M06		20-30-40-50	82-84-86-88
A593065.ZM08X....	75	65	45	19	14	13	32	34	7	14	60	M08		16-20-25-30-35-40-45-50	82-83-84-86-88-89-90-92
A593065.ZM10X....	75	65	45	19	14	13	32	34	7	14	60	M10		20-25-30-40-50	89-91-94-99-104
A593080.ZM08X....	91	80	57	22	16	16	40	42	8	16	60	M08		20-25-30-35-40-50	142-144-145-147-148-151
A593080.ZM10X....	91	80	57	22	16	16	40	42	8	16	60	M10		20-25-30-35-40-50-60	146-148-151-153-156-161-166
A593080.ZM12X....	91	80	57	22	16	16	40	42	8	16	70	M12		20-30-40-50-60	150-157-164-171-178
A593094.ZM12X....	107	94	65	26	20	17,5	47	50	10,5	19	70	M12		20-30-40-50	229-236-243-250
A593094.ZM14X....	107	94	65	26	20	17,5	47	50	10,5	19	70	M14		30-35-40-50-60	240-245-250-260-270
A593094.ZM16X....	107	94	65	26	20	17,5	47	50	10,5	19	80	M16		30-40-50	254-266-278
A593108.ZM12X....	123	108	75	30	23	20	54	56	12	23	80	M12		25-50	330-347
A593108.ZM14X....	123	108	75	30	23	20	54	56	12	23	80	M14		30-40-60	340-360-380
A593108.ZM16X....	123	108	75	30	23	20	54	56	12	23	80	M16		30-40-50-60	342-356-370-384
A593108.ZM18X....	123	108	75	30	23	20	54	56	12	23	80	M18		A.R.	-

Enter the colour choice and stud length in the four of the article code. Example: Red lever R80 M10x30 - A592080.ZM10X3016CIN

Availability of stock in %

(■) 90% (●) 40% (●) 5% (●)



A592 CIN



ZAMAK



ZAMAK ALLOY INDEXED CLAMPING LEVER WITH STAINLESS STEEL FEMALE THREADED INSERT

INOX

Material:

Die cast Zamak lever body
(zinc, aluminium, copper alloy).

Surface:

Smooth. Epoxy-powder painting finish.

Lever body colours:

Shiny Black	(RAL 9005 cod. 01)
Matt Black	(RAL 9005 cod. 20)
Orange	(RAL 2004 cod. 02)
Grey	(RAL 7031 cod. 80)
Silver	(RAL 9006 cod. 83)
Red	(RAL 3000 cod. 16)
Blue	(RAL 5015 cod. 07)
Natural Zamak	(cod. GRE)

Main insert:

Stainless steel insert, with blind threaded bore.
(Aisi 303) (Thread tolerance 6H).

Fixing screw:


Stainless steel screw with hexagon socket head.
(Aisi 304).

Spring:

Stainless steel spring (AISI 302).

SPECIAL REQUESTS:

- None.

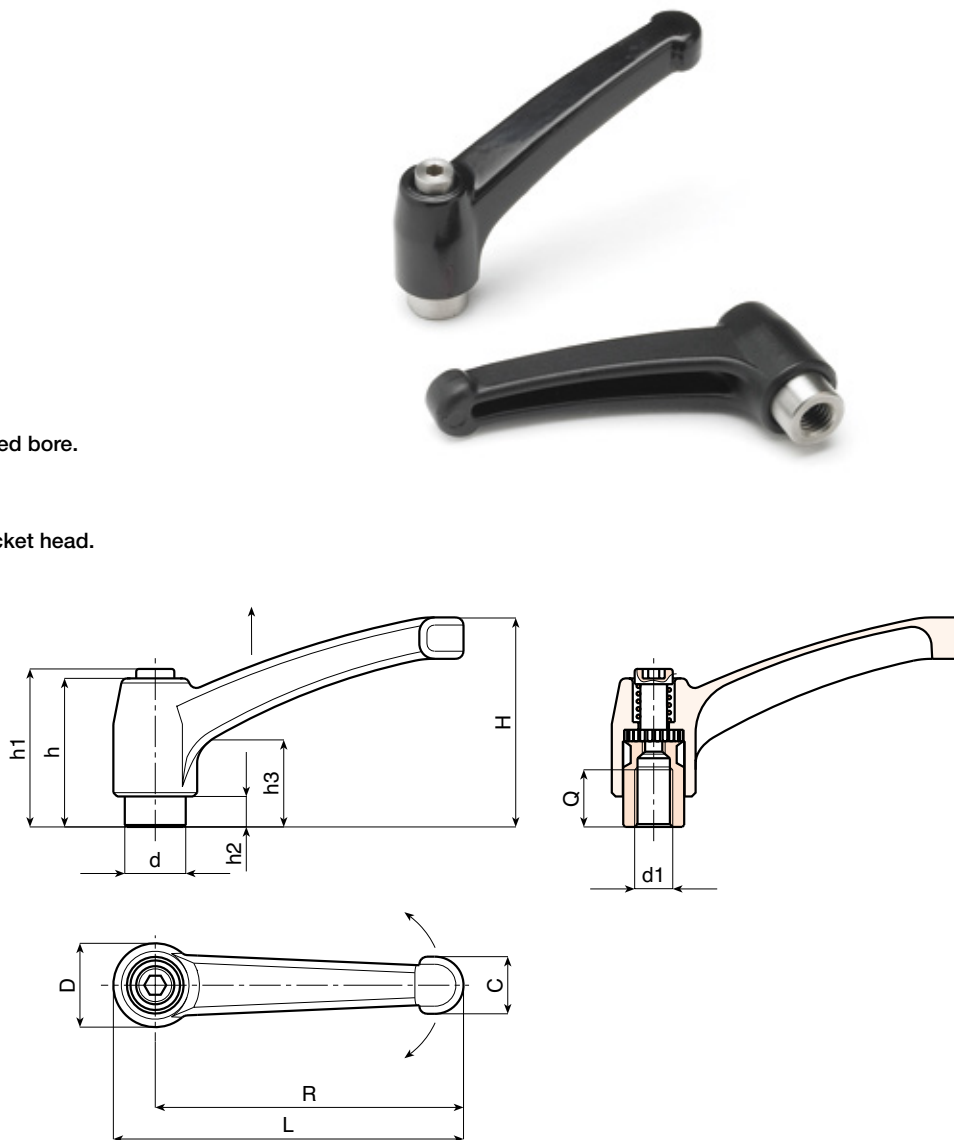

	Art.	L	R	H	D	d	c	h	h1	h2	h3	d1 6H	Q	g
●	A592043.ZM05..CIN	50	43	30	14	10	9	26	30	5	14	M05	9	30
●	A592043.ZM06..CIN	50	43	30	14	10	9	26	30	5	14	M06	9	28
●	A592065.ZM06..CIN	75	65	45	19	14	13	32	34	7	14	M06	10	78
●	A592065.ZM08..CIN	75	65	45	19	14	13	32	34	7	14	M08	10	76
●	A592065.ZM10..CIN	75	65	45	19	14	13	32	34	7	14	M10	10	74
●	A592080.ZM08..CIN	91	80	57	22	16	16	40	42	8	16	M08	14	134
●	A592080.ZM10..CIN	91	80	57	22	16	16	40	42	8	16	M10	13	130
●	A592080.ZM12..CIN	91	80	57	22	16	16	40	42	8	16	M12	12	128
●	A592094.ZM10..CIN	107	94	65	26	20	18	47	50	10,5	19	M10	17	191
●	A592094.ZM12..CIN	107	94	65	26	20	18	47	50	10,5	19	M12	17	195
●	A592094.ZM14..CIN	107	94	65	26	20	18	47	50	10,5	19	M14	17	190
●	A592108.ZM14..CIN	123	108	75	30	23	20	54	56	12	23	M14	26	298
●	A592108.ZM16..CIN	123	108	75	30	23	20	54	56	12	23	M16	26	284

Enter the colour choice in the two .. of the article code. Example: Red lever R80 M10 - A592080.ZM1016

Availability of stock in %

||||| ROLLMEX ||||| () 90% () 40% () 5%

ZAMAK ALLOY INDEXED CLAMPING LEVER WITH STAINLESS STEEL MALE THREADED INSERT

A593 CIN



ZAMAK



INOX

Material:

Die cast Zamak lever body
(zinc, aluminium, copper alloy).

Surface:

Smooth. Epoxy-powder painting finish.

Lever body colours:

Shiny Black	(RAL 9005 cod. 01)
Matt Black	(RAL 9005 cod. 20)
Orange	(RAL 2004 cod. 02)
Grey	(RAL 7031 cod. 80)
Silver	(RAL 9006 cod. 83)
Red	(RAL 3000 cod. 16)
Blue	(RAL 5015 cod. 07)
Natural Zamak	(cod. GRE)

Main insert:

Stainless steel insert, with male threaded stud.
(Aisi 303) (Thread tolerance 6g).

Fixing screw:

Stainless steel screw with hexagon socket
head. (Aisi 304).


Spring:

Stainless steel spring (AISI 302).

SPECIAL REQUESTS:

- It's possible to supply the inserts with different lengths, on request and for 300 pieces minimum.

Attention: for insert lengths over LM, we'll use glued stainless steel male thread.

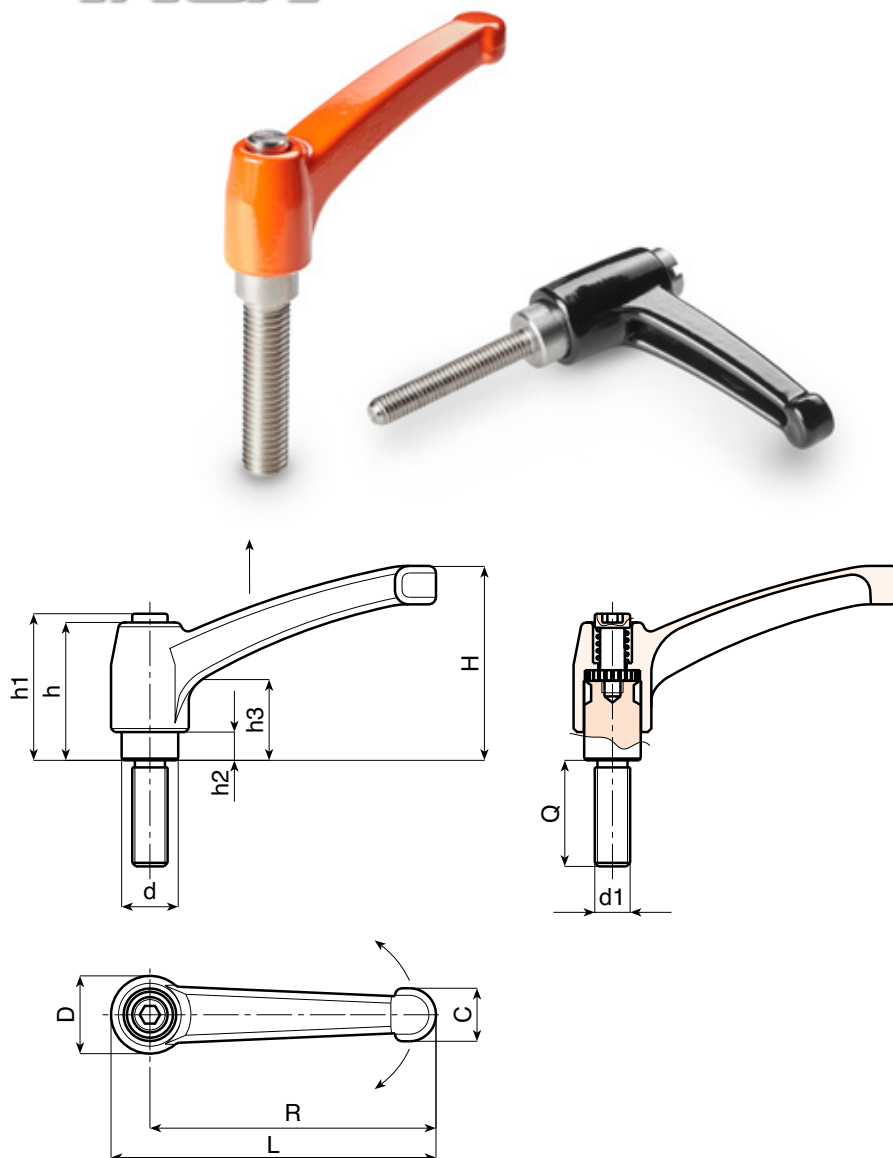

Art.	L	R	H	D	d	c	h	h1	h2	h3	LM	d1	6g	Q	⚖ g
A593043.ZM05X....CIN	50	43	30	14	10	9	26	30	5	14	50	M05		16-20-30	31-32-34
A593043.ZM06X....CIN	50	43	30	14	10	9	26	30	5	14	50	M06		16-20-30	31-32-34
A593043.ZM08X....CIN	50	43	30	14	10	9	26	30	5	14	60	M08		25	39
A593065.ZM08X....CIN	75	65	45	19	14	13	32	34	7	14	60	M08		16-20-30-40	82-83-86-89
A593065.ZM10X....CIN	75	65	45	19	14	13	32	34	7	14	60	M10		30-40	94-99
A593080.ZM10X....CIN	91	80	57	22	16	16	40	42	8	16	60	M10		20-30-40	146-151-156
A593080.ZM12X....CIN	91	80	57	22	16	16	40	42	8	16	60	M12		20-30-50	150-157-171
A593094.ZM12X....CIN	107	94	65	26	20	17,5	47	50	10,5	19	60	M12		20-30	229-236
A593094.ZM14X....CIN	107	94	65	26	20	17,5	47	50	10,5	19	60	M14		30-50	240-260
A593094.ZM16X....CIN	107	94	65	26	20	17,5	47	50	10,5	19	70	M16		50	278
A593108.ZM14X....CIN	123	108	75	30	23	20	54	56	12	23	70	M14		A.R.	-
A593108.ZM16X....CIN	123	108	75	30	23	20	54	56	12	23	70	M16		A.R.	-

Enter the colour choice and stud length in the four of the article code.

Example: Red lever R80 M10x30 - A592080.ZM10X3016CIN

LM = maximum turning length.

A.R. = by request with 300/600 pieces minimum.

Availability of stock in %

(■) 90% (●) 40% (●) 5% (●)

ROLLMEX

A572



PA6
+GF

UL94
HB



INDEXED CLAMPING LEVER WITH 90° ARM AND FEMALE THREADED INSERT

Material:

Special high resistance glass fiber reinforced technopolymer. Oils and greases resistant.

Surface:

Satin.

Lever body and insert colour:

Black (RAL 9011).

Main insert:

Zinca plated steel insert with threaded blind bore.
(Thread tolerance 6H).

Fixing screw:

Black-oxide treated steel screw with slotted head.


Spring:

Stainless steel spring (AISI 302).



SPECIAL REQUESTS:

- It's possible to supply the inserts with different materials, on request and for quantities.
- It's possible to supply the lever body with colours as shown in the table at page A-31 on request and for quantities.

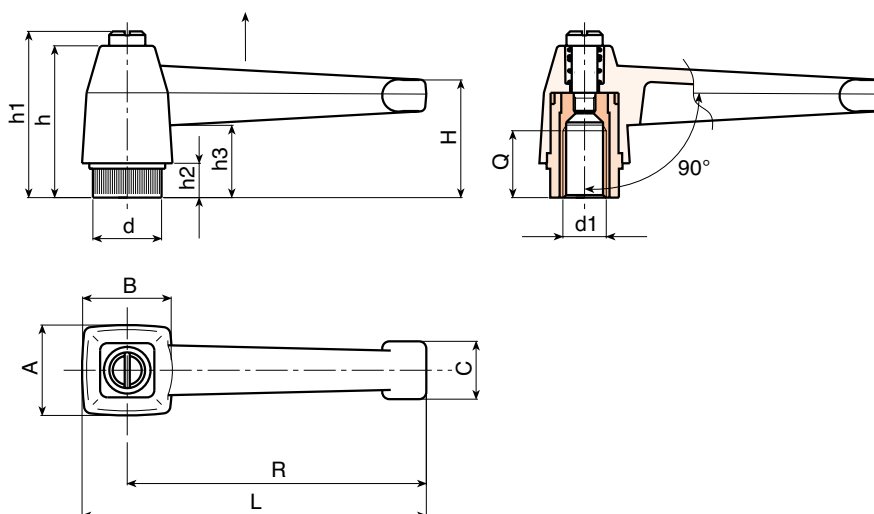

	Art.	L	R	H	A	B	c	h	h1	h2	h3	d1 6H	Q	g
●	A572083.TM0801	94	83	33,5	25	25	16	42	47	10	21	M08	17	52
●	A572083.TM1001	94	83	33,5	25	25	16	42	47	10	21	M10	17	48
●	A572083.TM1201	94	83	33,5	25	25	16	42	47	10	21	M12	16	48

Presumable presence in the stock in %

() 90% (●) 40% (●) 5% (●)

ROLLMEX

INDEXED CLAMPING LEVER WITH 90° ARM AND MALE THREADED INSERT

A573



Material:

Special high resistance glass fiber reinforced technopolymer. Oils and greases resistant.

Surface:

Satin.

Lever body and insert colour:

Black (RAL 9011).

Main insert:

Zinc plated steel threaded stud.
(Thread tolerance 6g).

Fixing screw:

Black-oxide treated steel screw with slotted head.


Spring:

Stainless steel spring (AISI 302).



SPECIAL REQUESTS:

- It's possible to supply the inserts with different lengths, on request and for quantities.
- It's possible to supply the inserts with different materials, on request and for quantities.
- It's possible to supply the lever body with colours as shown in the table at page A-31 on request and for quantities.

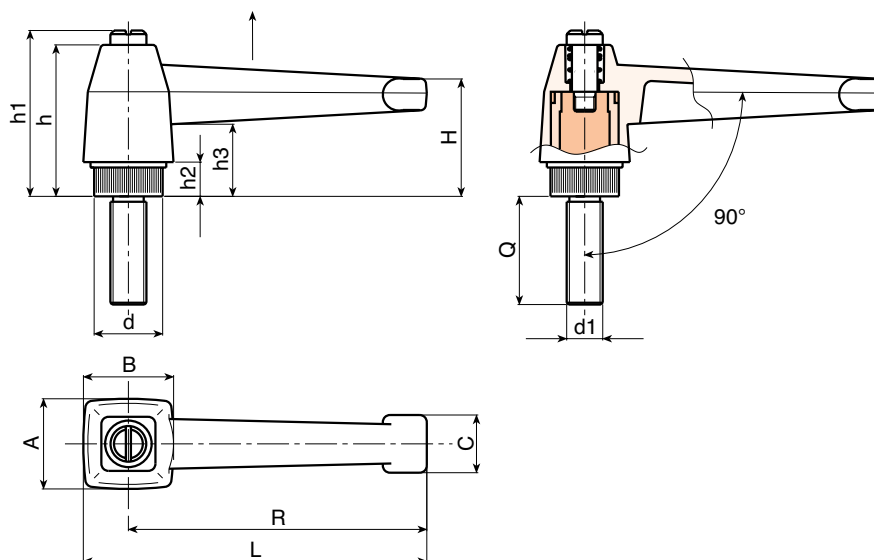

	Art.	L	R	H	A	B	c	h	h1	h2	h3	LM	d1 6g	Q	g
●	A573083.TM08X..01	94	83	33,5	25	25	16	42	47	10	21	90	M08	20-40	58-64
●	A573083.TM10X..01	94	83	33,5	25	25	16	42	47	10	21	90	M10	20-40	68-76
●	A573083.TM12X4001	94	83	33,5	25	25	16	42	47	10	21	90	M12	40	82

Enter the stud length choice in the two .. of the article code. Lengths by request with 100 pieces minimum quantity.

LM = Maximum mouldable length.


Presumable presence in the stock in %

() 90% () 40% () 5% ()

ROLLMEX

SECTION START

FIXED LEVERS

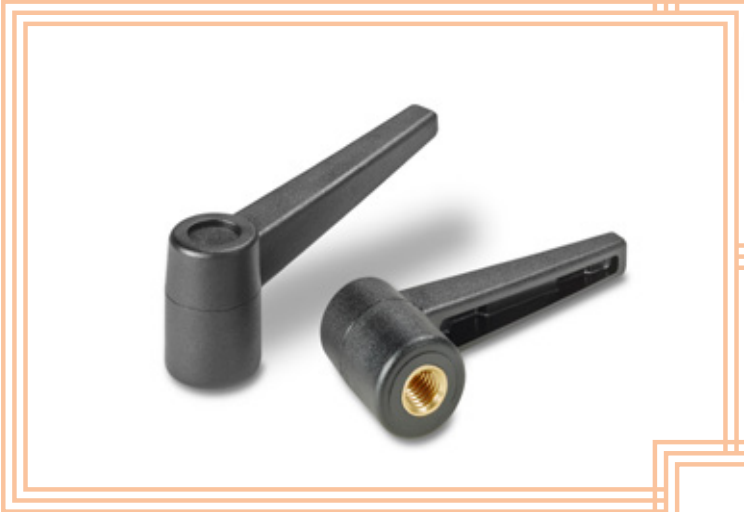

"EUROMODEL" FIXED LEVER WITH THREADED INSERT



A530



Material:

Special high resistance glass fiber reinforced technopolymer.
Oils and greases resistant.

Surface:

Satin.

Colour:


Black (RAL 9011).

Main Insert:

Brass insert, with threaded right through bore. (thread tolerance 6H).

SPECIAL REQUESTS:

- It's possible to supply the inserts with different materials, on request and for quantities.
- It's possible to supply the lever body with colours as shown in the table at page A-31 on request and for quantities.

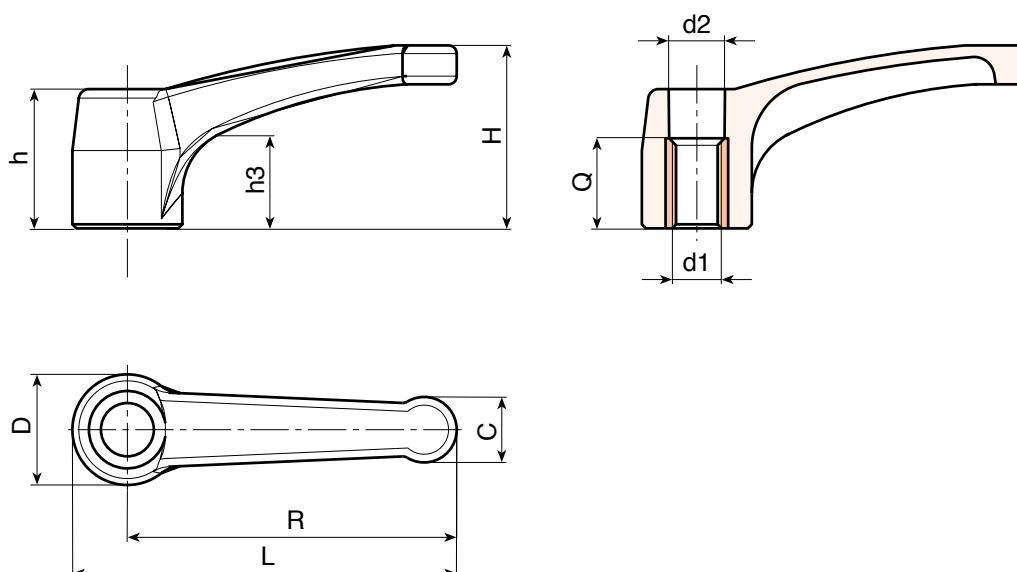

	Art.	L	R	H	D	c	h	h1	d2	d1 6H	Q	g
●	A530094.TM1001	109	94	48,5	30	18	35,5	49	16	M12	22	81

Availability of stock in %

(■) 90% (●) 40% (●) 5% (●)



A150



PA6
+GF

UL94
HB



"EUROMODEL" FIXED LEVER WITH FEMALE THREADED INSERT

PROTECTED
MODEL

Material:

Special high resistance glass fiber reinforced technopolymer. Oils and greases resistant.

Surface:

Satin.

Colour:

Black (RAL 9011).

Central Cap:

grey polyamide (RAL 7035).

Main Insert:

Zinc plated steel insert, with right through threaded bore (thread tolerance 6H).

Alternative cap colours

Orange (RAL 2004 cod. 02)

Blue (RAL 5015 cod. 07)

Yellow (RAL 1021 cod. 10)



Red (RAL 3000 cod. 16)

Green (RAL 6024 cod. 17)

Black (RAL 9011 cod. 01)

SPECIAL REQUESTS:

- Fixing springs and balls (zinc plated steel) available upon request.
- It's possible to supply the inserts with different materials, on request and for quantities.
- It's possible to supply the inserts with different treatment, on request and for quantities.
- It's possible to supply the lever body and cap with colours as shown in the table at page A-31 on request and for quantities.

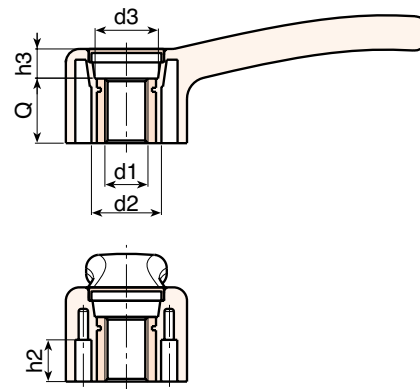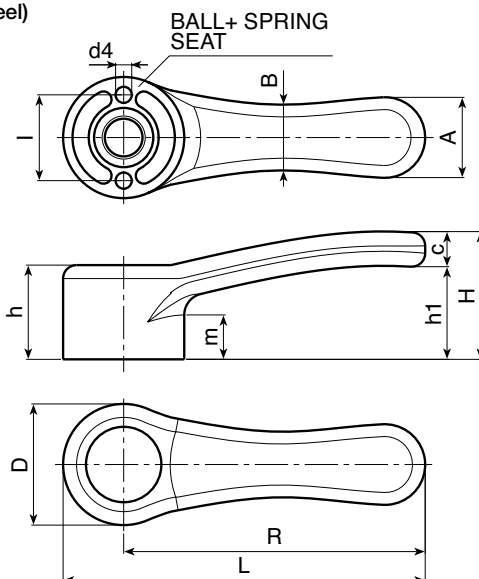

	Art.	L	R	D	H	h	h1	h2	h3	m	l	A	B	c	d2	d3	d4	d1 6H	Q	g
●	A150068.TM0601	84,5	68	33	37	25	27	11,5	9	12	24	20	17	10	20	16	4	M06	16	42
●	A150068.TM0801	84,5	68	33	37	25	27	11,5	9	12	24	20	17	10	20	16	4	M08	16	40
●	A150068.TM1001	84,5	68	33	37	25	27	11,5	9	12	24	20	17	10	20	16	4	M10	16	40
●	A150086.TM0801	104	86	36	40	28	29	14	12	13	26	24	19	11	22	18	5	M08	16	72
●	A150086.TM1001	104	86	36	40	28	29	14	12	13	26	24	19	11	22	18	5	M10	16	71
●	A150086.TM1201	104	86	36	40	28	29	14	12	13	26	24	19	11	22	18	5	M12	16	70
●	A150112.TM1201	134,5	112	45	47	36	35	14,5	12	16	32	30	24	13	26	23,5	6	M12	24	99
●	A150112.TM1401	134,5	112	45	47	36	35	14,5	12	16	32	30	24	13	26	23,5	6	M14	24	98
●	A150112.TM1601	134,5	112	45	47	36	35	14,5	12	16	32	30	24	13	26	23,5	6	M16	24	95
●	A150142.TM1401	169,5	142	55	52	40	36	18	13	17,5	40	37	30	16	32	28	8	M14	27	240
●	A150142.TM1601	169,5	142	55	52	40	36	18	13	17,5	40	37	30	16	32	28	8	M16	27	235
●	A150142.TM1801	169,5	142	55	52	40	36	18	13	17,5	40	37	30	16	32	28	8	M18	27	230

Availability of stock in %

() 90% (●) 40% (●) 5% (●)

ROLLMEX

"EUROMODEL" FIXED LEVER WITH SMOOTH BORED INSERT

A151



**PROTECTED
MODEL**

Material:

Special high resistance glass fiber reinforced technopolymer.
Oils and greases resistant.

Surface:

Satin.

Colour:

Black (RAL 9011).

Central Cap:

grey polyamide (RAL 7035).

Main Insert:

Zinc plated steel insert, with right through smooth bore (bore tolerance H10).

Alternative cap colours

Orange (RAL 2004 cod. 02)

Blue (RAL 5015 cod. 07)

Yellow (RAL 1021 cod. 10)

Red (RAL 3000 cod. 16)



Green (RAL 6024 cod. 17)

Black (RAL 9011 cod. 01)



SPECIAL REQUESTS:

- Fixing springs and balls (zinc plated steel) available upon request.
- It's possible to supply the inserts with d1 diameter by customer design, on request and for quantities.
- It's possible to supply the inserts with different materials, on request and for quantities.
- It's possible to supply the inserts with different treatment, on request and for quantities.
- It's possible to supply the lever body and cap with colours as shown in the table at page A-31 on request and for quantities.

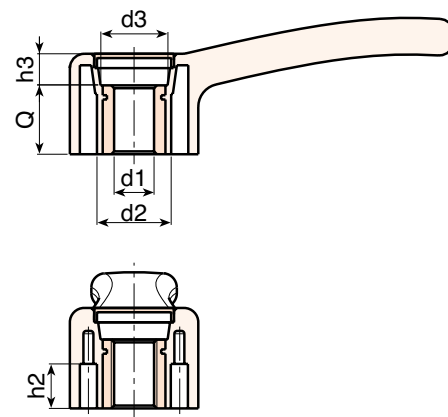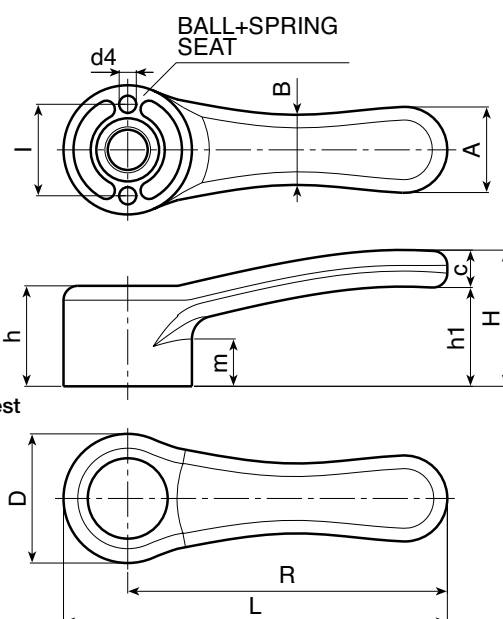

	Art.	L	R	D	H	h	h1	h2	h3	m	l	A	B	c	d2	d3	d4	dm	d1 H10	Q	g
●	A151068.TD0501	84,5	68	33	37	25	27	11,5	9	12	24	20	17	10	20	16	4	10	05	16	45
●	A151068.TD1001	84,5	68	33	37	25	27	11,5	9	12	24	20	17	10	20	16	4	10	10	16	44
●	A151086.TD0501	104	86	36	40	28	29	14	12	13	26	24	19	11	22	18	5	12	05	16	65
●	A151086.TD0801	104	86	36	40	28	29	14	12	13	26	24	19	11	22	18	5	12	08	16	63
●	A151086.TD1001	104	86	36	40	28	29	14	12	13	26	24	19	11	22	18	5	12	10	16	61
●	A151086.TD1201	104	86	36	40	28	29	14	12	13	26	24	19	11	22	18	5	12	12	16	59
●	A151112.TD0501	134,5	112	45	47	36	35	14,5	12	16	32	30	24	13	26	23,5	6	16	05	24	128
●	A151112.TD1201	134,5	112	45	47	36	35	14,5	12	16	32	30	24	13	26	23,5	6	16	12	24	124
●	A151142.TD0501	169,5	142	55	52	40	36	18	13	17,5	40	37	30	16	32	28	8	20	05	27	250

Attention: bore d1 (H10 tolerance) could be produced by request, with 100 pieces minimum.

Dm = It's possible to increase the hole, by boring, until Dm (enlarge).

Availability of stock in %

() 90% (●) 40% (●) 5% (●)

ROLLMEX

A528



PA6
+GF

UL94
HB



FIXED LEVER WITH FEMALE THREADED INSERT

Material:

Reinforced Polyamide.
Oils and grases resistant.

Surface:

Satin.

Colour:


Black (RAL 9011).

Main insert:

Brass insert with threaded blind bore.
(Thread tolerance 6H).

SPECIAL REQUESTS:

- It's possible to supply the inserts with different materials, on request and for quantities.
- It's possible to supply the lever body with colours as shown in the table at page A-31 on request and for quantities.

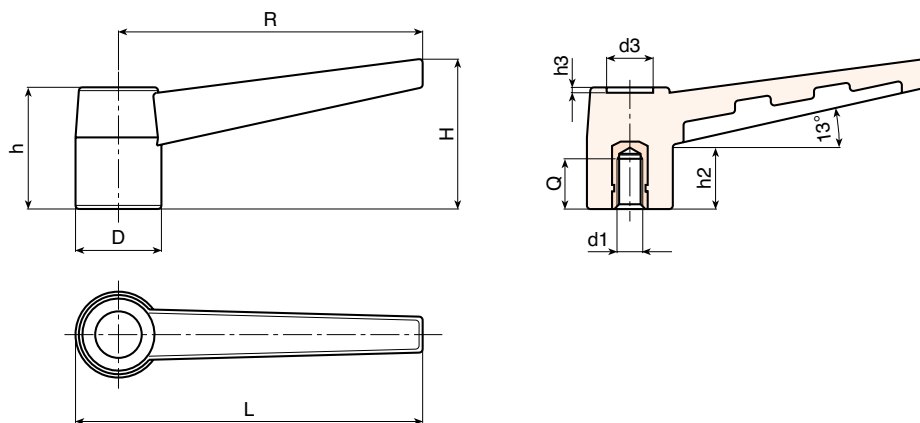

	Art.	L	R	H	D	h	h2	h3	d3	d1 6H	Q	g
●	A52843.TM0501	50	43	21,5	15	19	9	1	7	M05	10	8
●	A52843.TM0601	50	43	21,5	15	19	9	1	7	M06	10	8
●	A52868.TM0601	78	68	36	21	28,5	11	2	10	M06	10	24
●	A52868.TM0801	78	68	36	21	28,5	11	2	10	M08	15	22
●	A52883.TM0601	93	83	40	24	34	18	2	13	M06	10	30
●	A52883.TM0801	93	83	40	24	34	18	2	13	M08	15	32
●	A52883.TM1001	93	83	40	24	34	18	2	13	M10	14	32

Presumable presence in the stock in %

() 90% (●) 40% (●) 5% (●)

ROLLMEX

FIXED LEVER WITH MALE THREADED STUD

A529



Material:

Reinforced Polyamide.
Oils and grases resistant.

Surface:

Satin.

Colour:



Black (RAL 9011).

Main insert:

Zinc plated steel threaded stud.
(Thread tolerance 6g).

SPECIAL REQUESTS:

- It's possible to supply the inserts with different lengths, on request and for quantities.
- It's possible to supply the inserts with different materials, on request and for quantities.
- It's possible to supply the lever body with colours as shown in the table at page A-31 on request and for quantities.

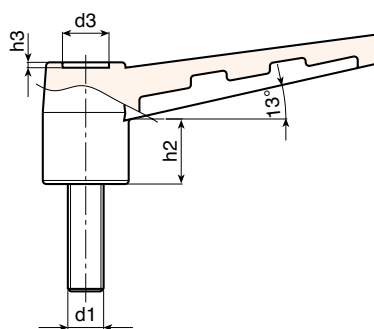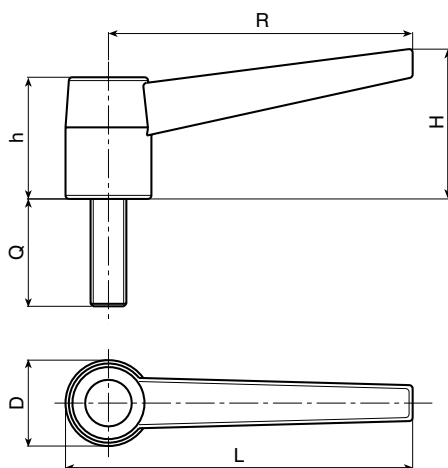

Art.	L	R	H	D	h	h2	h3	d3	LM	d1 6g	Q	g
A52943.TM05X..01	50	43	21,5	15	19	9	1	7	30	M05	10-20-30	9-10-11
A52943.TM06X..01	50	43	21,5	15	19	9	1	7	30	M06	10-20-30-40	10-12-14-16
A52968.TM06X..01	78	68	36	21	28,5	11	2	10	50	M06	10-20	25-27
A52968.TM08X..01	78	68	36	21	28,5	11	2	10	50	M08	16-20-30-40	30-32-36-39
A52983.TM06X..01	93	83	40	24	34	18	2	13	60	M06	A.R.	-
A52983.TM08X..01	93	83	40	24	34	18	2	13	60	M08	20-30-40-60	44-47-50-56
A52983.TM10X..01	93	83	40	24	34	18	2	13	60	M10	20-30-40	48-53-58

Enter the stud length choice in the two .. of the article code. Lengths by request with 100 pieces minimum quantity.

LM = Maximum mouldable length.

Presumable presence in the stock in %

() 90% () 40% () 5% ()



A524



PA6
+GF

UL94
HB



FIXED LEVER WITH FEMALE THREADED INSERT

Material:

Reinforced Polyamide.
Oils and grases resistant.

Surface:

Satin.

Colour:

Black (RAL 9011).

Main insert:



Brass insert with threaded blind bore.
(Thread tolerance 6H).

(*) Zinc plated steel insert with blind threaded bore.
(Thread tolerance 6H).



SPECIAL REQUESTS:

- It's possible to supply the inserts with different materials, on request and for quantities.

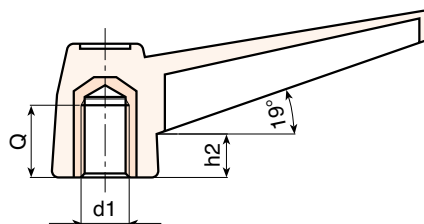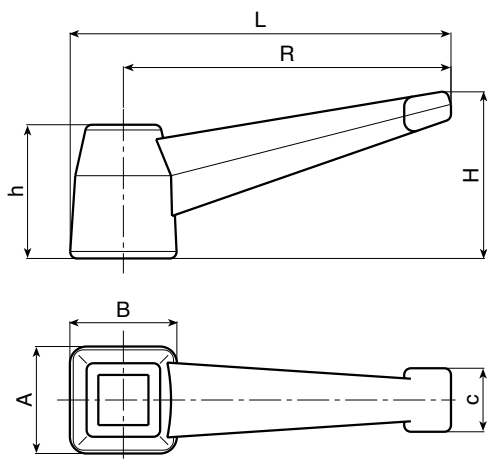

	Art.	L	R	H	A	B	c	h	h2	d1 6H	Q	g
●	A52498.TM1001	112	96	51	32	32	19	40	12	M12	19	64
●	A52498.TM1201	112	96	51	32	32	19	40	12	M14	19	68
●	A52498.TM1401	112	96	51	32	32	19	40	12	(*) M16	16	80

Presumable presence in the stock in %

() 90% (●) 40% (●) 5% (●)

ROLLMEX

FIXED LEVER WITH FEMALE THREADED INSERT

A525



PA6
+GF

UL94
HB



Material:

Reinforced Polyamide.
Oils and grases resistant.

Surface:

Satin.

Colour:


Black (RAL 9011).

Main insert:

Zinc plated steel threaded stud.
(Thread tolerance 6g).

SPECIAL REQUESTS:

- It's possible to supply the inserts with different lengths, on request and for quantities.
- It's possible to supply the inserts with different materials, on request and for quantities.

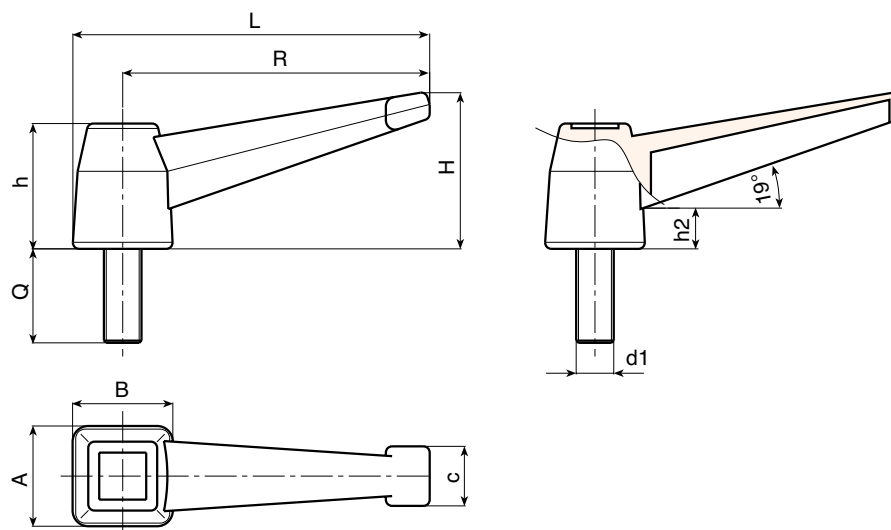

	Art.	L	R	H	A	B	c	h	h2	LM	d1 6g	Q	Δ g
●	A52598.TM10X4001	112	96	51	32	32	19	40	12	100	M10	40	95
●	A52598.TM12X4001	112	96	51	32	32	19	40	12	100	M12	40	113
●	A52598.TM14X..01	112	96	51	32	32	19	40	12	100	M14	A.R.	-
●	A52598.TM16X4001	112	96	51	32	32	19	40	12	100	M16	40	141

Enter the stud length choice in the two .. of the article code. Lengths by request with 100 pieces minimum quantity.

LM = Maximum mouldable length.

Presumable presence in the stock in %

() 90% (●) 40% (●) 5% (●) | ROLLMEX

A148



PA6
+GF

UL94
HB



LOCKING HANDLES WITH THREADED FEMALE INSERT

Material:

Reinforced Polyamide.
Oils and grases resistant.

Surface:

Satin.

Colour:

Black (RAL 9011).

Central Cap:



grey polyamide (RAL 7035).

Main insert:

Brass insert with threaded blind bore.
(Thread tolerance 6H).

SPECIAL REQUESTS:

- It's possible to supply the inserts with different materials, on request and for quantities.

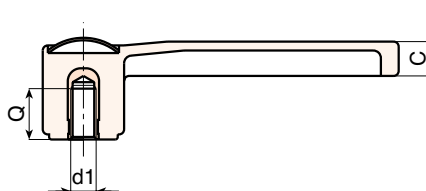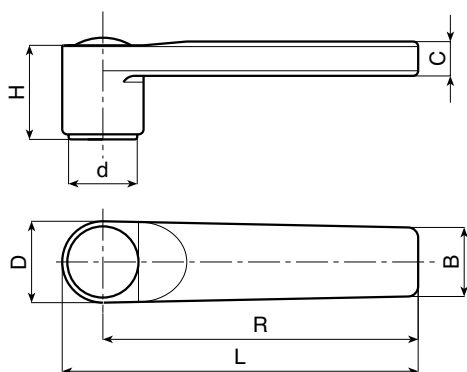

	Art.	L	R	H	D	c	B	h1	d	d1 6H	Q	g
●	A148125.TM1001	139	125	37	31	13	26	35	27,5	M10	20	78
●	A148125.TM1201	139	125	37	31	13	26	35	27,5	M12	18	84
●	A148125.TM1401	139	125	37	31	13	26	35	27,5	M14	19	90

Presumable presence in the stock in %

() 90% (●) 40% (●) 5% (●)

LOCKING HANDLES WITH THREADED MALE STUD

A149



PA6
+GF

UL94
HB



Material:

Reinforced Polyamide.
Oils and grases resistant.

Surface:

Satin.

Colour:

Black (RAL 9011).

Central Cap:


grey polyamide (RAL 7035).

Main insert:

Zinc plated steel threaded stud.
(Thread tolerance 6g).

SPECIAL REQUESTS:

- It's possible to supply the inserts with different lengths, on request and for quantities.
- It's possible to supply the inserts with different materials, on request and for quantities.

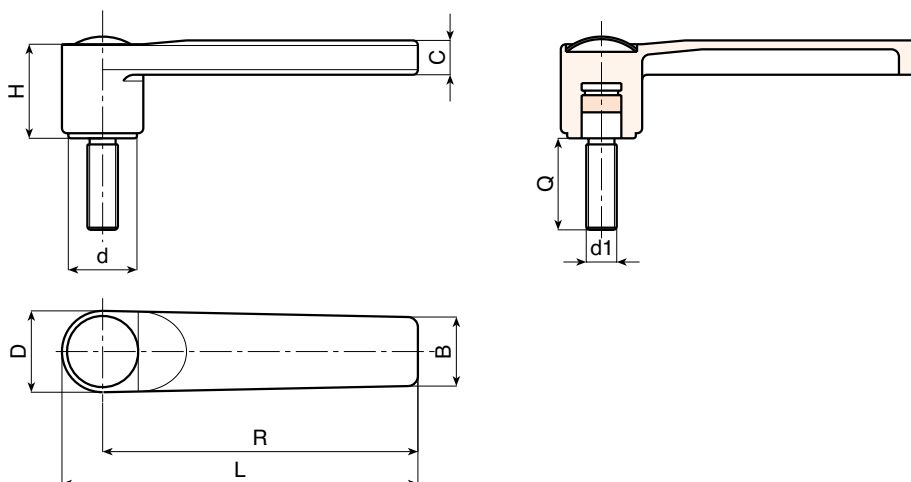

	Art.	L	R	H	D	c	B	h1	d	LM	d1 6g	Q	Δ g
●	A149125.TM10X..01	139	125	37	31	13	26	35	27,5	50	M10	A.R.	-
●	A149125.TM12X..01	139	125	37	31	13	26	35	27,5	50	M12	A.R.	-
●	A149125.TM14X..01	139	125	37	31	13	26	35	27,5	50	M14	A.R.	-

Enter the stud length choice in the two .. of the article code. Lengths by request with 100 pieces minimum quantity.

LM = Maximum mouldable length.

Presumable presence in the stock in %

() 90% () 40% () 5% ()


ROLLMEX

COLOUR CHART

RAL COLOURS CODING

Colour		RAL	Cod.
Black		9011	01
Orange		2004	02
Orange		2011	03
White		9010	04
Blue		5002	05
Blue		5005	06
Blue		5015	07
Blue		5018	19
Blue		5019	21
Blue		5010	22
Yellow		1007	09
Yellow		1021	10
Grey		7024	12
Grey		7035	13
Red		3000	16
Green		6024	17

OTHER COLORS

Colour		Ref.	Cod.
White		-	52
Blue		-	53
Blue		pant. 645 U	54
Blue		pant. 300	55
Grey		-	57
Grey		-	59
Grey		NCS 7500	60
Red		-	64
Red		-	65
Natural		-	66
Green		-	70
Brown		-	71
Cream		-	72
Violet		-	73

ROLLMEX OY

TAMPERE

Takojankatu 4 - 33540 TAMPERE

Puh. 010-6661122

tampere@rollmex.fi

LAHTI

Karjalankatu 21 - 15140 LAHTI

Puh. 010-6661121

lahti@rollmex.fi

WWW.ROLLMEX.FI

