

**FAMILY - F
SOLID LOCKING
HANDWHEELS**



ROLLMEX

SOLID 6 LOBE KNOB WITH FEMALE THREADED INSERT

F110



PA6
+GF

UL94
HB



Material:

Reinforced polyamide.
Oils and greases resistant.

Surface:

Satin.

Colour:




Black (RAL 9011).

Main Insert:

Brass blind threaded bush (tolerance 6H).

SPECIAL REQUEST:

- It is possible to supply the inserts in different materials, on request and for quantities.
- It is possible to supply colours as shown in the table at pag. F-35, on request and for quantities.

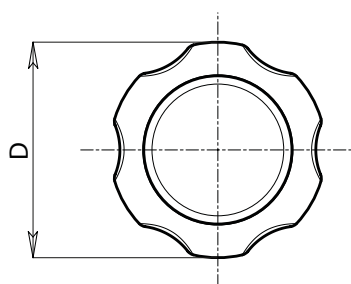

	Art.	D	d	H	m	c	d1 6H	Q	g
●	F110022.TM0401	22	12	17,5	11	6,5	M04	8	5,5
●	F110022.TM0501	22	12	17,5	11	6,5	M05	8	6,5
●	F110027.TM0501	27	14	22	13	9	M05	10	9
●	F110027.TM0601	27	14	22	13	9	M06	10	9,5
●	F110033.TM0801	33	19	26	15	11	M08	13	16
●	F110033.TM1001	33	19	26	15	11	M10	13	17

Presumable presence in the stock in %

() 90% (●) 40% (●) 5% (●) | **ROLLMEX** |

F111**PA6
+GF****UL94
HB**

SOLID 6 LOBE KNOB WITH MALE THREADED STUD

Material:

Reinforced polyamide.

Oils and greases resistant.

Surface:

Satin.

Colour:




Black (RAL 9011).

Main Insert:

Zinc plated steel threaded stud (tolerance 6g).

SPECIAL REQUESTS:

- It is possible to supply inserts in different lengths or by special design, on request and for quantities.
- It is possible to supply inserts in different materials, on request and for quantities.
- It is possible to supply colours as shown in the table on page F-35, on request and for quantities.



	Art.	D	d	H	m	c	d1 6g	Q	LM	g
●	F111022.TM04X..01	22	12	17,5	11	6,5	M04	16-30	50	6-7
●	F111022.TM05X..01	22	12	17,5	11	6,5	M05	16-30	50	7-8
●	F111027.TM05X..01	27	14	22	13	9	M05	20-40	60	10-11
●	F111027.TM06X..01	27	14	22	13	9	M06	20-40	60	12-13
●	F111033.TM08X..01	33	19	26	15	11	M08	20-40	70	18-22
●	F111033.TM10X..01	33	19	26	15	11	M10	20-50	70	24-27

Enter the stud length choice in the two .. of the article code. Lengths by request with 50 pieces minimum quantity.

LM = Maximum mouldable length.

Presumable presence in the stock in %

() 90% (●) 40% (●) 5% (●)

ROLLMEX

SOLID 6 LOBE HANDWHEEL WITH FEMALE THREADED INSERT

F175



Material:

Reinforced polyamide.
Oils and greases resistant.

Surface:

Satin.

Colour:


Black (RAL 9011).

Main Insert:

Brass blind threaded bush (tolerance 6H).

SPECIAL REQUEST:

- It is possible to supply the inserts in different materials, on request and for quantities.
- It is possible to supply colours as shown in the table at pag. F-35, on request and for quantities.

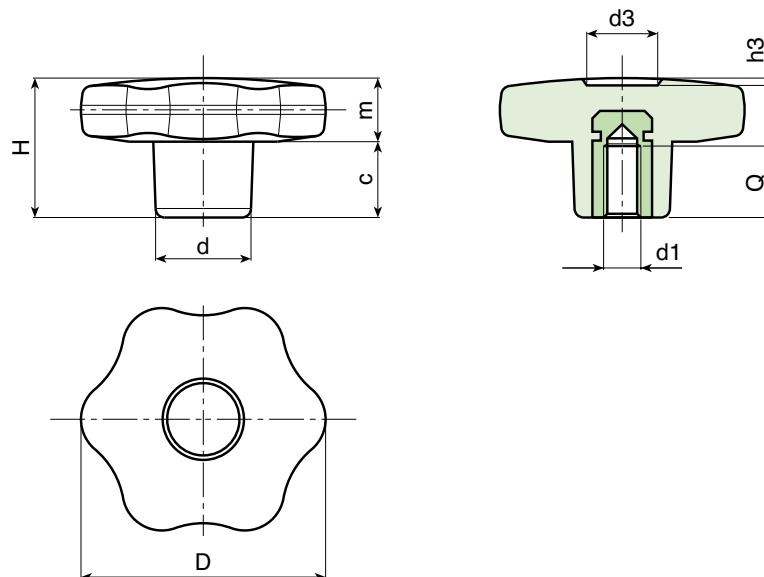

	Art.	D	H	d	c	m	d3	h3	d1 6H	Q	Δ g
●	F17530.TM0401	30	22	15	11	11	9	1,5	M04	7	11,5
●	F17530.TM0501	30	22	15	11	11	9	1,5	M05	14	11,5
●	F17530.TM0601	30	22	15	11	11	9	1,5	M06	10	12
●	F17530.TM0801	30	22	15	11	11	9	1,5	M08	14	13,5
●	F17530.TM1001	30	22	15	11	11	9	1,5	M10	14	14
●	F17540.TM0501	40	24,5	17	12	12,5	12	1	M05	14	22
●	F17540.TM0601	40	24,5	17	12	12,5	12	1	M06	16	22
●	F17540.TM0801	40	24,5	17	12	12,5	12	1	M08	14	21,5
●	F17540.TM1001	40	24,5	17	12	12,5	12	1	M10	14	21
●	F17550.TM0601	50	29	20	14	15	14,5	1,5	M06	16	36
●	F17550.TM0801	50	29	20	14	15	14,5	1,5	M08	14	36
●	F17550.TM1001	50	29	20	14	15	14,5	1,5	M10	14	37
●	F17550.TM1201	50	29	20	14	15	14,5	1,5	M12	18	39
●	F17560.TM0801	60	34	24	16	18	18	1,5	M08	19	59
●	F17560.TM1001	60	34	24	16	18	18	1,5	M10	21	59
●	F17560.TM1201	60	34	24	16	18	18	1,5	M12	18	62
●	F17560.TM1401	60	34	24	16	18	18	1,5	M14	19	63

Presumable presence in the stock in %

() 90% () 40% () 5% ()

ROLLMEX

F175 CIN



SOLID 6 LOBE HANDWHEEL WITH FEMALE STAINLESS STEEL THREADED INSERT

INOX

Material:

Reinforced polyamide.
Oils and greases resistant.

Surface:

Satin.

Colour:


Black (RAL 9011).

Main Insert:

Stainless steel blind threaded bush (AISI 303)
(tolerance 6H).

SPECIAL REQUEST:

- It is possible to supply colours as shown in the table at pag. F-35, on request and for quantities.

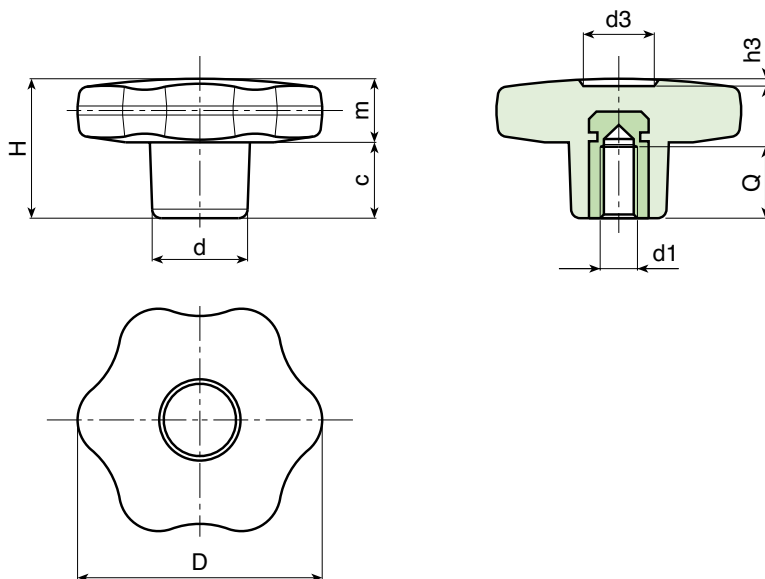

	Art.	D	H	d	c	m	d3	h3	d1 6H	Q	g
●	F17530.TM0501CIN	30	22	15	11	11	9	1,5	M05	14	11,5
●	F17530.TM0601CIN	30	22	15	11	11	9	1,5	M06	10	12
●	F17530.TM0801CIN	30	22	15	11	11	9	1,5	M08	14	13,5
●	F17540.TM0601CIN	40	24,5	17	12	12,5	12	1	M06	16	22
●	F17540.TM0801CIN	40	24,5	17	12	12,5	12	1	M08	14	21,5
●	F17540.TM1001CIN	40	24,5	17	12	12,5	12	1	M10	14	21
●	F17550.TM0801CIN	50	29	20	14	15	14,5	1,5	M08	14	36
●	F17550.TM1001CIN	50	29	20	14	15	14,5	1,5	M10	14	37
●	F17550.TM1201CIN	50	29	20	14	15	14,5	1,5	M12	13	39
●	F17560.TM0801CIN	60	34	24	16	18	18	1,5	M08	19	59
●	F17560.TM1001CIN	60	34	24	16	18	18	1,5	M10	21	59
●	F17560.TM1201CIN	60	34	24	16	18	18	1,5	M12	18	62

Presumable presence in the stock in %

||||| **ROLLMEX** ||||| () 90% () 40% () 5% ()

SOLID 6 LOBE HANDWHEEL WITH SMOOTH BORED INSERT

F176



PA6
+GF

UL94
HB



Material:

Reinforced polyamide.
Oils and greases resistant.

Surface:

Satin.

Colour:

Black (RAL 9011).

Main Insert:


Brass insert with smooth blind hole (tolerance H7).

(*) Zinc plated steel insert with smooth blind hole
(tolerance H10).

ATTENTION: bore cannot be enlarged.

SPECIAL REQUEST:

- It is possible to supply the inserts in different materials, on request and for quantities.
- It is possible to supply colours as shown in the table at pag. F-35, on request and for quantities.

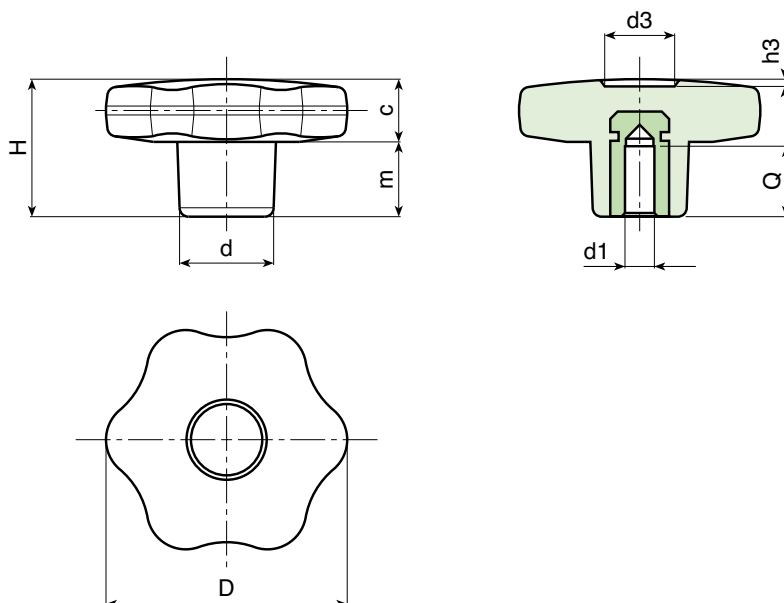

	Art.	D	H	d	c	m	d3	h3	d1 H7	Q	g
●	F17630.TD0601	30	22	15	11	11	9	1,5	06	15	17
●	F17630.TD0801	30	22	15	11	11	9	1,5	08	15	19
●	F17640.TD0601	40	24,5	17	12	12,5	12	1	06	15	24
●	F17640.TD0801	40	24,5	17	12	12,5	12	1	08	15	26
●	F17640.TD1001	40	24,5	17	12	12,5	12	1	10	17	28
●	F17650.TD0601	50	29	20	14	15	14,5	1,5	06	15	39
●	F17650.TD0801	50	29	20	14	15	14,5	1,5	08	15	41
●	F17650.TD1001	50	29	20	14	15	14,5	1,5	10	17	42
●	F17660.TD0801	60	34	24	16	18	18	1,5	(*) 08	18	78
●	F17660.TD1001	60	34	24	16	18	18	1,5	(*) 10	25	73
●	F17660.TD1201	60	34	24	16	18	18	1,5	(*) 12	22	75

Presumable presence in the stock in %

(■) 90% (●) 40% (●) 5% (●)

ROLLMEX

F177



PA6
+GF

UL94
HB



SOLID 6 LOBE HANDWHEEL WITH RIGHT THROUGH FEMALE THREADED INSERT

Material:

Reinforced polyamide.
Oils and greases resistant.

Surface:

Satin.

Colour:


Black (RAL 9011).

Main Insert:

Brass right through threaded bush (tolerance 6H).

SPECIAL REQUEST:

- It is possible to supply the inserts in different materials, on request and for quantities.
- It is possible to supply colours as shown in the table at pag. F-35, on request and for quantities.

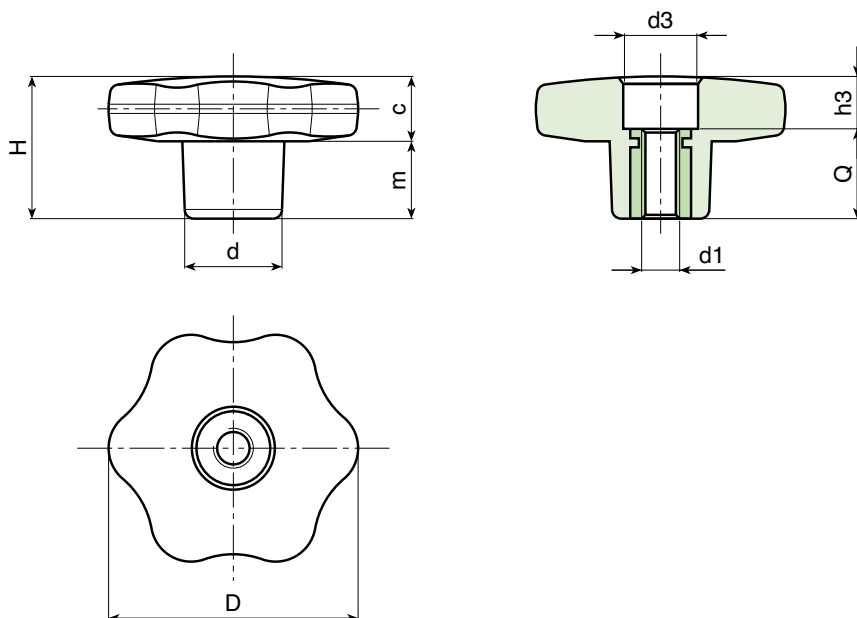

	Art.	D	H	d	c	m	d3	h3	d1 6H	Q	g
●	F17730.TM0501	30	22	15	11	11	11	4	M05	18	12
●	F17730.TM0601	30	22	15	11	11	11	4	M06	18	13
●	F17730.TM0801	30	22	15	11	11	11	4	M08	18	13
●	F17730.TM1001	30	22	15	11	11	11	4	M10	18	14
●	F17740.TM0601	40	24,5	17	12	12,5	12	6	M06	18	20
●	F17740.TM0801	40	24,5	17	12	12,5	12	6	M08	18	21
●	F17740.TM1001	40	24,5	17	12	12,5	12	6	M10	18	22
●	F17750.TM0601	50	29	20	14	15	14	11	M06	18	33
●	F17750.TM0801	50	29	20	14	15	14	11	M08	18	34
●	F17750.TM1001	50	29	20	14	15	14	11	M10	18	35
●	F17750.TM1201	50	29	20	14	15	14	11	M12	18	35
●	F17760.TM0801	60	34	24	16	18	15	16	M08	18	54
●	F17760.TM1001	60	34	24	16	18	15	16	M10	18	55
●	F17760.TM1201	60	34	24	16	18	15	16	M12	18	55
●	F17760.TM1401	60	34	24	16	18	15	16	M14	18	56

Presumable presence in the stock in %

() 90% (●) 40% (●) 5% (●)

ROLLMEX

SOLID 6 LOBE HANDWHEEL WITH RIGHT THROUGH FEMALE THREADED STAINLESS STEEL INSERT

F177 CIN



INOX

Material:

Reinforced polyamide.
Oils and greases resistant.

Surface:

Satin.

Colour:


Black (RAL 9011).

Main Insert:

Stainless steel right through threaded bush (AISI 303)
(tolerance 6H).

SPECIAL REQUEST:

- It is possible to supply colours as shown in the table at pag. F-35, on request and for quantities.

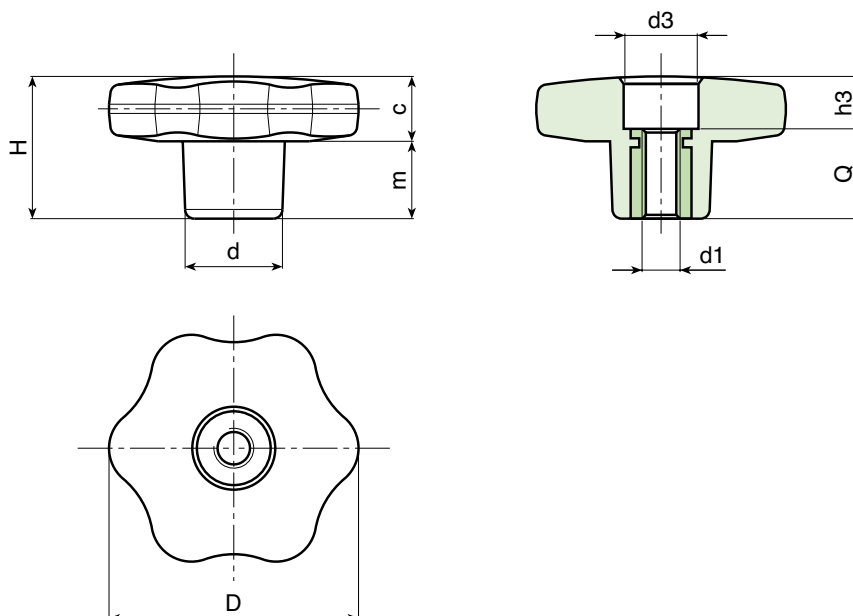

	Art.	D	H	d	c	m	d3	h3	d1 6H	Q	Δ g
●	F17730.TM0501PIN	30	22	15	11	11	11	4	M05	18	12
●	F17730.TM0601PIN	30	22	15	11	11	11	4	M06	18	13
●	F17730.TM0801PIN	30	22	15	11	11	11	4	M08	18	13
●	F17740.TM0601PIN	40	24,5	17	12	12,5	12	6	M06	18	20
●	F17740.TM0801PIN	40	24,5	17	12	12,5	12	6	M08	18	21
●	F17740.TM1001PIN	40	24,5	17	12	12,5	12	6	M10	18	22
●	F17750.TM0801PIN	50	29	20	14	15	14	11	M08	18	34
●	F17750.TM1001PIN	50	29	20	14	15	14	11	M10	18	35
●	F17750.TM1201PIN	50	29	20	14	15	14	11	M12	18	35
●	F17760.TM0801PIN	60	34	24	16	18	15	16	M08	18	54
●	F17760.TM1001PIN	60	34	24	16	18	15	16	M10	18	55
●	F17760.TM1201PIN	60	34	24	16	18	15	16	M12	18	55

Presumable presence in the stock in %

(●) 90% (●) 40% (●) 5% (●) | **ROLLMEX** |

F178



PA6
+GF

UL94
HB



SOLID 6 LOBE HANDWHEEL WITH MALE THREADED STUD

Material:

Reinforced polyamide.
Oils and greases resistant.

Surface:

Satin.

Colour:


Black (RAL 9011).

Main Insert:

Zinc plated steel threaded stud (tolerance 6g).

SPECIAL REQUESTS:

- It is possible to supply inserts in different lengths or by special design, on request and for quantities.
- It is possible to supply inserts in different materials, on request and for quantities.
- It is possible to supply colours as shown in the table on page F-35, on request and for quantities.

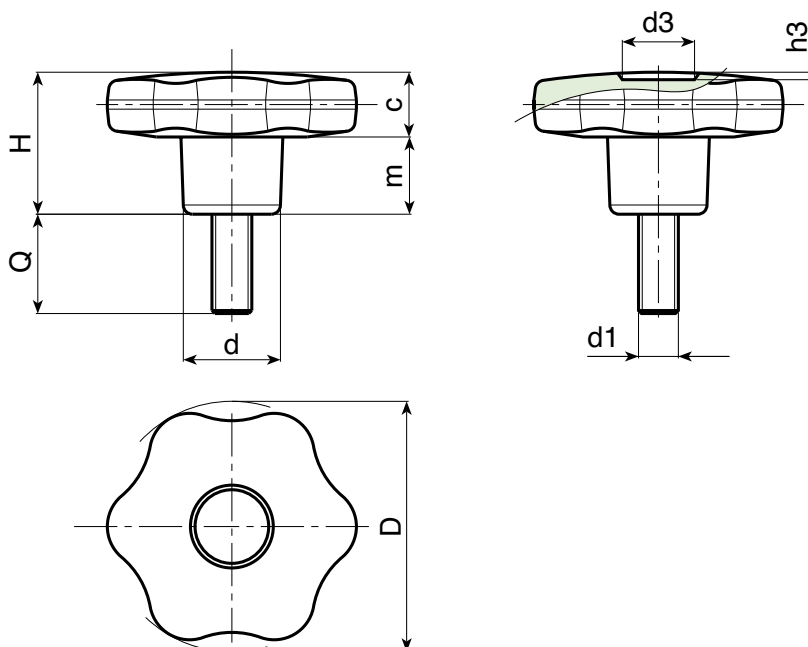

Art.	D	H	d	c	m	d3	h3	LM	d1 6g	Q	Δ g
F17830.TM05X..01	30	22	15	11	11	9	1,5	80	M05	10-16-20-30-40	13-14-15-16-17
F17830.TM06X..01	30	22	15	11	11	9	1,5	80	M06	10-16-20 25-30-40	15-16-17 17,5-18-19
F17830.TM08X..01	30	22	15	11	11	9	1,5	80	M08	16-20-30-40	19-21-25-28
F17830.TM10X..01	30	22	15	11	11	9	1,5	80	M10	20-30-40	28-33-39
F17840.TM06X..01	40	24,5	17	12	12,5	12	1	130	M06	16-20-30-40	25-25-27-28
F17840.TM08X..01	40	24,5	17	12	12,5	12	1	130	M08	16-20-25-30 35-40-45-50	28-30-31-33 34-36-38-39
F17840.TM10X..01	40	24,5	17	12	12,5	12	1	130	M10	20-30-40-50	37-41-45-49
F17850.TM08X..01	50	29	20	14	15	14,5	1,5	130	M08	15-20-30-40	48-49-52-55
F17850.TM10X..01	50	29	20	14	15	14,5	1,5	130	M10	20-25-30-40-50	55-57-60-61-64
F17850.TM12X..01	50	29	20	14	15	14,5	1,5	130	M12	20-30-40-50	63-67-72-77
F17860.TM08X..01	60	34	24	16	18	18	1,5	130	M08	30-40	71-74
F17860.TM10X..01	60	34	24	16	18	18	1,5	130	M10	20-30-40-50	74-80-85-88
F17860.TM12X..01	60	34	24	16	18	18	1,5	130	M12	20-30-40-50	95-102-109-116
F17860.TM14X..01	60	34	24	16	18	18	1,5	130	M14	A.R.	-

Enter the stud length choice in the two .. of the article code. Lengths by request with 150 pieces minimum quantity.

LM = Maximum mouldable length.

A.R. = By request. Minimum order quantity 150.

Presumable presence in the stock in %

||||| **ROLLMEX** ||||| () 90% () 40% () 5% ()

SOLID 6 LOBE HANDWHEEL WITH STAINLESS STEEL MALE THREADED STUD

F178 CIN



INOX

Material:

Reinforced polyamide.
Oils and greases resistant.

Surface:

Satin.

Colour:


Black (RAL 9011).

Main Insert:

Stainless steel threaded stud (AISI 304) (tolerance 6g).

SPECIAL REQUESTS:

- It is possible to supply inserts in different lengths or by special design, on request and for quantities.
- It is possible to supply colours as shown in the table on page F-35, on request and for quantities.

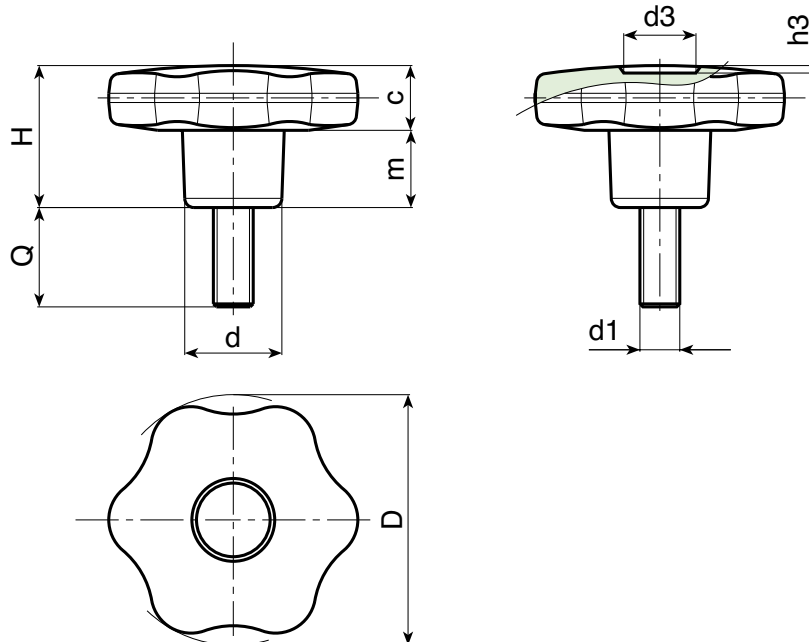

Art.	D	H	d	c	m	d3	h3	LM	d1 6g	Q	Δ g
F17830.TM05X..01CIN	30	22	15	11	11	9	1,5	80	M05	16-20-40	14-15-17
F17830.TM06X..01CIN	30	22	15	11	11	9	1,5	80	M06	16-20-30-40	16-17-18-19
F17830.TM08X..01CIN	30	22	15	11	11	9	1,5	80	M08	20-30	21-25
F17830.TM10X2001CIN	30	22	15	11	11	9	1,5	80	M10	20	28
F17840.TM06X..01CIN	40	24,5	17	12	12,5	12	1	130	M06	20-30-40	25-27-28
F17840.TM08X..01CIN	40	24,5	17	12	12,5	12	1	130	M08	20-30-40	30-33-36
F17840.TM10X4001CIN	40	24,5	17	12	12,5	12	1	130	M10	40	45
F17850.TM08X4001CIN	50	29	20	14	15	14,5	1,5	130	M08	40	55
F17850.TM10X..01CIN	50	29	20	14	15	14,5	1,5	130	M10	20-30-40-50	55-60-65-70
F17850.TM12X..01CIN	50	29	20	14	15	14,5	1,5	130	M12	A.R.	-
F17860.TM08X4001CIN	60	34	24	16	18	18	1,5	130	M08	40	74
F17860.TM10X4001CIN	60	34	24	16	18	18	1,5	130	M10	40	74-80-85
F17860.TM12X..01CIN	60	34	24	16	18	18	1,5	130	M12	20-40	95-109
F17860.TM14X..01CIN	60	34	24	16	18	18	1,5	130	M14	A.R.	-

Enter the stud length choice in the two .. of the article code. Lengths by request with 150 pieces minimum quantity.

LM = Maximum mouldable length.

A.R. = By request. Minimum order quantity 150.

Presumable presence in the stock in %

() 90% () 40% () 5% ()

ROLLMEX

F275-F275CIN



SOLID 6 LOBE HANDWHEEL WITH STEEL/STAINLESS STEEL HUB AND THREADED HOLE

Material:

Reinforced polyamide.
Oils and greases resistant.

Surface:

Satin.

Colour:

Black (RAL 9011).

Inserts:


F275: Zinc plated steel insert with female blind threaded hole (thread tolerance 6H).

F275 CIN: Stainless steel (AISI 303) insert with female blind threaded hole (thread tolerance 6H).



SPECIAL REQUESTS:

- It's possible to supply the inserts with d1 bore by customer design, on request and for quantities.
- It is possible to supply colours as shown in the table on page F-35, on request and for quantities.

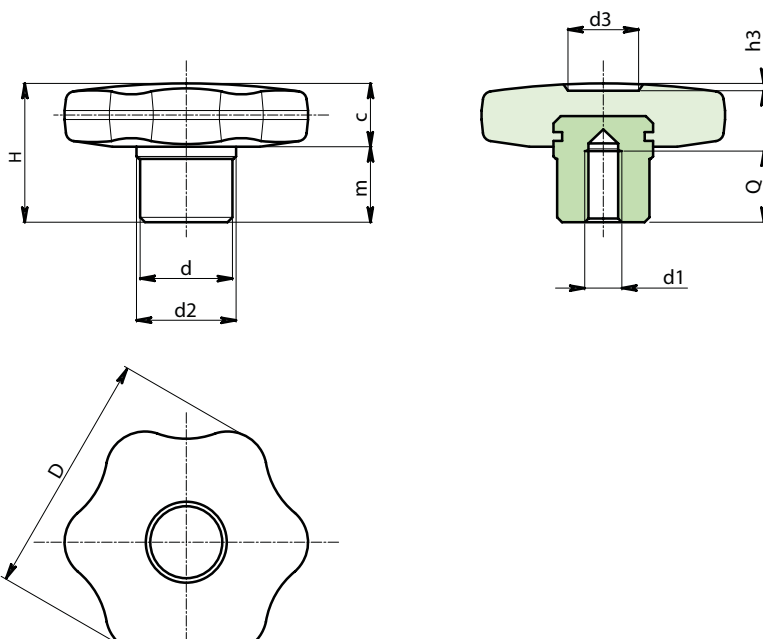

Version F275: Zinc plated steel

	Art.	D	d	d2	H	m	c	d1 6H	Q	g
●	F27530.TM0601	30	13	15	22	11	11	M06	12	25
●	F27540.TM0801	40	15	17	24	12	12	M08	14	39
●	F27550.TM1001	50	18	20	29	15	14	M10	16	66
●	F27560.TM1201	60	20	24	34	18	16	M12	20	105

Version F275 CIN: Stainless steel AISI 303

	Art.	D	d	d2	H	m	c	d1 6H	Q	g
●	F27530.TM0601CIN	30	13	15	22	11	11	M06	12	25
●	F27540.TM0801CIN	40	15	17	24	12	12	M08	14	39
●	F27550.TM1001CIN	50	18	20	29	15	14	M10	16	66
●	F27560.TM1201CIN	60	20	24	34	18	16	M12	20	105

INOX

Presumable presence in the stock in %

||||| **ROLLMEX** ||||| () 90% () 40% () 5% ()

SOLID 6 LOBE HANDWHEEL WITH STEEL/STAINLESS STEEL HUB AND SMOOTH HOLE

F276-F276CIN



Material:

Reinforced polyamide.
Oils and greases resistant.

Surface:

Satin.

Colour:

Black (RAL 9011).


Inserts:

F276: Zinc plated steel insert with female blind smooth hole (tolerance H10).

F276 CIN: Stainless steel (AISI 303) insert with female blind smooth hole (tolerance H9).

SPECIAL REQUESTS:

- It's possible to supply the inserts with d1 bore by customer design, on request and for quantities.
- It is possible to supply colours as shown in the table on page F-35, on request and for quantities.

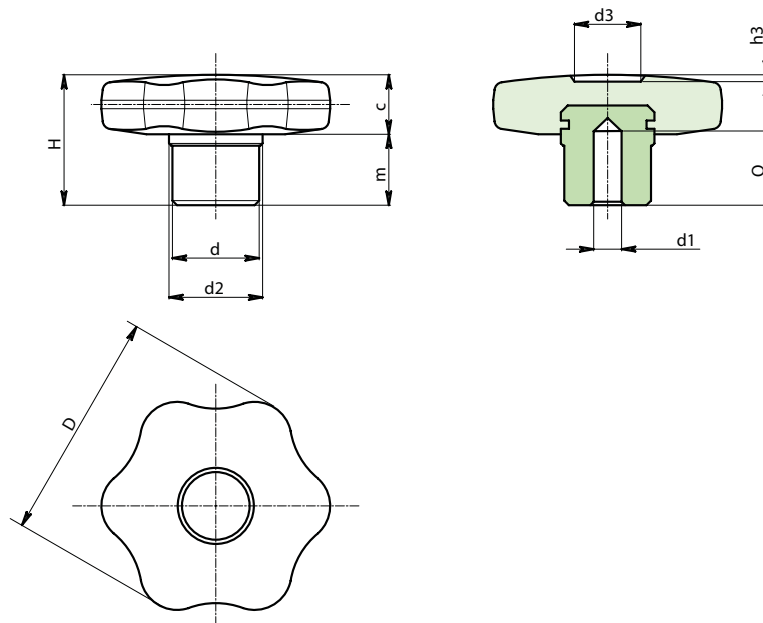

Version F276: Zinc plated steel

	Art.	D	d	d2	H	m	c	d1 H10	Q	g
●	F27630.TD0601	30	13	15	22	11	11	06	12	26
●	F27640.TD0801	40	15	17	24	12	12	08	14	40
●	F27650.TD1001	50	18	20	29	15	14	10	16	67
●	F27660.TD1201	60	20	24	34	18	16	12	20	102

Version F276 CIN: Stainless steel AISI 303

INOX

	Art.	D	d	d2	H	m	c	d1 H9	Q	g
●	F27630.TD0601CIN	30	13	15	22	11	11	06	12	26
●	F27640.TD0801CIN	40	15	17	24	12	12	08	14	40
●	F27650.TD1001CIN	50	18	20	29	15	14	10	16	67
●	F27660.TD1201CIN	60	20	24	34	18	16	12	20	102

Presumable presence in the stock in %

() 90% (●) 40% (●) 5% (●) | **ROLLMEX** |

F277-F277PIN



PA6
+GF

UL94
HB



SOLID 6 LOBE HANDWHEEL WITH STEEL/STAINLESS STEEL HUB AND RIGHT THROUGH THREADED HOLE

Material:

Reinforced polyamide.
Oils and greases resistant.

Surface:

Satin.

Colour:

Black (RAL 9011).

Inserts:


F277 Zinc plated steel insert with female right through threaded hole (tolerance 6H).

F277 PIN: Stainless steel (AISI 303) insert with female right through threaded hole (tolerance 6H).



SPECIAL REQUESTS:

- It's possible to supply the inserts with d1 bore by customer design, on request and for quantities.
- It is possible to supply colours as shown in the table on page F-35, on request and for quantities.

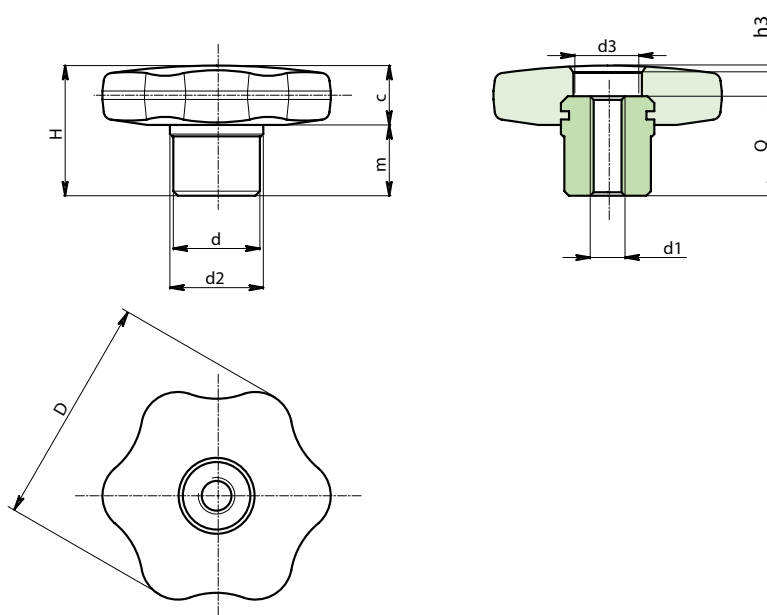

Version F277: Zinc plated steel

	Art.	D	d	d2	d3	H	h3	m	c	d1 6H	Q	g
●	F27730.TM0601	30	13	15	8	22	4	11	11	M06	18	24
●	F27740.TM0801	40	15	17	11	24	6	12	12	M08	18	34
●	F27750.TM1001	50	18	20	13	29	7	15	14	M10	22	59
●	F27760.TM1201	60	20	24	16	34	6	18	16	M12	28	98

Version F277 PIN: Stainless steel AISI 303

	Art.	D	d	d2	d3	H	h3	m	c	d1 6H	Q	g
●	F27730.TM0601PIN	30	13	15	8	22	4	11	11	M06	18	24
●	F27740.TM0801PIN	40	15	17	11	24	6	12	12	M08	18	34
●	F27750.TM1001PIN	50	18	20	13	29	7	15	14	M10	22	59
●	F27760.TM1201PIN	60	20	24	16	34	6	18	16	M12	28	98

INOX

Presumable presence in the stock in %

||||| ROLLMEX ||||| () 90% () 40% () 5% ()

SOLID 6 LOBE HANDWHEEL WITH STEEL/STAINLESS STEEL HUB AND THREADED STUD

F278-F278CIN



Material:

Reinforced polyamide.
Oils and greases resistant.

Surface:

Satin.

Colour:

Black (RAL 9011).

Inserts:


F278: Zinc plated steel insert with male threaded stud (tolerance 6g).

F278 CIN: Stainless steel (AISI 303) insert with male threaded stud (tolerance 6g).

SPECIAL REQUESTS:

It is possible to supply inserts in different lengths or by special design, on request and for quantities.

- It is possible to supply colours as shown in the table on page F-35, on request and for quantities.

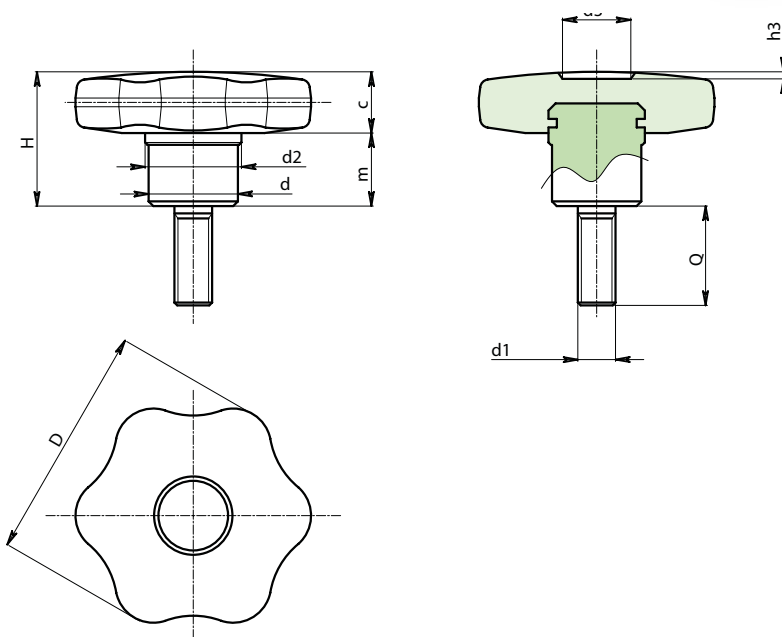

Version F278: Zinc plated steel

	Art.	D	d	d2	H	m	c	d1 6g	Q	LM	g
●	F27830.TM06X..01	30	13	15	22	11	11	M06	A.R.	45	-
●	F27840.TM08X3001	40	15	17	24	12	12	M08	30	55	54
●	F27850.TM10X4001	50	18	20	29	15	14	M10	40	60	96
●	F27860.TM12X..01	60	20	24	34	18	16	M12	A.R.	60	-

LM = Maximum mouldable length.

A.R. = By request. Minimum order quantity 150.

Version F278 CIN: Stainless steel AISI 303

	Art.	D	d	d2	H	m	c	d1 6g	Q	LM	g
●	F27830.TM06X..01CIN	30	13	15	22	11	11	M06	A.R.	35	-
●	F27840.TM08X3001CIN	40	15	17	24	12	12	M08	30	45	54
●	F27850.TM10X..01CIN	50	18	20	29	15	14	M10	A.R.	50	-
●	F27860.TM12X..01CIN	60	20	24	34	18	16	M12	A.R.	50	-

LM = Maximum mouldable length.

A.R. = By request. Minimum order quantity 150.

Presumable presence in the stock in %

() 90% () 40% () 5% ()

ROLLMEX

F186



PA6
+GF

UL94
HB



SOLID CROSS HANDWHEEL WITH FEMALE THREADED INSERT

Material:

Reinforced polyamide.
Oils and greases resistant.

Surface:

Satin.

Colour:


Black (RAL 9011).

Main Insert:

Brass blind threaded bush (tolerance 6H).

SPECIAL REQUEST:

- It is possible to supply the inserts in different materials, on request and for quantities.
- It is possible to supply colours as shown in the table at pag. F-35, on request and for quantities.

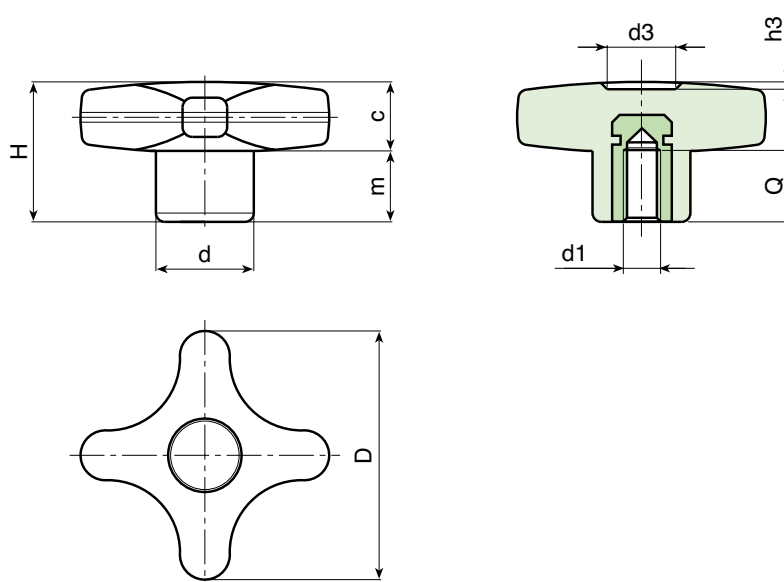

	Art.	D	H	d	c	m	d3	h3	d1 6H	Q	g
●	F18632.TM0401	32	23	15	11	12	11	1,5	M04	7	11
●	F18632.TM0501	32	23	15	11	12	11	1,5	M05	14	11,5
●	F18632.TM0601	32	23	15	11	12	11	1,5	M06	10	12
●	F18632.TM0801	32	23	15	11	12	11	1,5	M08	14	12,5
●	F18632.TM1001	32	23	15	11	12	11	1,5	M10	14	13
●	F18640.TM0501	40	24,5	16	12	12,5	13	1,5	M05	14	14
●	F18640.TM0601	40	24,5	16	12	12,5	13	1,5	M06	16	15
●	F18640.TM0801	40	24,5	16	12	12,5	13	1,5	M08	14	16
●	F18640.TM1001	40	24,5	16	12	12,5	13	1,5	M10	14	17
●	F18650.TM0601	50	29	20	14	15	14	2	M06	16	25
●	F18650.TM0801	50	29	20	14	15	14	2	M08	14	26
●	F18650.TM1001	50	29	20	14	15	14	2	M10	14	27
●	F18650.TM1201	50	29	20	14	15	14	2	M12	18	29
●	F18660.TM0801	60	34	24	15,5	18,5	18	2	M08	19	40
●	F18660.TM1001	60	34	24	15,5	18,5	18	2	M10	21	43
●	F18660.TM1201	60	34	24	15,5	18,5	18	2	M12	18	44
●	F18660.TM1401	60	34	24	15,5	18,5	18	2	M14	19	47

Presumable presence in the stock in %

||||| ||||| () 90% () 40% () 5%

SOLID CROSS HANDWHEEL WITH FEMALE THREADED STAINLESS STEEL INSERT

F186 CIN



INOX

Material:

Reinforced polyamide.
Oils and greases resistant.

Surface:

Satin.

Colour:


Black (RAL 9011).

Main Insert:

Stainless steel blind threaded bush (AISI 303)
(tolerance 6H).

SPECIAL REQUEST:

- It is possible to supply colours as shown in the table at pag. F-35, on request and for quantities.

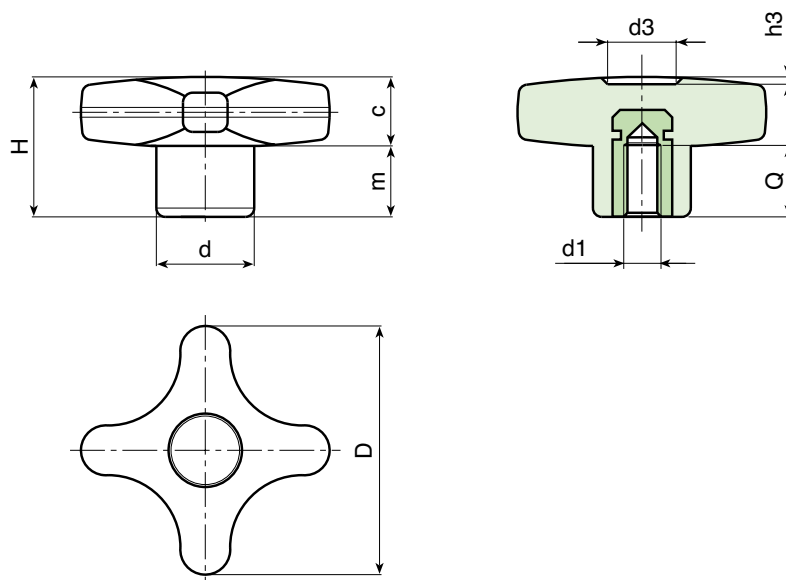

	Art.	D	H	d	c	m	d3	h3	d1 6H	Q	△ g
●	F18632.TM0501CIN	32	23	15	11	12	11	1,5	M05	14	11,5
●	F18632.TM0601CIN	32	23	15	11	12	11	1,5	M06	10	12
●	F18632.TM0801CIN	32	23	15	11	12	11	1,5	M08	14	12,5
●	F18640.TM0601CIN	40	24,5	16	12	12,5	13	1,5	M06	16	15
●	F18640.TM0801CIN	40	24,5	16	12	12,5	13	1,5	M08	14	16
●	F18640.TM1001CIN	40	24,5	16	12	12,5	13	1,5	M10	14	17
●	F18650.TM0801CIN	50	29	20	14	15	14	2	M08	14	26
●	F18650.TM1001CIN	50	29	20	14	15	14	2	M10	14	27
●	F18650.TM1201CIN	50	29	20	14	15	14	2	M12	18	29
●	F18660.TM0801CIN	60	34	24	15,5	18,5	18	2	M08	19	40
●	F18660.TM1001CIN	60	34	24	15,5	18,5	18	2	M10	21	43
●	F18660.TM1201CIN	60	34	24	15,5	18,5	18	2	M12	18	44

Presumable presence in the stock in %

() 90% (●) 40% (●) 5% (●) | **ROLLMEX** |

F187



PA6
+GF

UL94
HB



SOLID CROSS HANDWHEEL WITH SMOOTH BORED INSERT

Material:

Reinforced polyamide.
Oils and greases resistant.

Surface:

Satin.

Colour:

Black (RAL 9011).

Main Insert:


Brass insert with smooth blind hole (tolerance H7).

(*) Zinc plated steel insert with smooth blind hole
(tolerance H10).

ATTENTION: bore cannot be enlarged.

SPECIAL REQUEST:

- It is possible to supply the inserts in different materials, on request and for quantities.
- It is possible to supply colours as shown in the table at pag. F-35, on request and for quantities.

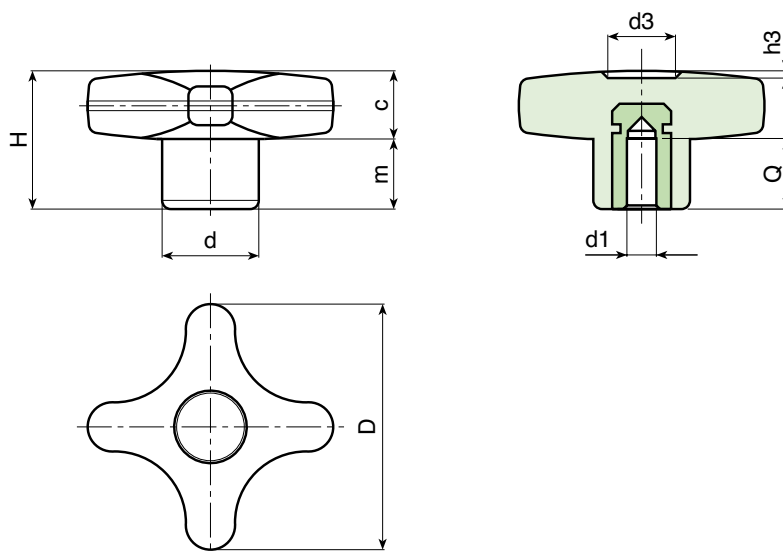

	Art.	D	H	d	c	m	d3	h3	d1 H7	Q	g
●	F18732.TD0601	32	23	15	11	12	11	1,5	06	15	13
●	F18732.TD0801	32	23	15	11	12	11	1,5	08	15	14
●	F18740.TD0601	40	24,5	16	12	12,5	13	1,5	06	15	18
●	F18740.TD0801	40	24,5	16	12	12,5	13	1,5	08	15	21
●	F18740.TD1001	40	24,5	16	12	12,5	13	1,5	10	17	20
●	F18750.TD0601	50	29	20	14	15	14	2	06	15	29
●	F18750.TD0801	50	29	20	14	15	14	2	08	15	31
●	F18750.TD1001	50	29	20	14	15	14	2	10	17	32
●	F18760.TD0801	60	34	24	15,5	18,5	18	2	08	18	70
●	F18760.TD1001	60	34	24	15,5	18,5	18	2	10	25	65
●	F18760.TD1201	60	34	24	15,5	18,5	18	2	12	22	60

Presumable presence in the stock in %

() 90% (●) 40% (●) 5% (●)

ROLLMEX

SOLID CROSS HANDWHEEL WITH FEMALE RIGHT THROUGH THREADED INSERT

F188



Material:

Reinforced polyamide.
Oils and greases resistant.

Surface:

Satin.

Colour:


Black (RAL 9011).

Main Insert:

Brass right through threaded bush (tolerance 6H).

SPECIAL REQUEST:

- It is possible to supply the inserts in different materials, on request and for quantities.
- It is possible to supply colours as shown in the table at pag. F-35, on request and for quantities.

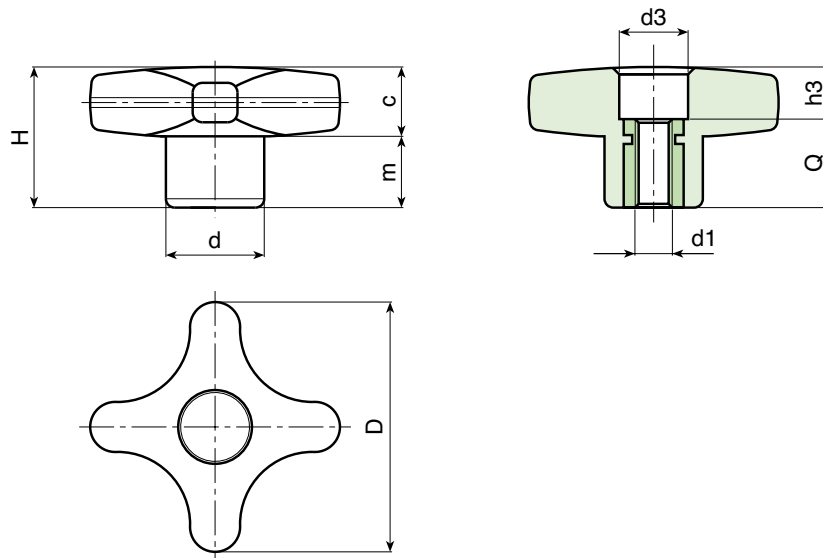

	Art.	D	H	d	c	m	d3	h3	d1 6H	Q	Δ g
●	F18832.TM0401	32	23	15	11	11	10	5	M04	18	9
●	F18832.TM0501	32	23	15	11	11	10	5	M05	18	10
●	F18832.TM0601	32	23	15	11	11	10	5	M06	18	10,5
●	F18832.TM0801	32	23	15	11	11	10	5	M08	18	11
●	F18840.TM0601	40	24,5	16	12	12,5	12	6,5	M06	18	13
●	F18840.TM0801	40	24,5	16	12	12,5	12	6,5	M08	18	15
●	F18840.TM1001	40	24,5	16	12	12,5	12	6,5	M10	18	16
●	F18850.TM0601	50	29	20	14	15	14	11	M06	18	23
●	F18850.TM0801	50	29	20	14	15	14	11	M08	18	24
●	F18850.TM1001	50	29	20	14	15	14	11	M10	18	25
●	F18850.TM1201	50	29	20	14	15	14	11	M12	18	26
●	F18860.TM0801	60	34	24	15,5	18,5	16	16	M08	18	34
●	F18860.TM1001	60	34	24	15,5	18,5	16	16	M10	18	38
●	F18860.TM1201	60	34	24	15,5	18,5	16	16	M12	18	40
●	F18860.TM1401	60	34	24	15,5	18,5	16	16	M14	18	45

Presumable presence in the stock in %

() 90% (●) 40% (●) 5% (●) ||||| ROLLMEX |||||

F188 PIN



SOLID CROSS HANDWHEEL WITH FEMALE RIGHT THROUGH THREADED STAINLESS STEEL INSERT

INOX

Material:

Reinforced polyamide.
Oils and greases resistant.

Surface:

Satin.

Colour:


Black (RAL 9011).

Main Insert:

Stainless steel right through threaded bush (AISI 303)
(tolerance 6H).

SPECIAL REQUEST:

- It is possible to supply colours as shown in the table at pag. F-35, on request and for quantities.

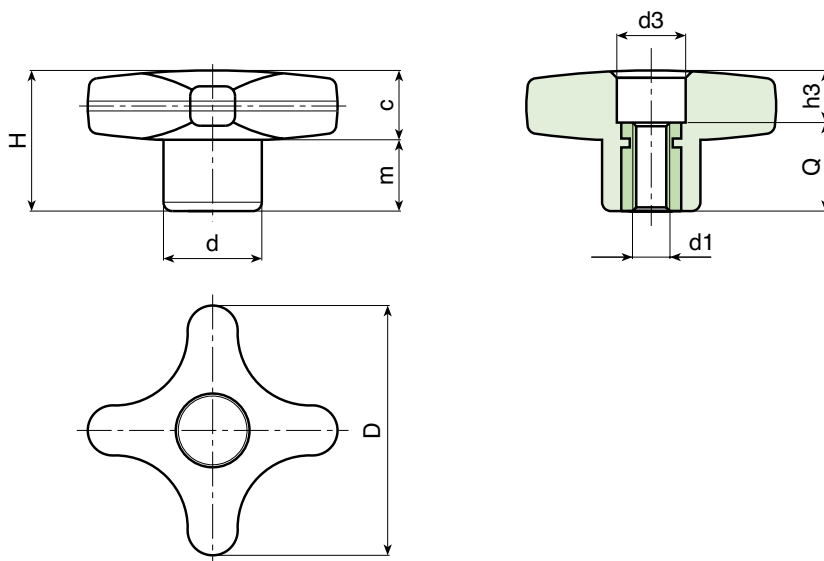

	Art.	D	H	d	c	m	d3	h3	d1 6H	Q	g
●	F18832.TM0501PIN	32	23	15	11	11	10	5	M05	18	10
●	F18832.TM0601PIN	32	23	15	11	11	10	5	M06	18	10,5
●	F18832.TM0801PIN	32	23	15	11	11	10	5	M08	18	11
●	F18840.TM0601PIN	40	24,5	16	12	12,5	12	6,5	M06	18	13
●	F18840.TM0801PIN	40	24,5	16	12	12,5	12	6,5	M08	18	15
●	F18840.TM1001PIN	40	24,5	16	12	12,5	12	6,5	M10	18	16
●	F18850.TM0801PIN	50	29	20	14	15	14	11	M08	18	24
●	F18850.TM1001PIN	50	29	20	14	15	14	11	M10	18	25
●	F18850.TM1201PIN	50	29	20	14	15	14	11	M12	18	26
●	F18860.TM0801PIN	60	34	24	15,5	18,5	16	16	M08	18	34
●	F18860.TM1001PIN	60	34	24	15,5	18,5	16	16	M10	18	38
●	F18860.TM1201PIN	60	34	24	15,5	18,5	16	16	M12	18	40

Presumable presence in the stock in %

() 90% (●) 40% (●) 5% (●)

ROLLMEX

SOLID CROSS HANDWHEEL WITH THREADED STUD

F189



Material:

Reinforced polyamide.
Oils and greases resistant.

Surface:

Satin.

Colour:


Black (RAL 9011).

Main Insert:

Zinc plated steel threaded stud (tolerance 6g).

SPECIAL REQUESTS:

- It is possible to supply inserts in different lengths or by special design, on request and for quantities.
- It is possible to supply inserts in different materials, on request and for quantities.
- It is possible to supply colours as shown in the table on page F-35, on request and for quantities.

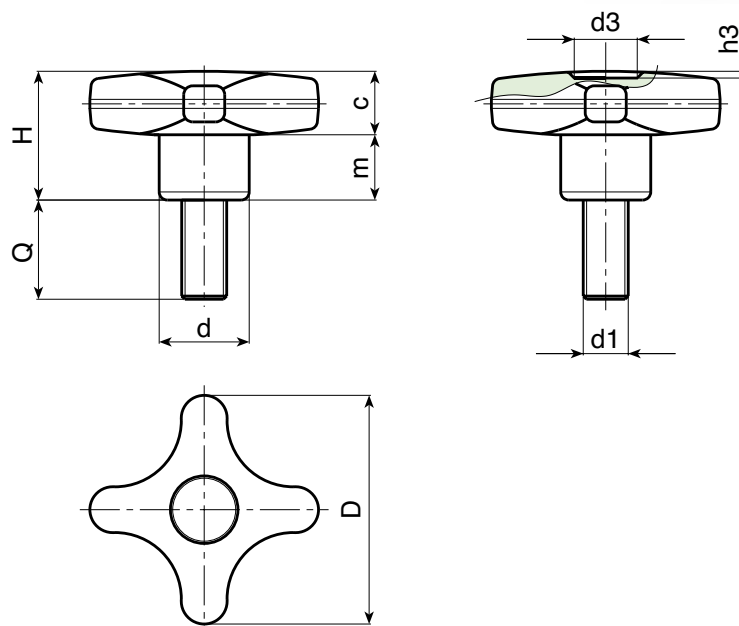

Art.	D	H	d	c	m	d3	h3	LM	d1 6g	Q	Δ g
F18932.TM05X..01	32	23	15	11	11	9	1,5	80	M05	16-20-30	14-15-16
F18932.TM06X..01	32	23	15	11	11	9	1,5	80	M06	16-20-30	15-16-17
F18932.TM08X..01	32	23	15	11	11	9	1,5	80	M08	16-20-30-40	19-21-23-25
F18932.TM10X..01	32	23	15	11	11	9	1,5	80	M10	20-30-40	24-27-30
F18940.TM06X..01	40	24,5	17	12	12,5	12	1	80	M06	15-20-30-40-50	20-20-21-22-25
F18940.TM08X..01	40	24,5	17	12	12,5	12	1	80	M08	16-20-30-40-50	22-24-29-33-37
F18940.TM10X..01	40	24,5	17	12	12,5	12	1	80	M10	15-20-30-50	28,5-30-35-47
F18950.TM08X..01	50	29	20	14	15	14,5	1,5	80	M08	15-20-30-40	36-38-42-46
F18950.TM10X..01	50	29	20	14	15	14,5	1,5	80	M10	20-30-40-50	49-55-61-65
F18950.TM12X..01	50	29	20	14	15	14,5	1,5	80	M12	30-50	57-70
F18960.TM08X..01	60	34	24	15,5	18,5	18	1,5	80	M08	15-20-30-40	45,5-47-50-53
F18960.TM10X..01	60	34	24	15,5	18,5	18	1,5	80	M10	20-30-40-50	64-68-72
F18960.TM12X..01	60	34	24	15,5	18,5	18	1,5	80	M12	20-30-40-50	78-85-91-99
F18960.TM14X..01	60	34	24	15,5	18,5	18	1,5	80	M14	30-40-50	82-91-103

Enter the stud length choice in the two .. of the article code. Lengths by request with 150 pieces minimum quantity.

LM = Maximum mouldable length.

Presumable presence in the stock in %

() 90% () 40% () 5% ()

ROLLMEX

F189 CIN



SOLID CROSS HANDWHEEL WITH THREADED STAINLESS STEEL STUD

INOX

Material:

Reinforced polyamide.
Oils and greases resistant.

Surface:

Satin.

Colour:


Black (RAL 9011).

Main Insert:

Stainless steel threaded stud (AISI 304) (tolerance 6g).

SPECIAL REQUESTS:

- It is possible to supply inserts in different lengths or by special design, on request and for quantities.
- It is possible to supply colours as shown in the table on page F-35, on request and for quantities.

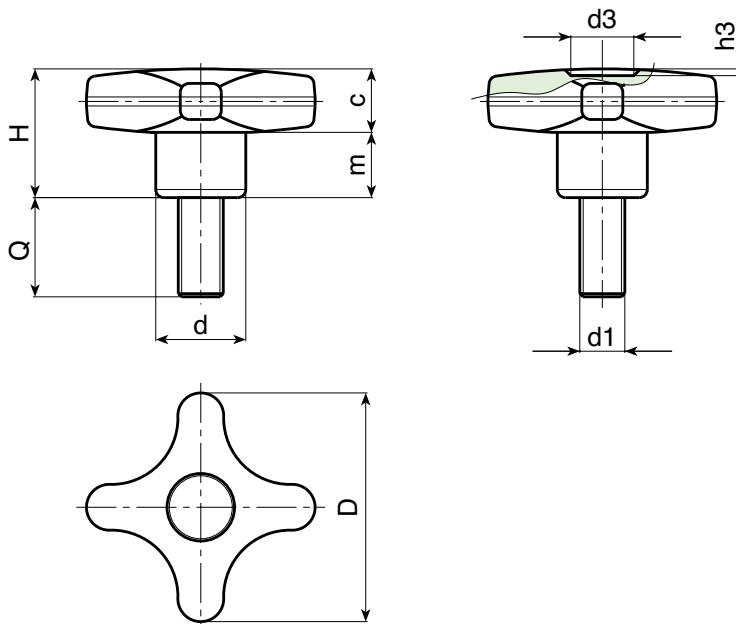

Art.	D	H	d	c	m	d3	h3	LM	d1 6g	Q	g
F18932.TM05X..01CIN	32	23	15	11	11	9	1,5	80	M05	20-40	15-17
F18932.TM06X..01CIN	32	23	15	11	11	9	1,5	80	M06	16-20-30	15-16-17
F18932.TM08X..01CIN	32	23	15	11	11	9	1,5	80	M08	16-20-30	19-21-23
F18932.TM10X2001CIN	32	23	15	11	11	9	1,5	80	M10	20	24
F18940.TM06X..01CIN	40	24,5	17	12	12,5	12	1	80	M06	15-20-40	19,5-20-22
F18940.TM08X..01CIN	40	24,5	17	12	12,5	12	1	80	M08	16-20-30-40	22-24-29-33
F18940.TM10X..01CIN	40	24,5	17	12	12,5	12	1	80	M10	A.R.	-
F18950.TM08X3501CIN	50	29	20	14	15	14,5	1,5	80	M08	35	44
F18950.TM10X..01CIN	50	29	20	14	15	14,5	1,5	80	M10	20-30-40	49-55-61
F18950.TM12X..01CIN	50	29	20	14	15	14,5	1,5	80	M12	A.R.	-
F18960.TM08X..01CIN	60	34	24	15,5	18,5	18	1,5	80	M08	A.R.	-
F18960.TM10X..01CIN	60	34	24	15,5	18,5	18	1,5	80	M10	50	72
F18960.TM12X..01CIN	60	34	24	15,5	18,5	18	1,5	80	M12	40-60	91-103
F18960.TM14X..01CIN	60	34	24	15,5	18,5	18	1,5	80	M14	A.R.	-

Enter the stud length choice in the two .. of the article code. Lengths by request with 150 pieces minimum quantity.

LM = Maximum mouldable length.

A.R. = By request. Minimum order quantity 150 pcs.

Presumable presence in the stock in %

||||| **ROLLMEX** ||||| () 90% () 40% () 5% ()

SOLID CROSS HANDWHEEL WITH STEEL HUB AND QUICK RELEASE THREADED BORE

F271-F271PIN



Material:

Reinforced polyamide.
Oils and greases resistant.

Surface:

Satin.

Colour:

Black (RAL 9011).

Inserts:

F271 Zinc plated steel insert with female right through threaded hole with groove for quick release.


F271 PIN: Stainless steel (AISI 303) insert with female right through threaded hole with groove for quick release.

SPECIAL REQUESTS:

- None.

ATTENTION:

TO GUARANTEE CORRECT OPERATION OF THE QUICK RELEASE HANDWHEEL, THE THREADED STUD MUST HAVE A MINIMUM LENGTH OF Q2.

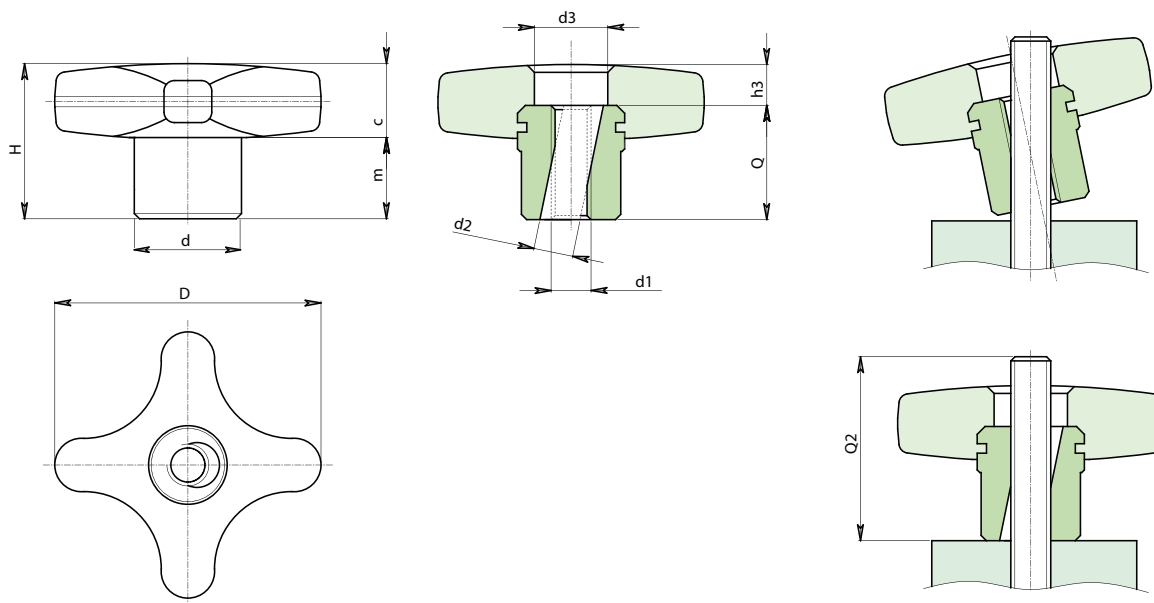

Version F271: Zinc plated steel

	Art.	D	d	d2	d3	H	h3	m	c	d1	Q	Q2	g
●	F27140.TM0801P	40	16	8,5	14	26	4	14	12	M08	22	35	31
●	F27150.TM1001P	50	20	10,5	18	34	4	20	14	M10	30	43	63

Version F271 PIN: Stainless steel AISI 303

INDEX

	Art.	D	d	d2	d3	H	h3	m	c	d1	Q	Q2	g
●	F27140.TM0801PIN	40	16	8,5	14	26	4	14	12	M08	22	35	31
●	F27150.TM1001PIN	50	20	10,5	18	34	4	20	14	M10	30	43	63

Presumable presence in the stock in %

() 90% (●) 40% (●) 5% (●) | **ROLLMEX** |

F269



PA6
+GF

UL94
HB



HIGH CLAMPING SOLID CROSS HANDWHEEL WITH THREADED INSERT

Material:

Reinforced polyamide.
Oils and greases resistant.

Surface:

Satin.

Colour:

Black (RAL 9011).

Insert:




Nickel plated brass hexagonal insert with female blind threaded hole (thread tolerance 6H).

SPECIAL REQUESTS:

- It is possible to supply colours as shown in the table on page F-35, on request and for quantities.

ATTENTION:

FOR NORMAL TIGHTNESS SIMPLY ROTATE THE KNOB. FOR MORE TIGHTNESS, INSERT AN ALLEN WRENCH IN THE HEXAGON.

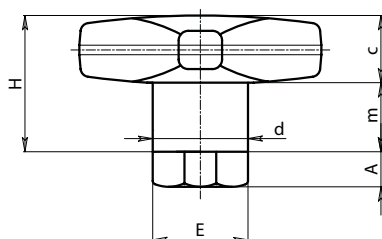

	Art.	D	d	H	Ht	A	E	m	c	d1 6H	Q	g
●	F26950.TM0601	50	18	29	39	10	17	15	14	M06	25	72
●	F26950.TM0801	50	18	29	39	10	17	15	14	M08	25	67
●	F26950.TM1001	50	18	29	39	10	17	15	14	M10	25	60

Presumable presence in the stock in %

() 90% (●) 40% (●) 5% (●)

ROLLMEX

HIGH CLAMPING SOLID CROSS HANDWHEEL WITH THREADED STUD

F270



PA6
+GF

UL94
HB



Material:

Reinforced polyamide.
Oils and greases resistant.

Surface:

Satin.

Colour:

Black (RAL 9011).

Insert:




Nickel plated brass hexagonal insert with male threaded stud (thread tolerance 6g).

SPECIAL REQUESTS:

- It is possible to supply inserts in different lengths or by special design, on request and for quantities.
- It is possible to supply colours as shown in the table on page F-35, on request and for quantities.

ATTENTION:

FOR NORMAL TIGHTNESS SIMPLY ROTATE THE KNOB. FOR MORE TIGHTNESS, INSERT AN ALLEN WRENCH IN THE HEXAGON.

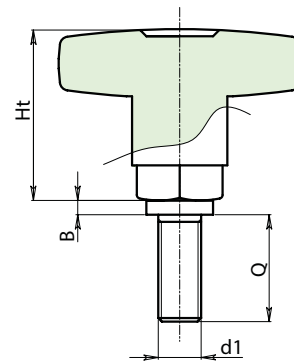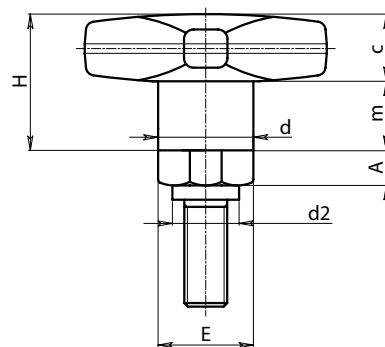

Art.	D	d	d2	H	Ht	A	B	E	m	c	d1 6g	Q	g
F27050.TM10X2501	50	18	15	24	34	10	4	17	15	14	M10	25	97

Presumable presence in the stock in %

() 90% () 40% () 5% ()

ROLLMEX

F286-F286CIN



PA6
+GF

UL94
HB



SOLID CROSS HANDWHEEL WITH STEEL/STAINLESS STEEL HUB AND THREADED HOLE

Material:

Reinforced polyamide.
Oils and greases resistant.

Surface:

Satin.

Colour:

Black (RAL 9011).




Inserts:

F286: Zinc plated steel insert with female blind threaded hole (thread tolerance 6H).

F286 CIN: Stainless steel (AISI 303) insert with female blind threaded hole (thread tolerance 6H).

SPECIAL REQUESTS:

- It's possible to supply the inserts with d1 bore by customer design, on request and for quantities.
- It is possible to supply colours as shown in the table on page F-35, on request and for quantities.

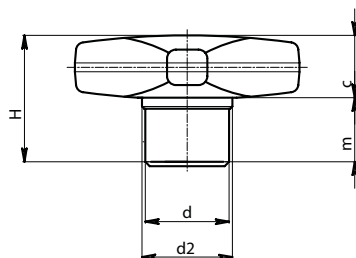

Version F286: Zinc plated steel

	Art.	D	d	d2	H	m	c	d1 6H	Q	g
●	F28632.TM0601	32	13	15	22	11	11	M06	12	23
●	F28640.TM0801	40	14	16	24	12	12	M08	14	32
●	F28650.TM1001	50	18	20	29	15	14	M10	16	54
●	F28660.TM1201	60	20	24	34	18	16	M12	20	90

Version F286 CIN: Stainless steel AISI 303

	Art.	D	d	d2	H	m	c	d1 6H	Q	g
●	F28632.TM0601CIN	32	13	15	22	11	11	M06	12	23
●	F28640.TM0801CIN	40	14	16	24	12	12	M08	14	32
●	F28650.TM1001CIN	50	18	20	29	15	14	M10	16	54
●	F28660.TM1201CIN	60	20	24	34	18	16	M12	20	90

INOX

Presumable presence in the stock in %

||||| ||||| () 90% () 40% () 5% ()

SOLID CROSS HANDWHEEL WITH STEEL/STAINLESS STEEL HUB AND BORED HOLE

F287-F287CIN



Material:

Reinforced polyamide.
Oils and greases resistant.

Surface:

Satin.

Colour:

Black (RAL 9011).

Inserts:


F287: Zinc plated steel insert with female blind smooth hole (tolerance H10).

F287 CIN: Stainless steel (AISI 303) insert with female blind smooth hole (tolerance H9).



SPECIAL REQUESTS:

- It's possible to supply the inserts with d1 bore by customer design, on request and for quantities.
- It is possible to supply colours as shown in the table on page F-35, on request and for quantities.

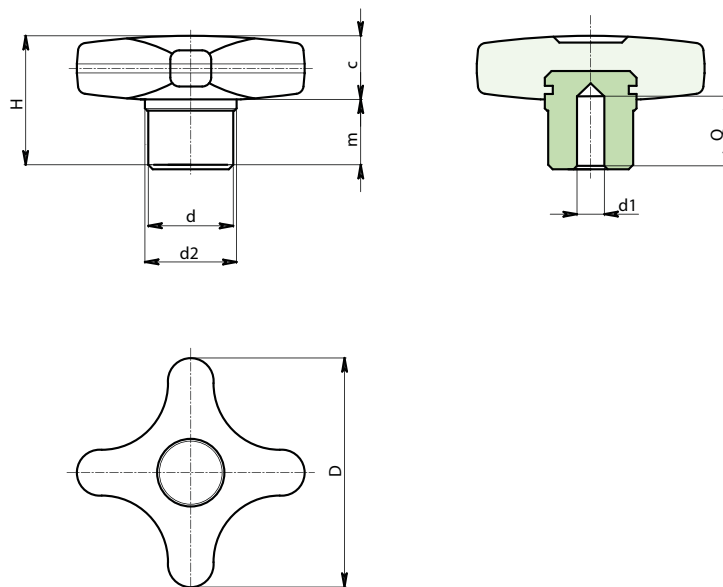

Version F287: Zinc plated steel

	Art.	D	d	d2	H	m	c	d1 H9	Q	g
●	F28732.TD0601	32	13	15	22	11	11	06	12	24
●	F28740.TD0801	40	14	16	24	12	12	08	14	35
●	F28750.TD1001	50	18	20	29	15	14	10	16	57
●	F28760.TD1201	60	20	24	34	18	16	12	20	85

Version F287 CIN: Stainless steel AISI 303

INOX

	Art.	D	d	d2	H	m	c	d1 H9	Q	g
●	F28732.TD0601CIN	32	13	15	22	11	11	06	12	24
●	F28740.TD0801CIN	40	14	16	24	12	12	08	14	35
●	F28750.TD1001CIN	50	18	20	29	15	14	10	16	57
●	F28760.TD1201CIN	60	20	24	34	18	16	12	20	85

Presumable presence in the stock in %

() 90% (●) 40% (●) 5% (●) | **ROLLMEX** |

F288-F288PIN



PA6
+GF

UL94
HB



SOLID CROSS HANDWHEEL WITH STEEL/STAINLESS STEEL HUB AND RIGHT THROUGH THREADED HOLE

Material:

Reinforced polyamide.
Oils and greases resistant.

Surface:

Satin.

Colour:

Black (RAL 9011).

Inserts:


F288 Zinc plated steel insert with female right through threaded hole (tolerance 6H).

F288 PIN: Stainless steel (AISI 303) insert with female right through threaded hole (tolerance 6H).



SPECIAL REQUESTS:

- It's possible to supply the inserts with d1 bore by customer design, on request and for quantities.
- It is possible to supply colours as shown in the table on page F-35, on request and for quantities.

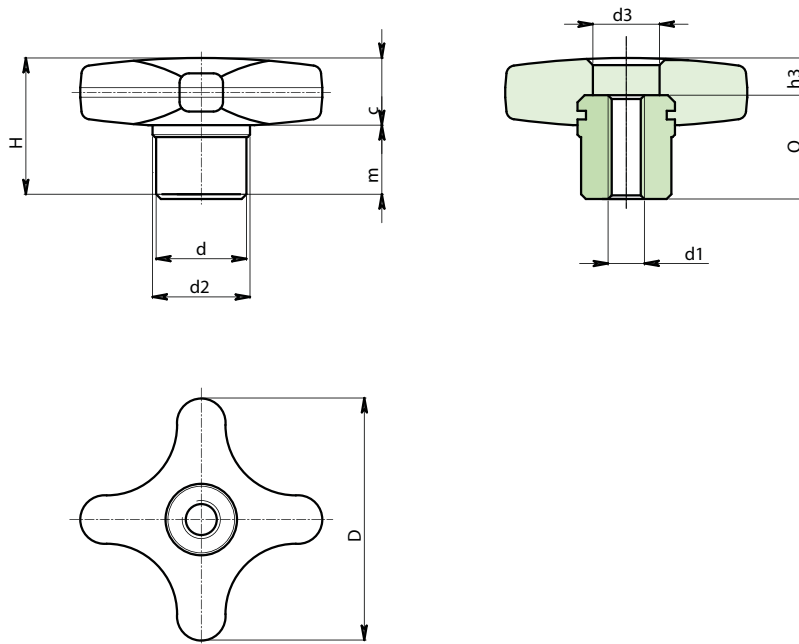

Version F288: Zinc plated steel

	Art.	D	d	d2	d3	H	h3	m	c	d1 6H	Q	g
●	F28832.TM0601	32	13	15	8	22	4	11	11	M06	18	21
●	F28840.TM0801	40	14	16	11	24	6	12	12	M08	18	28
●	F28850.TM1001	50	18	20	14	29	7	15	14	M10	22	49
●	F28860.TM1201	60	20	24	16	34	6	18	16	M12	28	81

Version F288 PIN: Stainless steel AISI 303

	Art.	D	d	d2	d3	H	h3	m	c	d1 6H	Q	g
●	F28832.TM0601PIN	32	13	15	8	22	4	11	11	M06	18	21
●	F28840.TM0801PIN	40	14	16	11	24	6	12	12	M08	18	28
●	F28850.TM1001PIN	50	18	20	14	29	7	15	14	M10	22	49
●	F28860.TM1201PIN	60	20	24	16	34	6	18	16	M12	28	81

INDEX

Presumable presence in the stock in %

||||| () 90% () 40% () 5% ()

ROLLMEX

SOLID CROSS HANDWHEEL WITH STEEL/STAINLESS STEEL HUB AND THREADED STUD

F289-F289CIN



Material:

Reinforced polyamide.
Oils and greases resistant.

Surface:

Satin.

Colour:

Black (RAL 9011).

Inserts:




F289: Zinc plated steel insert with male threaded stud (tolerance 6g).

F289 CIN: Stainless steel (AISI 303) insert with male threaded stud (tolerance 6g).

SPECIAL REQUESTS:

It is possible to supply inserts in different lengths or by special design, on request and for quantities.

- It is possible to supply colours as shown in the table on page F-35, on request and for quantities.



Version F289: Zinc plated steel

	Art.	D	d	d2	H	m	c	d1 6g	Q	LM	g
●	F28932.TM06X..01	32	13	15	22	11	11	M06	A.R.	45	-
●	F28940.TM08X..01	40	14	16	24	12	12	M08	A.R.	55	-
●	F28950.TM10X..01	50	18	20	29	15	14	M10	A.R.	60	-
●	F28960.TM12X..01	60	20	24	34	18	16	M12	A.R.	60	-

Enter the stud length choice in the two .. of the article code.

LM = Maximum mouldable length.

A.R. = By request. Minimum order quantity 150 pcs.

Version F289 CIN: Stainless steel AISI 303

	Art.	D	d	d2	H	m	c	d1 6g	Q	LM	g
●	F28932.TM06X..01CIN	32	13	15	22	11	11	M06	A.R.	35	-
●	F28940.TM08X..01CIN	40	14	16	24	12	12	M08	A.R.	45	-
●	F28950.TM10X..01CIN	50	18	20	29	15	14	M10	A.R.	50	-
●	F28960.TM12X..01CIN	60	20	24	34	18	16	M12	A.R.	50	-

Enter the stud length choice in the two .. of the article code.

LM = Maximum mouldable length.

A.R. = By request. Minimum order quantity 150 pcs.

Presumable presence in the stock in %

() 90% () 40% () 5% ()

ROLLMEX

F661-F761



SOLID 3 LOBE HANDWHEEL WITH FEMALE THREADED INSERT

Material:

Reinforced polyamide. Oils and greases resistant.

Surface: Satin.

Colour: Black (RAL 9011).

Main Insert:

Brass blind threaded bush (tolerance 6H).

(*) Zinc plated steel blind threaded bush (tolerance 6H).



Hub:

F661= Solid version.

F761= Hollow underneath version.

SPECIAL REQUESTS:

- It is possible to supply the inserts in different materials, on request and for quantities.
- It is possible to supply colours as shown in the table on page F-35, on request and for quantities.

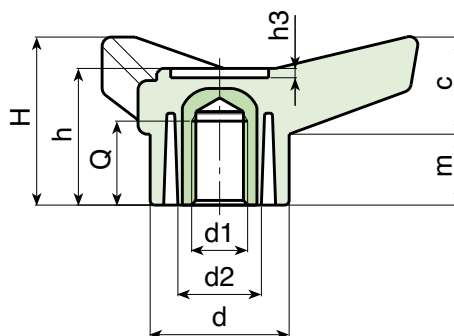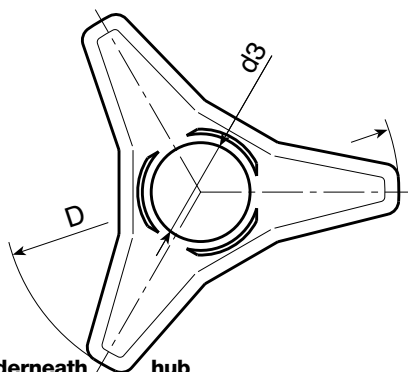

Version F761: Hollow underneath hub

	Art.	D	H	h	d	c	m	d2	d3	h3	d1 6H	Q	Δ g
●	F761085.TM0801	85	37	30,5	30	21	16	18/-	21	2	M08	15	53
●	F761085.TM1001	85	37	30,5	30	21	16	18/-	21	2	M10	14	55
●	F761085.TM1201	85	37	30,5	30	21	16	18/-	21	2	M12	19	60
●	F761105.TM0801	105	46	37,5	35	26	19	20/-	25	2	M08	15	89
●	F761105.TM1001	105	46	37,5	35	26	19	20/-	25	2	M10	17	90
●	F761105.TM1201	105	46	37,5	35	26	19	20/-	25	2	M12	17	97
●	F761105.TM1401	105	46	37,5	35	26	19	20/-	25	2	M14	19	98
●	F761125.TM1201	125	54	44	42,5	31	23	26/-	28,5	2	M12	18	160
●	F761125.TM1401	125	54	44	42,5	31	23	26/-	28,5	2	M14	18	165

Version F661: Solid hub

	Art.	D	H	h	d	c	m	d2	d3	h3	d1 6H	Q	Δ g
●	F661045.TM0601	45	21	18	16	11	10	-/-	11	1	M06	9	10
●	F661045.TM0801	45	21	18	16	11	10	-/-	11	1	M08	11	14
●	F661045.TM1001	45	21	18	16	11	10	-/-	11	1	M10	10	15
●	F661065.TM0801	65	28	23,5	22	16,5	11,5	-/-	15,5	1,5	M08	11	28
●	F661065.TM1001	65	28	23,5	22	16,5	11,5	-/-	15,5	1,5	M10	11	29
●	F661065.TM1201	65	28	23,5	22	16,5	11,5	-/-	15,5	1,5	M12	13	31
●	F661085.TM0801	85	37	30,5	30	21	16	18/-	21	2	M08	15	53
●	F661085.TM1001	85	37	30,5	30	21	16	18/-	21	2	M10	14	55
●	F661085.TM1201	85	37	30,5	30	21	16	18/-	21	2	M12	19	60
●	F661105.TM0801	105	46	37,5	35	26	19	20/-	25	2	M08	15	89
●	F661105.TM1001	105	46	37,5	35	26	19	20/-	25	2	M10	17	90
●	F661105.TM1201	105	46	37,5	35	26	19	20/-	25	2	M12	17	97
●	F661105.TM1401	105	46	37,5	35	26	19	20/-	25	2	M14	19	98
●	F661125.TM1201	125	54	44	42,5	31	23	26/-	28,5	2	M12	18	160
●	F661125.TM1401	125	54	44	42,5	31	23	26/-	28,5	2	M14	18	165
●	F661125.TM1601	125	54	44	42,5	31	23	-/-	28,5	2	(*) M16	21	177
●	F661125.TM1801	125	54	44	42,5	31	23	-/-	28,5	2	(*) M18	21	182

Presumable presence in the stock in %

||||| **ROLLMEX** ||||| (■) 90% (●) 40% (●) 5% (●)

SOLID 3 LOBE HANDWHEEL WITH FEMALE BORED INSERT

F662



Material:

Reinforced polyamide.
Oils and greases resistant.

Surface:

Satin.

Colour:



Black (RAL 9011).

Main Insert:

Zinc plated steel bush with smooth hole
(bore tolerance H10).

SPECIAL REQUESTS:

- It's possible to supply the inserts with d1 bore by customer design, on request and for quantities.
- It is possible to supply the inserts in different materials, on request and for quantities.
- It is possible to supply colours as shown in the table on page F-35, on request and for quantities.

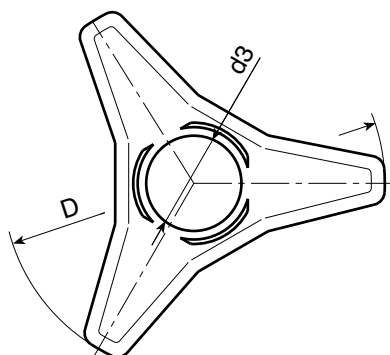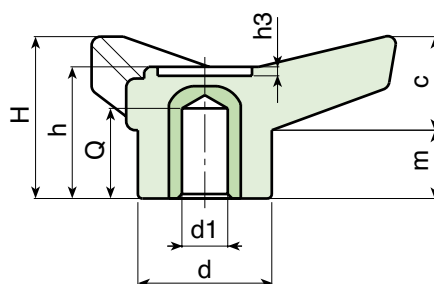

	Art.	D	H	h	d	c	m	d3	h3	dm	d1 H10	Q	g
●	F662045.TD0601	45	21	18	16	11	10	11	1	-	06	8	14
●	F662065.TD0501	65	28	23,5	22	16,5	11,5	15,5	1,5	10	05	13	36
●	F662065.TD1001	65	28	23,5	22	16,5	11,5	15,5	1,5	10	10	13	34
●	F662085.TD0501	85	37	30,5	30	21	16	21	2	16	05	19	72
●	F662085.TD1001	85	37	30,5	30	21	16	21	2	16	10	19	70
●	F662085.TD1201	85	37	30,5	30	21	16	21	2	16	12	19	69
●	F662085.TD1401	85	37	30,5	30	21	16	21	2	16	14	19	65
●	F662105.TD0501	105	46	37,5	35	26	19	25	2	18	05	24	100
●	F662105.TD1201	105	46	37,5	35	26	19	25	2	18	12	24	98
●	F662105.TD1401	105	46	37,5	35	26	19	25	2	18	14	24	95
●	F662105.TD1601	105	46	37,5	35	26	19	25	2	18	16	24	90
●	F662125.TD0801	125	54	44	42,5	31	23	28	2	22	08	26	192

Attention: bore d1 (H10 tolerance) could be produced by request, with 50 pieces minimum.

Dm = It's possible to increase the hole, by boring, until Dm (enlarge).

Presumable presence in the stock in %

() 90% (●) 40% (●) 5% (●)



F663-F763



SOLID 3 LOBE HANDWHEEL WITH FEMALE RIGH THROUGH THREADED INSERT

Material:

Reinforced polyamide. Oils and greases resistant.

Surface: Satin.

Colour: Black (RAL 9011).

Main Insert:

Brass right through threaded bush (tolerance 6H).

(*) Zinc plated steel insert with right through threaded bore. (thred tolerance 6H).



Hub:

F663= Solid version.

F763= Hollow underneath version.

SPECIAL REQUESTS:

- It is possible to supply the inserts in different materials, on request and for quantities.
- It is possible to supply colours as shown in the table on page F-35, on request and for quantities.

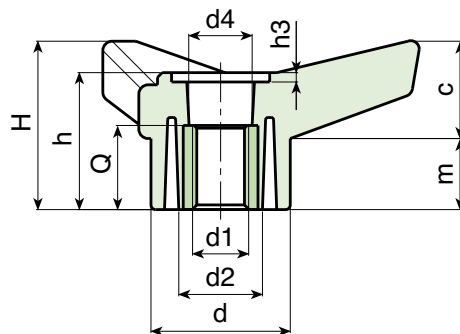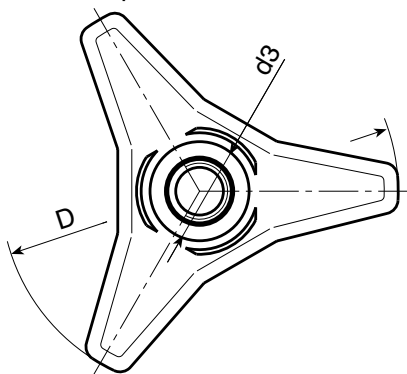

Version F763: Hollow underneath

hub

	Art.	D	H	h	d	c	m	d2	d3	d4	h3	d1 6H	Q	g
●	F763085.TM0801	85	37	30,5	30	21	16	18/-	21	13	2	M08	13,5	50
●	F763085.TM1001	85	37	30,5	30	21	16	18/-	21	13	2	M10	13,5	52
●	F763085.TM1201	85	37	30,5	30	21	16	18/-	21	13	2	M12	13,5	52
●	F763105.TM1001	105	46	37,5	35	26	19	20/-	25	23,5	2	M10	23	88
●	F763105.TM1201	105	46	37,5	35	26	19	20/-	25	23,5	2	M12	23	88
●	F763105.TM1401	105	46	37,5	35	26	19	20/-	25	23,5	2	M14	21	91
●	F763125.TM1201	125	54	44	42,5	31	23	26/-	28,5	26	2	M12	31	152
●	F763125.TM1401	125	54	44	42,5	31	23	26/-	28,5	26	2	M14	31	160

Version F663 Solid hub

	Art.	D	H	h	d	c	m	d2	d3	d4	h3	d1 6H	Q	g
●	F663045.TM0601	45	21	18	16	11	10	-/-	11	10	1	M06	12,5	11
●	F663045.TM0801	45	21	18	16	11	10	-/-	11	10	1	M08	12,5	11
●	F663045.TM1001	45	21	18	16	11	10	-/-	11	10	1	M10	12,5	11
●	F663065.TM0801	65	28	23,5	22	16,5	11,5	-/-	15,5	13,5	1,5	M08	15,5	25
●	F663065.TM1001	65	28	23,5	22	16,5	11,5	-/-	15,5	13,5	1,5	M10	15,5	26
●	F663065.TM1201	65	28	23,5	22	16,5	11,5	-/-	15,5	13,5	1,5	M12	15,5	28
●	F663085.TM0801	85	37	30,5	30	21	16	18/-	21	13	2	M08	13,5	50
●	F663085.TM1001	85	37	30,5	30	21	16	18/-	21	13	2	M10	13,5	52
●	F663085.TM1201	85	37	30,5	30	21	16	18/-	21	13	2	M12	13,5	52
●	F663105.TM1001	105	46	37,5	35	26	19	20/-	25	23,5	2	M10	23	88
●	F663105.TM1201	105	46	37,5	35	26	19	20/-	25	23,5	2	M12	23	88
●	F663105.TM1401	105	46	37,5	35	26	19	20/-	25	23,5	2	M14	21	91
●	F663105.TM1401	105	46	37,5	35	26	19	-/-	25	23,5	2	(*) M16	21	108
●	F663125.TM1201	125	54	44	42,5	31	23	26/-	28,5	26	2	M12	31	152
●	F663125.TM1401	125	54	44	42,5	31	23	26/-	28,5	26	2	M14	31	160
●	F663125.TM1601	125	54	44	42,5	31	23	-/-	28,5	26	2	(*) M16	31	180
●	F663125.TM1801	125	54	44	42,5	31	23	-/-	28,5	26	2	(*) M18	31	186

Presumable presence in the stock in %

||||| 90% (●) 40% (●) 5% (●)

SOLID 3 LOBE HANDWHEEL WITH MALE THREADED STUD

F664-F764



Material:

Reinforced polyamide.
Oils and greases resistant.

Surface:

Satin.

Colour:

Black (RAL 9011).

Main Insert:

Zinc plated steel threaded stud (tolerance 6g).



Hub:

F664= Solid version.

F764= Hollow underneath version.

SPECIAL REQUESTS:

- It is possible to supply inserts in different lengths or by special design, on request and for quantities.
- It is possible to supply inserts in different materials, on request and for quantities.
- It is possible to supply colours as shown in the table on page F-35, on request and for quantities.

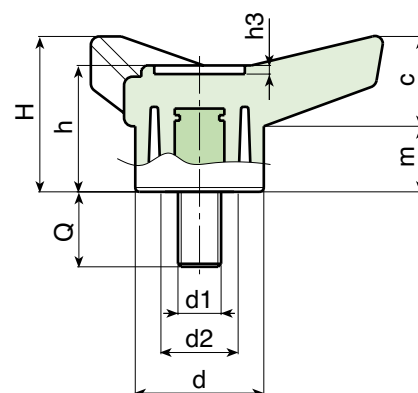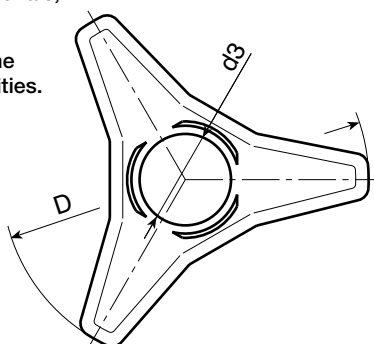

Version F764 Hollow underneath hub

Art.	D	H	h	d	c	m	d2	d3	h3	LM	d1 6g	Q	Δ g
F764085.TM08X..01	85	37	30,5	30	21	16	18/-	21	2	60	M08	20-30-40	61-65-69
F764085.TM10X..01	85	37	30,5	30	21	16	18/-	21	2	60	M10	20-30-40	66-74-80
F764085.TM12X..01	85	37	30,5	30	21	16	18/-	21	2	60	M12	20-30	83-89
F764105.TM10X..01	105	46	37,5	35	26	19	20/-	25	2	80	M10	30-50	116-122
F764105.TM12X..01	105	46	37,5	35	26	19	20/-	25	2	80	M12	30-50	121-136
F764105.TM14X..01	105	46	37,5	35	26	19	20/-	25	2	80	M14	A.R.	-
F764125.TM12X..01	125	54	44	42,5	31	23	26/-	28,5	2	100	M12	A.R.	-
F764125.TM14X..01	125	54	44	42,5	31	23	26/-	28,5	2	100	M14	A.R.	-

Version F664 Solid hub

Art.	D	H	h	d	c	m	d2	d3	h3	LM	d1 6g	Q	Δ g
F664045.TM06X..01	45	21	18	16	11	10	-/-	11	1	60	M06	20-30	14-17
F664045.TM08X..01	45	21	18	16	11	10	-/-	11	1	60	M08	20-25-30	19-20,5-22
F664045.TM10X..01	45	21	18	16	11	10	-/-	11	1	60	M10	A.R.	-
F664065.TM08X..01	65	28	23,5	22	16,5	11,5	-/-	15,5	1,5	80	M08	20-25-30	36-37,5-39
F664065.TM10X..01	65	28	23,5	22	16,5	11,5	-/-	15,5	1,5	80	M10	20-30-50	43-47-55
F664065.TM12X..01	65	28	23,5	22	16,5	11,5	-/-	15,5	1,5	80	M12	A.R.	-
F664085.TM08X..01	85	37	30,5	30	21	16	18/-	21	2	60	M08	20-25-30	61-65-69
F664085.TM10X..01	85	37	30,5	30	21	16	18/-	21	2	60	M10	25-30-40	66-74-80
F664085.TM12X..01	85	37	30,5	30	21	16	18/-	21	2	60	M12	20-30-40	83-87-94
F664105.TM10X..01	105	46	37,5	35	26	19	20/-	25	2	80	M10	20-30-40	113-116-122
F664105.TM12X..01	105	46	37,5	35	26	19	20/-	25	2	80	M12	30-50	121-136
F664105.TM14X5001	105	46	37,5	35	26	19	20/-	25	2	80	M14	50	152
F664125.TM12X3001	125	54	44	42,5	31	23	26/-	28,5	2	100	M12	30	200
F664125.TM14X3001	125	54	44	42,5	31	23	26/-	28,5	2	100	M14	30	219
F664125.TM16X3001	125	54	44	42,5	31	23	-/-	28,5	2	100	M16	30	232
F664125.TM18X..01	125	54	44	42,5	31	23	-/-	28,5	2	100	M18	A.R.	-

Enter the stud length choice in the two .. of the article code. Lengths by request with 150 pieces minimum quantity.

LM = Maximum mouldable length.

A.R. = By request. Minimum order quantity 150 pcs.

Presumable presence in the stock in %

() 90% () 40% () 5% ()



NOTE


[illegible]

COLOUR CHART

RAL COLOURS CODING

Colour		RAL	Cod.
Black		9011	01
Orange		2004	02
Orange		2011	03
White		9010	04
Blue		5002	05
Blue		5005	06
Blue		5015	07
Blue		5018	19
Blue		5019	21
Blue		5010	22
Yellow		1007	09
Yellow		1021	10
Grey		7024	12
Grey		7035	13
Red		3000	16
Green		6024	17

OTHER COLORS

Colour		Ref.	Cod.
White		-	52
Blue		-	53
Blue		pant. 645 U	54
Blue		pant. 300	55
Grey		-	57
Grey		-	59
Grey		NCS 7500	60
Red		-	64
Red		-	65
Natural		-	66
Green		-	70
Brown		-	71
Cream		-	72
Violet		-	73

ROLLMEX OY

TAMPERE

Takojankatu 4 - 33540 TAMPERE

Puh. 010-6661122

tampere@rollmex.fi

LAHTI

Karjalankatu 21 - 15140 LAHTI

Puh. 010-6661121

lahti@rollmex.fi

WWW.ROLLMEX.FI

